

Fire Suppression

General Products Catalogue



Automatic Sprinklers
System Valves & Devices
Piping & Electrical Products

FIRE SUPPRESSION

General Products Catalogue

Johnson Controls leads the industry in water-based fire suppression products, offering one of the broadest product lines globally. Through ongoing, world-class research and development, we're continually expanding our capabilities. Our solutions include brands that have led the fire protection industry for decades – with over 150 years in the industry, we are uniquely qualified to deliver cost-effective solutions customized to any building configuration and fire protection application.

The Johnson Controls team is committed to delivering products with dependable performance that have received independent approvals and certifications from industry agencies globally. Our state-of-the-art, international manufacturing facilities have all been granted ISO 9000 approvals and are routinely audited by independent testing agencies for quality and conformance. We also participate in many committees and several international standards and code-making bodies.

Johnson Controls fire suppression offering includes leading brands from across the fire protection industry with decades of industry knowledge and expertise. The brands leverage the global reach of Johnson Controls to bring customers effective solutions for a variety of applications.

TechXchange Academy

The state-of-the-art TechXchange academy offers on-site and online training courses to equip students with work-relevant training and on-the-job performance. These solutions, when applied in the workplace, increase the ability of our graduates to better create value for their organization and their customers.

It offers a various training courses such as Sprinkler Systems, WaterMist System and SprinkCAD Software.

To learn more, please visit www.onlinetechxchange.com

10 Year Limited Warranty

We have the unique distinction of standing behind the fire suppression products we manufacture by offering a 10 year limited warranty. This exhibits our commitment to product quality worldwide. Please see the General Terms and Conditions of Sale at www.tyco-fire.com.

Click on the brands to find out more.



TABLE OF CONTENTS

AUTOMATIC SPRINKLERS

Standard Spray Sprinklers	4 – 10
Extended Coverage Sprinklers	11 – 19
Storage Sprinklers	20 – 31
RAPID RESPONSE® Sprinklers	32 – 39
Dry Sprinklers	40 – 46
Special Purpose Sprinklers	47 – 58
Sprinkler Accessories	59 – 61
Nozzles & Nozzle Accessories	62 – 68

SYSTEM VALVES & DEVICES

Wet System Valves & Devices	69 – 73
Dry System Valves & Devices	74 – 77
Deluge & Preaction Systems	78 – 83
General Purpose Valves	84 – 89
Specialty Items & AQUAMIST	90 – 95

PIPING & ELECTRICAL PRODUCTS

GRINNELL® Grooved Piping Products	96 – 101
CPVC Pipe & Fittings	102 – 104
Electrical Devices	105 – 111
Corrosion Solutions	112 – 119

Index

Model Number	120
Keyword	121 – 122

SprinkCAD

Software Suite Overview	123
-----------------------------------	-----

All metric measurements throughout this catalogue are based on U.S. standard-to-metric conversions. Metric specifications may vary from country to country.



Standard Spray Sprinklers


Offered in a wide range of standard and quick response options for light and ordinary hazard occupancies.

- Office Buildings
- Schools
- Libraries
- Theaters
- Banks
- Retail

Standard Spray Sprinklers

TY-B


Upright, Pendent, & Recessed Pendent

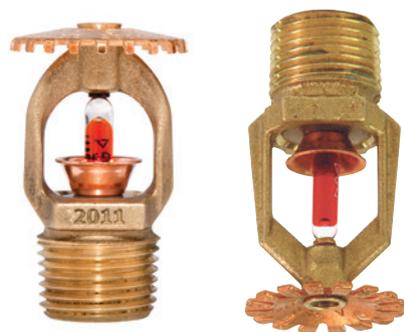

K Factor	K=2.8 (40,3) · K=5.6 (80,6) · K=8.0 (115,2)
Thread Size	1/2" NPT · 3/4" NPT
Approvals	K=2.8 – UL, C-UL, FM, NYC K=5.6 – UL, C-UL, FM, CE, VdS K=8.0 – UL, C-UL, FM, NYC, LPCB, VdS
Temperature	57°C (135°F), 68°C (155°F), 79°C (175°F), 93°C (200°F), 141°C (286°F), 182°C (360°F), Open
Escutcheon	K=5.6 – Style 15, Style 20 K=8.0 – Style 10, Style 40
Escutcheon Finish	Signal White, Pure White, Jet Black, Chrome Plated, Natural Brass
Sprinkler Finish	Natural Brass, Chrome Plated, Pure White, Signal White, Jet Black, Poly-Stainless, Lead Coated, Wax Coated, Wax over Lead Coated
SIN	TY1151, TY1251, TY315, TY325, TY4151, TY4251, TY4851, TY4951
Wrench Type	W-TYPE 6 / W-TYPE 7 (for recessed escutcheons)
Tech Data Sheet	K=2.8 & K=8.0 – TFP151 / K=5.6 – TFP152

All hazard ■ 5 mm bulb ■ Small frame, narrow profile bulb ■ Discharges a hemispherical water spray pattern in the area beneath the sprinkler ■ Designed for use in light, ordinary, or extra hazard, commercial occupancies such as banks, hotels, shopping malls, factories, refineries, chemical plants, etc.

Horizontal, Recessed Horizontal Sidewall & Vertical Sidewall

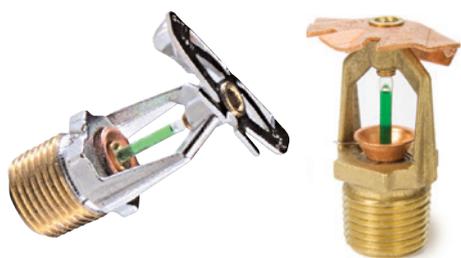

K Factor	K=5.6 (80,6)
Thread Size	1/2" NPT
Approvals	UL, C-UL, FM, NYC, LPCB
Temperature	57°C (135°F), 68°C (155°F), 79°C (175°F), 93°C (200°F), 141°C (286°F), 182°C (360°F), Open (HSW TY3351)
Escutcheon	Style 10
Escutcheon Finish	Signal White, Pure White, Jet Black, Chrome Plated, Natural Brass
Sprinkler Finish	Natural Brass, Chrome Plated, Pure White, Signal White, Jet Black, Poly-Stainless, Lead Coated, Wax Coated, Wax over Lead Coated
SIN	TY3351, TY3451
Wrench Type	W-TYPE 6 / W-TYPE 7 (for recessed escutcheons)
Tech Data Sheet	TFP161

Light hazard/Ordinary hazard ■ 5 mm bulb ■ Small frame ■ Unique deflector design of the horizontal sidewall sprinkler results in smaller profile ■ Designed for installation along a wall or the side of a beam just beneath a smooth ceiling ■ Water discharge is directed primarily outward and downward in a quarter spherical pattern ■ Sidewall sprinklers are often used in lieu of standard pendent or upright sprinklers due to building construction, economic considerations, or aesthetics ■ Special deflector on the vertical sidewall sprinkler allows it to be installed in either a pendent or upright position

Standard Spray Sprinklers

TY-FRB

Upright, Pendent, & Recessed Pendent



K Factor	K=2.8 (40,3) · K=4.2 (60,5) · K=5.6 (80,6) · K=8.0 (115,2)
Thread Size	1/2" NPT · 3/4" NPT
Approvals	K=2.8 – UL, C-UL, FM, NYC K=4.2 – UL, C-UL K=5.6 – UL, C-UL, FM, CE, VdS K=8.0 – UL, C-UL, FM, NYC, LPCB, VdS
Temperature	57°C (135°F), 68°C (155°F), 79°C (175°F), 93°C (200°F), 141°C (286°F)
Escutcheon	K=2.8, K=4.2 & K=8.0 – Style 10 · Style 20 · Style 30 · Style 40 K=5.6 – Style 15 · Style 20
Escutcheon Finish	Signal White, Pure White, Jet Black, Chrome Plated, Natural Brass
Sprinkler Finish	Natural Brass, Chrome Plated, Pure White, Signal White, Jet Black, Poly-Stainless, Lead Coated
SIN	TY313, TY323, TY1131, TY1231, TY2131, TY2231, TY3131, TY3231, TY4131, TY4231, TY4831, TY4931
Wrench Type	W-TYPE 6 / W-TYPE 7 (for recessed escutcheons)
Tech Data Sheet	K=2.8 thru K=8.0 – TFP171 , K=5.6 – TFP172

Light hazard/Ordinary hazard ■ 3 mm bulb ■ Small frame and narrow profile bulb enhance appearance ■ Hemispherical water spray pattern in the area beneath the sprinkler ■ Designed for use in commercial occupancies such as banks, hotels, and shopping malls.

Horizontal, Recessed Horizontal Sidewall & Vertical Sidewall



K Factor	K=5.6 (80,6)
Thread Size	1/2" NPT
Approvals	UL, C-UL, FM, NYC, LPCB
Temperature	57°C (135°F), 68°C (155°F), 79°C (175°F), 93°C (200°F), 141°C (286°F)
Escutcheon	Style 10 · Style 20
Escutcheon Finish	Signal White, Pure White, Jet Black, Chrome Plated, Brass Plated
Sprinkler Finish	Natural Brass, Chrome Plated, Pure White, Signal White, Jet Black, Poly-Stainless, Lead Coated
SIN	TY3331, TY3431
Wrench Type	W-TYPE 6 / W-TYPE 7 (for recessed escutcheons)
Tech Data Sheet	TFP176

Light hazard/Ordinary hazard ■ 3 mm bulb ■ Designed for use in applications where aesthetics must be considered or where building construction makes the installation of standard pendent or upright sprinklers impractical ■ Vertical sidewall sprinkler can be installed in either the pendent or upright position along a wall or the side of a beam and just below a smooth ceiling

Standard Spray Sprinklers

RFII

Concealed Pendant



K Factor	K=5.6 (80,6)
Thread Size	1/2" NPT
Approvals	3mm= UL, C-UL, NYC, VdS 5mm = UL, C-UL, FM, NYC, LPCB
Temperature	68°C/ 155°F - Sprinkler, 59°C/ 139°F - Cover Plate 93°C/ 200°F - Sprinkler, 74°C/ 165°F - Cover Plate
Cover Plate Finish	Chrome, Brushed Chrome, Brass, Brushed Brass, Signal White, Grey White, Pure White, Jet Black, Custom
SIN	SR-TY3551, QR-TY3531
Wrench Type	RFII
Tech Data Sheet	TFP181

Light hazard/Ordinary hazard ■ 5 mm bulb (standard) 3 mm bulb (quick) ■ Internally threaded closure with 12,7 mm ($\frac{1}{2}$ ") of adjustment ■ Concealed in an enclosed escutcheon plate with flat cover for use in those applications where aesthetics is a primary consideration ■ Separable, two-piece design of the mounting cup and cover plate allows installation of the sprinklers and pressure testing of the fire protection system prior to installation of a suspended ceiling or application of the finish coating to a fixed ceiling ■ Available with optional dust and air seal

RFII-MRI

Concealed Pendant



K Factor	K=5.6 (80,6)
Thread Size	1/2" NPT
Approvals	3mm= UL, C-UL, FM (SR) 5mm = UL, C-UL, FM
Temperature	68°C/ 155°F - Sprinkler, 59°C/ 139°F - Cover Plate 93°C/ 200°F - Sprinkler, 74°C/ 165°F - Cover Plate
Cover Plate Finish	Brass, Signal White, Grey White, Jet Black, Custom
SIN	SR-TY3550, QR-TY3530
Wrench Type	RFII
Tech Data Sheet	TFP182

Light hazard/Ordinary hazard ■ 5 mm bulb (standard) 3 mm bulb (quick) ■ Internally threaded closure with 12,7 mm ($\frac{1}{2}$ ") of adjustment ■ Concealed in an enclosed escutcheon plate with flat cover for use in those applications where aesthetics is a primary consideration ■ Separable, two-piece design of the mounting cup and cover plate allows installation of the sprinklers and pressure testing of the fire protection system prior to installation of a suspended ceiling or application of the finish coating to a fixed ceiling ■ Available with optional dust and air seal ■ Non-Magnetic Model Concealed Pendant Sprinkler Quick & Standard Response, Standard Coverage

Standard Spray Sprinklers

RFII

Concealed Horizontal Sidewall



K Factor	K=5.6 (80,6)
Thread Size	1/2" NPT
Approvals	UL, C-UL
Temperature	71°C/160°F - Sprinkler, 59°C/139°F - Cover Plate 100°C/212°F - Sprinkler, 74°C/165°F- Cover Plate
Cover Plate Finish	Ivory, Beige, Pure White, Signal White, Grey White, Brown, Black, Brushed Chrome, Brushed Brass, Custom Paint
SIN	TY3521
Wrench Type	W-TYPE 37
Tech Data Sheet	TFP185

Light hazard/Ordinary hazard ■ Solder Type ■ Internally threaded closure with 12,7 mm (1/2") of adjustment ■ Concealed in an enclosed escutcheon plate with flat cover for use in those applications where aesthetics is a primary consideration ■ Separable, two-piece design of the mounting cup and cover plate allows installation of the sprinklers and pressure testing of the fire protection system prior to installation of a suspended ceiling or application of the finish coating to a fixed ceiling ■ Available with optional dust and air seal

ILLUSION™

Concealed Standard Coverage Pendent Sprinklers



K Factor	K=11.2 (161,3)
Thread Size	3/4" NPT
Approvals	UL, C-UL
Temperature	71°C/160°F - Sprinkler - 59°C/139°F - Cover Plate, 100°C/212°F - Sprinkler - 74°C/165°F - Cover Plate
Cover Plate Finish	Chrome , Brush Chrome, Brass, Signal White, Grey White, Pure White, Custom
SIN	TY5521
Wrench Type	W-TYPE 18
Tech Data Sheet	TFP184

Extra large orifice/Special hazard ■ Coverage per NFPA 13 ■ Available with optional dust and air seal ■ The ILLUSION is concealed in an enclosed escutcheon plate with flat cover for use in those applications where architecturally sensitive areas such as casinos, hotel lobbies, office buildings, churches and restaurants

Standard Spray Sprinklers

TY-L

Upright, Pendent, & Recessed Pendent



K Factor	K=5.6 (80,6) • K=8.0 (115,2)
Thread Size	1/2" NPT • 3/4" NPT
Approvals	UL, C-UL, FM, LPCB
Temperature	74°C/165°F, 100°C/212°F, 138°C/280°F
Escutcheon	Style 20 • Style 30
Escutcheon Finish	Signal White, Chrome Plated, Brass Plated
Sprinkler Finish	Natural Brass, Chrome Plated, Lead Coated, Wax over Lead Coated, Wax Coated
SIN	TY3111, TY3211, TY4111 TY4211, TY4811, TY4911
Wrench Type	W-TYPE 9 / W-TYPE 10 (for recessed escutcheons)
Tech Data Sheet	TFP110

All hazard ■ Solder type ■ Discharges a hemispherical water spray pattern in the area beneath the sprinkler ■ Designed for use in light, ordinary, and extra hazard, commercial occupancies such as banks, hotels, shopping malls, factories, refineries, chemical plants, etc.

Horizontal Sidewall



K Factor	K=5.6 (80,6)
Thread Size	1/2" NPT
Approvals	UL, C-UL, FM
Temperature	74°C/165°F, 100°C/212°F, 138°C/280°F,
Sprinkler Finish	Natural Brass, Chrome Plated, Lead Coated, Wax Coated, Wax over Lead Coated
SIN	TY3311
Wrench Type	W-TYPE 9
Tech Data Sheet	TFP120

Light hazard / Ordinary hazard ■ Solder type ■ Suited for hotels, nursing homes and hospitals ■ Design allows piping to be confined to corridors, closets or service areas ■ They are designed for installation along a wall or the side of a beam and just beneath a smooth ceiling.

Standard Spray Sprinklers

TY-FRL

Upright, Pendent, & Recessed Pendent



K Factor	K=2.8 (40,3) · K=5.6 (80,6) · K=8.0 (115,2)
Thread Size	1/2" NPT · 3/4" NPT
Approvals	2.8 =UL, C-UL, NYC 5.6 =UL, C-UL, FM, NYC, LPCB 8.0 = UL, C-UL, FM, NYC
Temperature	74°C/165°F, 100°C/212°F
Escutcheon	1/2" NPT - Style 20 3/4" NPT - Style 30
Escutcheon Finish	White Coated, Chrome Plated, Brass Plated
Sprinkler Finish	Natural Brass, Chrome Plated
SIN	TY1121, TY1221, TY3121 TY3221, TY4121, TY4221
Wrench Type	W-TYPE 9 / W-TYPE 12 (for recessed escutcheons)
Tech Data Sheet	TFP130

Light hazard/Ordinary hazard - light hazard K=2.8 (40,3) ■ Solder type ■ Typically used in hotels, motels, office buildings and other commercial and industrial applications

Horizontal Sidewall



K Factor	K=5.6 (80,6)
Thread Size	1/2" NPT
Approvals	UL, C-UL, FM, NYC
Temperature	74°C/165°F, 100°C/212°F
Sprinkler Finish	Natural Brass, Chrome Plated
SIN	TY3321
Wrench Type	W-TYPE 9
Tech Data Sheet	TFP140

Light hazard/Ordinary hazard ■ Solder type ■ Designed for compact installation along a wall or on the side of a beam just beneath a smooth ceiling ■ Generally used in lieu of pendent or upright sprinklers because of aesthetics, building construction, where piping across the ceiling is not desirable.



Extended Coverage Sprinklers

Intended for protection of areas larger than those specified in standard installation rules and specific light, ordinary and extra hazard occupancies.

- Office Buildings
- Hotels
- Hospitals
- Libraries
- High-Piled Storage
- "Big Box" Retailing

Extended Coverage Sprinklers

EC-25

Upright



K Factor	K=25.2 (362,9)
Thread Size	1" NPT or ISO 7-R1
Approvals	UL, C-UL, FM, NYC
Temperature	74°C/165°F, 100°C/212°F
Sprinkler Finish	Natural Brass
SIN	TY9128
Wrench Type	W-TYPE 1
Tech Data Sheet	TFP213

For use in high density applications such as "big box" retailing, extra hazard, and high-piled storage occupancies ■ Solder type ■ CMDA and CMSA Applications and FM Approved for storage and non-storage applications ■ Minimum operating pressure of 0,48 bar (7 psi) ■ The maximum coverage area per sprinkler is 18,2 m² (196 ft.²), which is almost double the area offered by standard coverage sprinklers used for similar applications.

EC-11 & EC-14

Upright, Pendent & Recessed Pendent



K Factor	K=11.2 (161,3) • K=14.0 (201,6)
Thread Size	3/4" NPT
Approvals	UL, C-UL, FM, NYC
Temperature	57°C/135°F, 68°C/155°F, 79°C/175°F, 93°C/200°F, 141°C/286°F, Open
Escutcheon	Style 30 • Style 40 • Style 60
Escutcheon Finish	White Coated, Chrome Plated, Brass Plated
Sprinkler Finish	Natural Brass, Chrome Plated, Signal White, Jet Black, Lead Coated
SIN	TY5137, TY5237, TY6137, TY6237
Wrench Type	W-TYPE 3 / W-TYPE 22 (for recessed escutcheons)
Tech Data Sheet	TFP220

Light hazard/Ordinary hazard ■ 3 mm bulb ■ Designed for maximum coverage applications of 37,2 m² (400 ft²) - 4,3 m x 4,3 m (14' x 14') up to 6,1 m x 6,1 m (20' x 20') ■ Low profile decorative glass bulb spray sprinklers ■ Series EC-11 and EC-14 Sprinklers feature a UL and C-UL Listing that permits their use with unobstructed or non-combustible obstructed ceiling construction as defined and permitted by NFPA 13, as well as a specific application listing for use under concrete tees.

Extended Coverage Sprinklers

EC-8

Pendent & Recessed Pendent



K Factor	K=8.0 (115,2)
Thread Size	3/4" NPT
Approvals	UL, C-UL, FM, NYC
Temperature	57°C/135°F, 68°C/155°F
Escutcheon	Style 30 · Style 40
Escutcheon Finish	Natural Brass, Signal White, Chrome Plated
Sprinkler Finish	Natural Brass, Signal White Polyester, Chrome Plated
SIN	TY4232
Wrench Type	W-TYPE 3 / W-TYPE 23 (for recessed escutcheons)
Tech Data Sheet	TFP223

Light hazard ■ 3 mm bulb ■ Covers areas as large as 6,1 m x 6,1 m (20' x 20') ■ The recessed version of the EC-8, intended for use in areas with a finished ceiling, uses either the two-piece Recessed Escutcheon ■ The Series EC-8 Extended Coverage Pendent Sprinklers are decorative glass bulb sprinklers designed for use in light hazard occupancies.

EC-8C

Pendent & Recessed Pendent



K Factor	K=8.0 (115,2)
Thread Size	3/4" NPT
Approvals	UL
Temperature	68°C/155°F, 93°C/200°F
Escutcheon	Style 30 · Style 40
Escutcheon Finish	Natural Brass, Signal White, Pure White, Jet Black, Chrome Plated
Sprinkler Finish	Natural Brass, Signal White, Pure White, Jet Black, Chrome Plated
SIN	TY4282
Wrench Type	W-TYPE 6 / W-TYPE 7 (for recessed escutcheons)
Tech Data Sheet	TFP226

Light hazard ■ 3 mm bulb ■ Specifically designed for use in long, narrow spaces such as corridors or hallways with a maximum coverage area of 8,5 m x 3,1 m (28' by 10') ■ The recessed version of the EC-8C, intended for use in areas with a finished ceiling, uses either the two-piece Recessed Escutcheon ■ The Series EC-8C Extended Coverage Pendent Sprinklers are decorative glass bulb sprinklers designed for use in light hazard occupancies.

Extended Coverage Sprinklers

EC-5

Pendent & Recessed Pendent



K Factor	K=5.6 (80,6)
Thread Size	1/2" NPT
Approvals	UL, C-UL, FM, NYC
Temperature	57°C/135°F, 68°C/155°F
Escutcheon	Style 50
Escutcheon Finish	Signal White, Chrome Plated, Brass Plated
Sprinkler Finish	Natural Brass, Chrome Plated, Signal White Polyester
SIN	TY3232
Wrench Type	W-TYPE 6 / W-TYPE 7 (for recessed escutcheons)
Tech Data Sheet	TFP228

Light hazard ■ 3 mm bulb ■ Coverage up to 6,1 m x 6,1 m (20' x 20')

Horizontal Sidewall & Recessed Horizontal Sidewall



K Factor	K=5.6 (80,6)
Thread Size	1/2" NPT
Approvals	UL, C-UL, FM, NYC
Temperature	57°C/135°F, 68°C/155°F, 93°C/200°F
Escutcheon	Style 50
Escutcheon Finish	Signal White, Chrome Plated, Brass Plated
Sprinkler Finish	Signal White, Pure White, Natural Brass, Chrome Plated
SIN	TY3302
Wrench Type	W-TYPE 6 / W-TYPE 7 (for recessed escutcheons)
Tech Data Sheet	TFP298

Light hazard ■ 3 mm bulb ■ Coverage up to 4,9 m x 7,3 m (16' x 24') ■ Designed for use in hydraulically calculated sprinkler systems in commercial occupancies such as churches, restaurant seating areas, hotels, educational facilities, offices, etc.

Extended Coverage Sprinklers

EC-HS

Extended Coverage Horizontal Sidewall Sprinklers



K Factor	K=80 (115.2)
Thread Size	1/2" NPT
Approvals	VdS
Temperature	57°C/135°F, 68°C/155°F, 79°C/174°F
Escutcheon	Style 10 or Style 20
Escutcheon Finish	Recessed Escutcheon: Brass Plated Pure White, or Chrome Plated.
Sprinkler Finish	Refer to Table B of TFP288
SIN	TY3330
Wrench Type	W-Type 6 Wrench, P/N 56-000-6-387 W-Type 7 Recessed Wrench, P/N 56-850-4-001
Tech Data Sheet	TFP288

The Model EC-HS, 80 K-factor, Extended Coverage Horizontal Sidewall Sprinklers are extended coverage, decorative 3 mm glass bulb type spray sprinklers. ■ They are to be installed per VdS CEA 4001 under smooth ceilings in Light or Ordinary Hazard 1, as well as in accordance with Annex E of VdS CEA 4001 (e.g., commercial occupancies such as churches, restaurant seating areas, hotels, educational facilities, offices, etc.)

TY-FRB

Horizontal Sidewall & Recessed Horizontal Sidewall



K Factor	K=5.6 (80,6) · K=8.0 (115,2)
Thread Size	1/2" NPT · 3/4" NPT
Approvals	UL, C-UL, FM, NYC
Temperature	57°C/135°F, 68°C/155°F, 79°C/175°F
Escutcheon	Style 10 · Style 20 · Style 30 · Style 40
Escutcheon Finish	White Coated, Chrome Plated, Brass Plated
Sprinkler Finish	Natural Brass, Pure White, Signal White, Jet Black, Chrome Plated
SIN	TY3332, TY4332
Wrench Type	W-TYPE 6 / W-TYPE 7 (for recessed escutcheons)
Tech Data Sheet	TFP296

Light hazard ■ 3 mm bulb ■ Two-piece escutcheon converts sidewall sprinklers into low profile sprinkler assemblies with coverage areas up to 4,9 m x 6,7 m (16' x 22') for K=5.6 and 4,9 m x 7,3 m (16' x 24') for K=8.0 ■ Provides 19,1 mm (3/4" NPT) of horizontal adjustment from the recessed sidewall position ■ Quick & Standard Response (see tech data sheet) ■ Decorative sprinklers designed for use in hydraulically calculated sprinkler systems in light hazard, commercial occupancies such as churches, restaurant seating areas, hotels, educational facilities, offices, etc.

Extended Coverage Sprinklers

TY-FRL

Horizontal Sidewall




K Factor	K=5.6 (80,6) · K=8.0 (115,2)
Thread Size	1/2" NPT · 3/4" NPT
Approvals	UL, C-UL, FM, NYC
Temperature	74°C/165°F
Sprinkler Finish	Natural Brass, Chrome Plated
SIN	TY3322, TY4322
Wrench Type	W-TYPE 9
Tech Data Sheet	TFP280

Light hazard ■ Solder type ■ Coverage up to 4,9 m (16 ft.) wide by 7,3 m (24 ft.) long, they are designed for installation along a wall or the side of a beam and just beneath a smooth, flat, horizontal ceiling ■ Designed for use in commercial occupancies such as churches, restaurant seating areas, hotels, educational facilities, offices, etc.

ELO SW-20/SW-24

Horizontal Sidewall

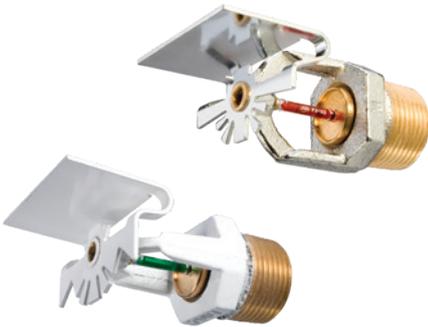

K Factor	K=11.2 (161,3)
Thread Size	3/4" NPT
Approvals	UL, C-UL, NYC
Temperature	68°C/155°F, 93°C/ 200°F
Sprinkler Finish	Natural Brass, Chrome Plated, Signal White
SIN	TY5332, TY5337
Wrench Type	W-TYPE 3
Tech Data Sheet	TFP230

Extended Coverage Ordinary Hazard (ECOH) ■ 3 mm bulb ■ SW-20 Listed to a 4,9 m (16'-0") wide and a 6,1 m (20'-0") throw maximum coverage area, SW-24 Listed to a 4,9 m (16'-0") wide and a 7,3 m (24'-0") throw maximum coverage area ■ Standard Response, Extended Coverage Ordinary Hazard (ECOH) Horizontal Sidewall Sprinklers are decorative glass bulb sprinklers designed for use in ordinary hazard occupancies per NFPA 13

Extended Coverage Sprinklers

ELOC

Extra Large Orifice Concealed Pendent



K Factor	K=11.2 (161,3)
Thread Size	3/4" NPT
Approvals	UL, C-UL, NYC
Temperature	71°C/160°F – Sprinkler – 59°C/139°F – Cover Plate, 100°C/ 212°F – Sprinkler – 74°C/165°F – Cover Plate
Cover Plate Finish	Chrome Plated, Brass Plated, Signal White, Grey White, Custom
SIN	TY5522
Wrench Type	W-TYPE 18
Tech Data Sheet	TFP250

Light hazard ■ Extra Large Orifice Concealed (ELOC) Pendent Sprinklers are decorative, fast response solder type sprinklers featuring a flat cover plate designed to conceal the sprinkler ■ Covers 37,2 m² (400 sq. ft.) using less pressure than a standard 12,7 mm (1/2") sprinkler at 20,3 m² (225 sq. ft.) ■ Available with optional dust and air seal ■ Concealed in an enclosed escutcheon plate with flat cover for use in those applications where aesthetics is a primary consideration.

CHEC

Concealed Horizontal Extended Coverage Sidewall



K Factor	K=8.0 (115,2)
Thread Size	3/4" NPT
Approvals	UL, C-UL, NYC
Temperature	68°C/155°F – Sprinkler, 59°C/139°F – Cover Plate
Cover Plate Finish	Signal White, Pure White, Chrome, Custom
SIN	TY4332
Wrench Type	W-TYPE 7
Tech Data Sheet	TFP265

Light hazard ■ 3 mm bulb ■ Coverage up to 4,9 m x 4,9 m (16' x 16') ■ Lowest flows & pressures allowed by NFPA 13 ■ 1/2" adjustment ■ 12" maximum deflector distance from ceiling ■ No "Slots" in cover plate ■ It is the best choice for architecturally sensitive areas such as dormitories, hotel rooms, reception areas, office buildings, banquet facilities, conference rooms, and hospitals.

Extended Coverage Sprinklers

RFII

Concealed Pendent



K Factor	K= 5.6 (80.6)
Thread Size	1/2" NPT
Approvals	UL, C-UL, NYC
Temperature	68°C (155°F) - Sprinkler 59°C (139°F) - Cover Plate, 93°C (200°F) - Sprinkler 74°C (165°F) - Cover Plate
Cover Plate Finish	Chrome, Brass, Pure White, Signal White, Grey White, Jet Black, Custom
SIN	TY3532
Wrench Type	RFII
Tech Data Sheet	TFP260

Light hazard ■ 3 mm bulb ■ Maximum 6,1 m x 6,1 m (20' x 20') QR Listing ■ Internally threaded closure with 12,7 mm (1/2") of adjustment ■ Separable, two-piece design of the mounting cup and cover allows installation of the sprinklers and pressure testing of the fire protection system prior to installation of a suspended ceiling or application of the finish coating to a fixed ceiling ■ Concealed in an enclosed escutcheon plate with flat cover for use in those applications where aesthetics is a primary consideration.

RFII-MRI

Concealed Pendent




K Factor	K= 5.6 (80.6)
Thread Size	1/2" NPT
Approvals	UL, C-UL
Temperature	68°C (155°F) - Sprinkler 59°C (139°F) - Cover Plate, 93°C (200°F) - Sprinkler 74°C (165°F) - Cover Plate
Cover Plate Finish	Brass, Signal White, Grey White, Jet Black, Custom
SIN	TY3537
Wrench Type	RFII
Tech Data Sheet	TFP262

Non-magnetic flat-plate concealed sprinkler for MRI room applications ■ Tested up to 7 Tesla (standard MRI apparatus is typically 3 Tesla) ■ Concealed in an enclosed escutcheon plate with flat cover ■ Separable, two-piece design of the mounting cup and cover allows installation of the sprinklers and pressure testing of the fire protection system prior to installation of a suspended ceiling or application of the finish coating to a fixed ceiling ■ Internally threaded closure with 12,7 mm (1/2") of adjustment ■ Extended coverage option designed to protect standardized MRI rooms with fewer sprinklers (up to 5 fewer than standard coverage) ■ Maximum 20Ft. x 20Ft. (6,1 m x 6,1 m) QR Listing

Extended Coverage Sprinklers

RFIII

Flat Plate Concealed Horizontal Extended Coverage Sidewall

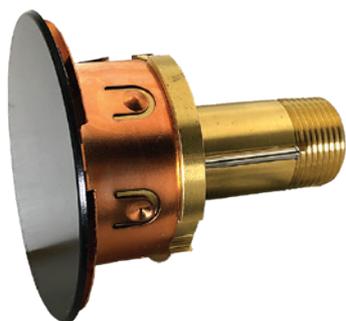

K Factor	K=8.0 (115,2)
Thread Size	3/4" NPT
Approvals	UL, C-UL
Temperature	71°C/160°F - Sprinkler 59°C/139°F - Cover Plate
Cover Plate Finish	Ivory, Beige, Pure White, Signal White, Grey White, Brown, Black, Brushed Chrome, Brushed Brass, Custom Paint
SIN	TY4522
Wrench Type	W-Type 37
Tech Data Sheet	TFP270

Light hazard ■ Decorative, link type, sprinkler featuring a unique flat cover designed to conceal the sprinkler within a wall ■ The sprinkler is the best choice for architecturally sensitive areas such as dormitories, hotel rooms, reception areas, office buildings, banquet facilities, conference rooms, and hospitals ■ The Model RFIII ECLH Concealed HSW Sprinklers are designed for installation along a wall or the side of a beam, and beneath a smooth level ceiling.



Storage Sprinklers

Intended for use in specific storage applications and include a broad offering of early suppression fast response (ESFR) sprinklers.

- High-Piled Storage
- Warehouse
- Box-In-Box Cold Storage
- High Challenge Occupancies
- In-Rack Storage
- Beneath Open Gridded Catwalks

Storage Sprinklers

ESFR-34

Pendent



K Factor	K=33.6 (480)
Thread Size	1-1/4" NPT or ISO 7-R1-1/4
Approvals	FM
Temperature	74°C/165°F, 100°C/212°F
Sprinkler Finish	Natural Brass
SIN	TY9286
Wrench Type	W-TYPE 26
Tech Data Sheet	TFP338

Early Suppression, Fast Response (ESFR) ■ Solder type ■ Direct attack on burning fuel by improved heavy sprinkler discharge
 ■ Suppression-mode sprinklers that are especially advantageous as a means of eliminating the use of in-rack sprinklers when protecting high-piled storage.

ESFR-25

Pendent



K Factor	K=25.2 (362,9)
Thread Size	1" NPT or ISO 7-R1
Approvals	UL, C-UL, FM, NYC, LPCB, VdS
Temperature	74°C/165°F, 100°C/212°F
Sprinkler Finish	Natural Brass
SIN	TY9226
Wrench Type	W-TYPE 1
Tech Data Sheet	TFP312

Early Suppression, Fast Response (ESFR) ■ Solder type ■ The TYCO Model ESFR-25 Pendent Sprinklers are listed by UL for Specific Applications with a ceiling height greater than 13,7 m (45 ft.) up to and including 14,6 m (48 ft.), and a storage arrangement up to and including 13,1 m (43 ft.) ■ Direct attack on burning fuel by improved heavy sprinkler discharge ■ Patented frame design substantially reduces the frame shadow effects that often produce non-uniformity in spray pattern, Novel orifice seal and unique fast response link design are the very latest in sprinkler technology ■ Suppression-mode sprinklers that are especially advantageous as a means of eliminating the use of in-rack sprinklers when protecting high-piled storage.

Storage Sprinklers

ESFR-22

Pendent



K Factor	K=22.4 (320)
Thread Size	1" NPT or ISO 7-R1
Approvals	UL, C-UL, FM, VdS, LPCB
Temperature	74°C/ 165°F, 100°C/212°F
Sprinkler Finish	Natural Brass
SIN	TY8223
Wrench Type	W-TYPE 1
Tech Data Sheet	TFP321

Early Suppression, Fast Response (ESFR) ■ Solder type ■ Suppression-mode sprinklers that are especially advantageous as a means of eliminating the use of in-rack sprinklers when protecting high-piled storage ■ Direct attack on burning fuel by improved heavy sprinkler discharge ■ The TYCO Model ESFR-22 Pendent Sprinklers are listed by UL and C-UL for Specific Applications with a ceiling height of 13,7 m (45 ft.) and a storage arrangement up to and including 12,2 m (40 ft.)

ESFR-17

Upright



K Factor	K=16.8 (241,9)
Thread Size	3/4" NPT
Approvals	FM
Temperature	74°C/165°F, 100°C/212°F
Sprinkler Finish	Natural Brass
SIN	TY7126
Wrench Type	W-TYPE 21
Tech Data Sheet	TFP316

Early Suppression, Fast Response (ESFR) ■ Solder type ■ Unique, upright design and large K-Factor overcome many pendent obstruction problems ■ Use of this sprinkler is especially advantageous as a means of eliminating the use of in-rack sprinklers when protecting rack storage arrangements, Primarily designed for use in ceiling only sprinkler systems.

Storage Sprinklers

ESFR-17

Pendent



K Factor	K=16.8 (241,9)
Thread Size	3/4" NPT
Approvals	UL, C-UL, FM
Temperature	74°C/165°F, 100°C/212°F
Sprinkler Finish	Natural Brass
SIN	TY7223
Wrench Type	W-TYPE 35
Tech Data Sheet	TFP317

Early Suppression, Fast Response (ESFR) ■ Solder type ■ Primarily designed for use in ceiling only sprinkler systems ■ Model ESFR-17 Pendent Sprinklers are designed to operate at substantially lower-end head pressures, as compared to ESFR Sprinklers having a nominal K-factor of 14.0 ■ They are suppression mode sprinklers that are especially advantageous as a means of eliminating in-rack sprinklers when protecting high-piled storage.

Pendent



K Factor	K=16.8 (241,9)
Thread Size	3/4" NPT or ISO 7-R 3/4
Approvals	UL, C-UL, FM
Temperature	68°C/155°F, 93°C/200°F
Sprinkler Finish	Natural Brass
SIN	TY7236
Wrench Type	W-TYPE 35
Tech Data Sheet	TFP322

Early Suppression, Fast Response (ESFR) ■ 3mm bulb type ■ Primarily designed for use in ceiling only sprinkler systems ■ Use of this sprinkler is especially advantageous as a means of eliminating the use of in-rack sprinklers when protecting rack storage arrangements ■ Available in two temperature ratings and Listed or Approved accordingly; 155°F (68°C) is UL and C-UL Listed and FM Approval; and 200°F (93°C) is UL and C-UL Listing only.

Pendent



K Factor	K=16.8 (241,9)
Thread Size	3/4" NPT or ISO 7-R 3/4
Approvals	UL, C-UL, FM, VdS, LPCB, NYC
Temperature	74°C /165°F, 100°C /212°F
Sprinkler Finish	Natural Brass
SIN	TY7226
Wrench Type	W-TYPE 21
Tech Data Sheet	TFP315

Early Suppression, Fast Response (ESFR) ■ Solder type ■ Primarily designed for use in ceiling only sprinkler systems ■ Model ESFR-17 Pendent Sprinklers are designed to operate at substantially lower-end head pressures, as compared to ESFR Sprinklers having a nominal K-factor of 14.0 ■ They are suppression mode sprinklers that are especially advantageous as a means of eliminating in-rack sprinklers when protecting high-piled storage.

Storage Sprinklers

ESFR-17

Dry-Type Pendent



K Factor	K=16.8 (241,9)
Thread Size	1-1/4" NPT or ISO 7-R 1-1/4
Grooved End	2" Standard Cut Grooved per Tech Data Sheet TFP1898
Approvals	UL, FM
Temperature	74°C/ 165°F, 100°C/ 212°F
Sprinkler Finish	Natural Brass
SIN	TY7229
Wrench Type	W-TYPE 26
Tech Data Sheet	TFP320

Early Suppression, Fast Response (ESFR) ■ Solder type ■ Eliminates in-rack sprinklers for box-in-box applications ■ Suppression mode sprinklers that are especially advantageous as a means of eliminating in-rack sprinklers when protecting high-piled box-in-box refrigerated storage areas ■ Less costly to install and maintain than pre-action or antifreeze systems ■ The Model ESFR-17 Dry Type Pendent Sprinkler is FM Approved and has successfully undergone full-scale fire testing at FM Global, when used in conformance with applicable FM Global Property Loss Prevention Data Sheets ■ The Model ESFR-17 Dry Type Sprinklers are primarily used for ceiling only sprinkler protection and used to protect solid piled, palletized, and rack storage that is subject to freezing temperatures

ULTRA K-17

Upright, Control Mode Specific Application



K Factor	K=16.8 (241,9)
Thread Size	3/4" NPT
Approvals	UL, C-UL, FM, NYC
Temperature	68°C/155°F, 93°C/200°F
Sprinkler Finish	Natural Brass
SIN	TY7153
Wrench Type	W-TYPE 8
Tech Data Sheet	TFP330

5 mm bulb ■ Approved for storage heights of 7,6 m (25') and building heights to 9,1 m (30') ■ Full-scale fire testing has shown that the Ultra K17 can control fires with commodities up to Group A plastics, and eliminate the need for in-rack sprinklers.

Upright, Control Mode Specific Application, 286° F



K Factor	K=16.8 (241,9)
Thread Size	3/4" NPT
Temperature	141°C/286°F
Sprinkler Finish	Natural Brass
Wrench Type	W-TYPE 8
Tech Data Sheet	Contact Tyco for Details

5 mm bulb ■ Control mode sprinkler

Storage Sprinklers

ESFR-14

Pendent



K Factor	K=14.0 (201,6)
Thread Size	3/4" NPT or ISO 7-1
Approvals	UL, C-UL, FM
Temperature	68°C/155°F, 93°C/200°F
Sprinkler Finish	Natural Brass
SIN	TY6236
Wrench Type	W-TYPE 34
Tech Data Sheet	TFP319

Early Suppression, Fast Response (ESFR) ■ 3mm bulb type ■ Designed for the protection of rack storage ■ Direct attack on burning fuel by improved heavy sprinkler discharge ■ They are suppression-mode sprinklers that are especially advantageous as a means of eliminating the use of in-rack sprinklers when protecting high-piled storage.

K17-231

Pendent & Upright



K Factor	K=16.8 (241,9)
Thread Size	3/4" NPT
Approvals	Upright= UL, C-UL, FM, NYC Pendent= UL, C-UL, NYC
Temperature	68°C/155°F, 93°C/200°F, 141°C/286°F
Sprinkler Finish	Natural Brass
SIN	TY7151, TY7251
Wrench Type	W-TYPE 8
Tech Data Sheet	TFP332

5 mm bulb ■ They are "standard response spray sprinklers" which produce a hemispherical water distribution pattern below the deflector ■ Low-pressure requirement (as low as 0.48 bar (7 psi)) can save cost by reducing branch line size, taking advantage of maximized spacing, and upgrading existing densities ■ Very large orifice sprinkler for use in high challenge storage occupancies.

ELO-231B

Pendent & Upright




K Factor	K=11.2 (161,3)
Thread Size	1/2" NPT · 3/4" NPT
Approvals	UL, C-UL, FM, NYC
Temperature	68°C/155°F, 93°C/200°F, 141°C/286°F
Sprinkler Finish	Brass, Chrome Plated, Lead Coated, Wax Coated, Wax over Lead Coated
SIN	TY5151, TY5251, TY5851
Wrench Type	W-TYPE 3
Tech Data Sheet	TFP342

5mm bulb ■ Extra large orifice sprinklers proven for storage through full-scale fire testing ■ Can be used as intermediate level version by adding a guard and shield ■ Designed to control high challenge fires with relatively low required pressures

Storage Sprinklers

ELO-231 FRB

Pendent & Upright

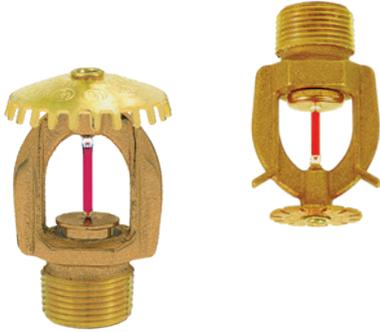

K Factor	K=11.2 (161,3)
Thread Size	1/2" NPT • 3/4" NPT
Approvals	UL, C-UL, FM, NYC, VdS, LPCB
Temperature	68°C/155°F, 93°C/200°F, 141°C/286°F
Sprinkler Finish	Natural Brass, Chrome Plated
SIN	TY5131, TY5231, TY5831
Wrench Type	W-TYPE 3
Tech Data Sheet	TFP344

3 mm bulb ■ Extra large orifice sprinklers proven for storage occupancies through full-scale fire testing ■ Can be used as intermediate level version by adding a guard and shield ■ Designed to control high challenge fires with relatively low required pressures

ELO-231

Pendent & Upright



K Factor	K=11.2 (161,3)
Thread Size	1/2" NPT • 3/4" NPT
Approvals	UL, C-UL, FM, NYC
Temperature	74°C/165°F, 100°C/212°F, 141°C/286°F
Sprinkler Finish	Natural Brass, Chrome Plated, Lead Coated, Wax Coated, Wax over Lead Coated
SIN	TY5111, TY5211, TY5811
Wrench Type	W-TYPE 3
Tech Data Sheet	TFP340

Solder type ■ Extra large orifice sprinklers proven for storage occupancies through full-scale fire testing ■ Can be used as intermediate level version by adding a guard and shield ■ Designed to control high challenge fires with relatively low required pressures

Storage Sprinklers

LD "Large Drop"

Upright, Control Mode Specific Application



K Factor	K=11.2 (161,3)
Thread Size	3/4" NPT
Approvals	UL, C-UL, NYC
Temperature	68°C/155°F, 93°C/200°F, 141°C/286°F
Sprinkler Finish	Natural Brass
SIN	TY5153
Wrench Type	W-TYPE 3
Tech Data Sheet	TFP335

5 mm bulb ■ Control mode sprinkler ■ Can provide a higher level of protection than standard spray sprinklers ■ Can provide an advantage by eliminating in-rack sprinklers ■ Designed for the protection of high-piled storage

TY-B

Pendent & Upright, Intermediate Level



K Factor	K=5.6 (80,6) · K=8.0 (115,2)
Thread Size	1/2" NPT · 3/4" NPT
Approvals	UL, C-UL, FM, NYC
Temperature	57°C/135°F, 68°C/155°F, 79°C/175°F, 93°C/200°F, 141°C/286°F, 182°C/360°F
Sprinkler Finish	Natural Brass, Lead Coated, Wax Coated, Wax over Lead Coated
SIN	TY3153, TY3251, TY4153, TY4251
Wrench Type	W-TYPE 6
Tech Data Sheet	TFP351

5 mm bulb ■ Intermediate level (in-rack) with shield ■ Used where sprinkler guards are not required ■ Factory assembled unit having an integral water shield ■ Both the Pendent and Upright Sprinklers produce a hemispherical water distribution pattern below the deflector.

Storage Sprinklers

TY-B

Pendent & Upright, Intermediate Level



K Factor	K=5.6 (80,6)
Thread Size	1/2" NPT
Approvals	UL, C-UL, FM
Temperature	57°C/135°F, 68°C/155°F, 79°C/175°F, 93°C/200°F, 141°C/286°F, 182°C/360°F
Sprinkler Finish	Natural Brass
Guard Finish	Red or Zinc
SIN	TY315, TY325
Wrench Type	W-TYPE 6
Tech Data Sheet	TFP352

5 mm bulb ■ Factory assembled unit having an integral water shield ■ Intermediate Level Sprinklers are primarily designed for use in rack storage sprinkler systems where their thermally sensitive elements must be shielded from the water spray of higher elevation sprinklers that could operate earlier during a fire ■ May also used in other applications such as beneath open gridded catwalks.

TY-FRB

Pendent & Upright, Intermediate Level



K Factor	K=5.6 (80,6) · K=8.0 (115,2)
Thread Size	1/2" NPT · 3/4" NPT
Approvals	UL, C-UL, FM, NYC
Temperature	57°C/135°F, 68°C/155°F, 79°C/175°F, 93°C/200°F, 141°C/286°F, 182°C/360°F
Sprinkler Finish	Natural Brass, Lead Coated
SIN	TY3133, TY3231, TY4133, TY4231
Wrench Type	W-TYPE 6
Tech Data Sheet	TFP356

3 mm bulb ■ Intermediate level with shield ■ Factory assembled unit having an integral water shield ■ Used where sprinkler guards are not required

Storage Sprinklers

TY-FRB

Pendent & Upright, Intermediate Level



K Factor	K=5.6 (80,6)
Thread Size	1/2" NPT
Approvals	UL, C-UL, FM
Temperature	57°C/135°F, 68°C/155°F, 79°C/175°F, 93°C/200°F, 141°C/286°F
Sprinkler Finish	Natural Brass
Guard Finish	Red or Zinc
SIN	TY313, TY323
Wrench Type	W-TYPE 6
Tech Data Sheet	TFP357

3 mm bulb ■ Factory assembled unit having an integral water shield ■ Intermediate Level Sprinklers are primarily designed for use in rack storage sprinkler systems where their thermally sensitive elements must be shielded from the water spray of higher elevation sprinklers that could operate earlier during a fire ■ May also be used in other applications such as beneath open gridded catwalks

TY-L

Pendent & Upright, Intermediate Level



K Factor	K=5.6 (80,6) · K=8.0 (115,2)
Thread Size	1/2" NPT · 3/4" NPT
Approvals	UL, C-UL, FM
Temperature	74°C/165°F, 100°C/212°F, 138°C/ 280°F
Sprinkler Finish	Natural Brass
SIN	TY3113, TY3211, TY4113, TY4211
Wrench Type	W-TYPE 9
Tech Data Sheet	TFP350

Solder type ■ Intermediate level with shield ■ Factory assembled unit having an integral water shield ■ Used where sprinkler guards are not required

Storage Sprinklers

TY-FRL

Pendent & Upright, Intermediate Level



K Factor	K=5.6 (80,6) • K=8.0 (115,2)
Thread Size	1/2" NPT • 3/4" NPT
Approvals	UL, C-UL, FM, NYC
Temperature	74°C/165°F
Sprinkler Finish	Natural Brass, Chrome Plated
SIN	TY3123, TY3221, TY4123, TY4221
Wrench Type	W-TYPE 9
Tech Data Sheet	TFP355

Solder type ■ Intermediate level with shield ■ Factory assembled unit having an integral water shield ■ Used where sprinkler guards are not required

Sprinkler Guards

Model G1 & G4 Sprinkler Guards
Model G1/S1 & G4/S3 Guards with Shields



G1

Approvals	UL, C-UL, FM
Guard Finishes	Plain Brass, Red Painted, Chrome Plated, Zinc Coated, Zinc Chromate
Tech Data Sheet	TFP780

Designed for use with specific types of Series TY-B, TY-FRB, TY-L, and TY-FRL Sprinklers that may be located in areas that make them susceptible to mechanical or physical damage ■ Rugged guard design to minimize possible damage to sprinklers ■ Shields are for use in storage racks or beneath grated mezzanine, or other areas requiring the sprinklers to be shielded from possible discharge from sprinklers above ■ Can be used with either 1/2" or 3/4" NPT sprinklers



S1



G4/S3 with Shield



G4



G4

Storage Sprinklers

Sprinkler Guards

Model G2 Sprinkler Guard, Model WS-2 Shield, and Model WSG-2 Sprinkler Guard with Shield



WSG-2 with Shield

Approvals	UL, C-UL, FM
Guard Finishes	Red Painted, Zinc Coated
Tech Data Sheet	TFP782

Designed for use with Series ELO-231, ELO-231B, or ELO-231FRB Sprinklers that may be located in areas that make them susceptible to mechanical or physical damage ■ Rugged guard design to minimize possible damage to sprinklers ■ Shields are for use in storage racks or beneath grated mezzanine, or other areas requiring the sprinklers to be shielded from possible discharge from sprinklers above ■ Can be used with either 1/2" or 3/4" NPT sprinklers



G2



WS-2 Shield

Model EG-25 Sprinkler Guard for Model ESFR-25 Pendent Sprinkler



Approvals	FM
Guard Finishes	Red Painted, Zinc Chromate
Tech Data Sheet	TFP784

Designed for use with the TYCO Model ESFR-25 Pendent Sprinkler and may be located in areas that make it susceptible to mechanical or physical damage ■ Provides protection from mechanical and/or physical damage, for example, rack storage sprinkler installations ■ Welded assembly fabricated from carbon steel



RAPID RESPONSE® Residential Sprinkler Systems

Offer optimum design and flow characteristics for all residential applications.

- Townhomes
- Assisted Living
- Multi-family
- Student Housing
- Single-family
- Beam and sloped ceilings
- Hotel / motel

Custom paint options available

We offer custom paint cover plates for sprinklers with this icon.
Learn more at www.tyco-fire.com/custompaint.



Rapid Response® Sprinklers

LFII

Pendent & Recessed Pendent



K Factor	K=4.9 (70,6)
Thread Size	1/2" NPT
Approvals	UL, C-UL, NSF/ANSI 61, WaterMark Certification
Temperature	68°C/155°F, 79°C/175°F
Escutcheon	Style 20
Sprinkler Finish	Pure White, Signal White, Jet Black, Chrome Plated, Natural Brass
SIN	TY2236
Wrench Type	W-TYPE 6, W-Type 7 (For recessed escutcheons)
Tech Data Sheet	TFP403

3 mm bulb type ■ Approved for special applications with beamed ceilings

Intended for use in wet & dry pipe scenarios:

- residential sprinkler systems for one/two-family dwellings and mobile homes per NFPA 13D
- residential occupancies up to and including four stories in height per NFPA 13R
- sprinkler systems for the residential portions of any occupancy per NFPA 13

Pendent & Recessed Pendent



K Factor	K=5.8 (83,5)
Thread Size	1/2" NPT
Approvals	UL, C-UL, NSF/ANSI 61
Temperature	68°C/155°F, 79°C/175°F
Escutcheon	Style 20
Sprinkler Finish	Signal White, Chrome Plated, Natural Brass, Jet Black, Pure White
SIN	TY3934
Wrench Type	W-TYPE 6, W-Type 7 (For recessed escutcheons)
Tech Data Sheet	TFP401

3 mm bulb type

Intended for use in these wet pipe scenarios:

- residential sprinkler systems for one/two-family dwellings and mobile homes per NFPA 13D
- residential occupancies up to and including four stories in height per NFPA 13R
- sprinkler systems for the residential portions of any occupancy per NFPA 13

Rapid Response® Sprinklers

LFII

Pendent & Recessed Pendent



K Factor	K=3.0 (43,2)
Thread Size	1/2" NPT
Approvals	UL, C-UL, NSF/ANSI 61
Temperature	68°C/155°F, 79°C/175°F
Escutcheon	Style 20
Sprinkler Finish	Signal White, Chrome Plated, Natural Brass
SIN	TY1234
Wrench Type	W-TYPE 6, W-Type 7 (For recessed escutcheons)
Tech Data Sheet	TFP402

3 mm bulb type ■ Decorative, fast response, frangible bulb sprinklers designed for use in residential occupancies such as homes, apartments, dormitories, and hotels.

Intended for use in these wet pipe scenarios:

- residential sprinkler systems for one/two-family dwellings and mobile homes per NFPA 13D
- residential occupancies up to and including four stories in height per NFPA 13R
- sprinkler systems for the residential portions of any occupancy per NFPA 13

Horizontal & Recessed Horizontal Sidewall



K Factor	K=4.4 (63,4)
Thread Size	1/2" NPT
Approvals	UL, C-UL, NSF/ANSI 61, WaterMark Certification
Temperature	68°C/155°F, 79°C/175°F
Escutcheon	Style 20
Sprinkler Finish	Signal White, Chrome Plated, Natural Brass
SIN	TY2334
Wrench Type	W-TYPE 6, W-Type 7 (For recessed escutcheons)
Tech Data Sheet	TFP412

3 mm bulb type

Intended for use in these wet pipe scenarios:

- residential sprinkler systems for one/two-family dwellings and mobile homes per NFPA 13D
- residential occupancies up to and including four stories in height per NFPA 13R
- sprinkler systems for the residential portions of any occupancy per NFPA 13

Rapid Response® Sprinklers

LFII

Horizontal & Recessed Horizontal Sidewall



K Factor	K=4.2 (60,5)
Thread Size	1/2" NPT
Approvals	UL, C-UL, NYC, NSF/ANSI 61, WaterMark Certification
Temperature	68°C/155°F, 79°C/175°F
Escutcheon	Style 20
Sprinkler Finish	Pure White, Signal White, Chrome Plated, Natural Brass
SIN	TY1334
Wrench Type	W-TYPE 6, W-Type 7 (For recessed escutcheons)
Tech Data Sheet	TFP410

3 mm bulb type ■ Approved for special applications with beamed ceilings

Intended for use in the following scenarios:

- wet and dry pipe residential sprinkler systems for one/two-family dwellings and mobile homes per NFPA 13D
- wet and dry pipe residential occupancies up to and including four stories in height per NFPA 13R
- wet and dry pipe sprinkler systems for the residential portions of any occupancy per NFPA 13

Flat Plate Concealed Pendent



K Factor	K=4.9 (70,6)
Thread Size	1/2" NPT
Approvals	UL, C-UL, NYC, NSF/ANSI 61, WaterMark Certification
Temperature	71°C/160°F - Sprinkler, 59°C/139°F - Cover Plate 100°C/212°F - Sprinkler, 74°C/165°F - Cover Plate
Cover Plate Finish	Ivory, Beige, Pure White, Signal White, Grey White, Brown, Black, Brushed Brass, Brushed Chrome, Bright Chrome, Custom Paint
SIN	TY3596
Wrench Type	W-TYPE 18
Tech Data Sheet	TFP442

Solder type ■ Provides 12,7 mm (1/2") vertical adjustment. This adjustment provides flexibility when cutting fixed sprinkler drops ■ Cover plate conceals sprinkler components above the ceiling

Intended for use in the following scenarios:

- wet and dry pipe residential sprinkler systems for one/two-family dwellings and mobile homes per NFPA 13D
- wet and dry pipe residential occupancies up to and including four stories in height per NFPA 13R
- wet and dry pipe sprinkler systems for the residential portions of any occupancy per NFPA 13

Rapid Response® Sprinklers

LFII

Domed Plate Concealed Pendant



K Factor	K=4.9 (70,6)
Thread Size	1/2" NPT
Approvals	UL, C-UL, NYC
Temperature	68°C/155°F - Sprinkler, 59°C/139°F - Cover Plate
Cover Plate Finish	Pure White, Signal White, Chrome, Custom
SIN	TY2234
Wrench Type	W-TYPE 7
Tech Data Sheet	TFP450

3 mm bulb type ■ Can be used for horizontal and sloped ceilings ■ Cover plate conceals sprinkler components above the ceiling

Intended for use in the following scenarios:

- wet and dry pipe residential sprinkler systems for one/two-family dwellings and mobile homes per NFPA 13D
- wet and dry pipe residential occupancies up to and including four stories in height per NFPA 13R
- wet and dry pipe sprinkler systems for the residential portions of any occupancy per NFPA 13

Concealed Horizontal Sidewall



K Factor	K=4.2 (60,5)
Thread Size	1/2" NPT
Approvals	UL, C-UL, NSF/ANSI 61
Temperature	71°C/160°F - Sprinkler, 59°C/139°F - Cover Plate
Cover Plate Finish	Ivory, Beige, Pure White, Signal White, Grey White, Brown, Black, Brushed Brass, Brushed Chrome, Custom Paint
SIN	TY2324
Wrench Type	W-TYPE 37
Tech Data Sheet	TFP445

Solder type ■ Can be used for horizontal and sloped ceilings ■ Cover plate conceals sprinkler components above the ceiling

Intended for use in the following scenarios:

- wet and dry pipe residential sprinkler systems for one/two-family dwellings and mobile homes per NFPA 13D
- wet and dry pipe residential occupancies up to and including four stories in height per NFPA 13R
- wet and dry pipe sprinkler systems for the residential portions of any occupancy per NFPA 13

Cover Plate & Protective Cap Utility Tool for Concealed Sprinklers



Used with the following Sprinklers	TY2524, TY3531, TY3532, TY3551, TY3596
Tech Data Sheet	Tyco for details

Install and remove cover plates for LFII, RFII, and RFIII concealed sprinklers ■ Also used for removing protective caps before cover plate installation

Rapid Response® Sprinklers

LFII

Dry Type Recessed Pendent



K Factor	K=4.9 (70,6)
Thread Size	1" NPT or ISO 7-R1
Approvals	UL, NSF/ANSI 61
Temperature	68°C/155°F, 79°C/175°F (wet pipe only)
Escutcheon Finish	Signal White, Chrome Plated, Natural Brass
Sprinkler Finish	Signal White, Chrome Plated, Natural Brass
SIN	TY2235
Wrench Type	W-TYPE 7
Tech Data Sheet	TFP460

3 mm bulb type ■ Where sprinklers are required on dry pipe systems that are exposed to freezing temperatures, or where sprinklers are seasonally drained to avoid freezing ■ Offer the features of non-water filled pipe in addition to not having to increase the number of design sprinklers (hydraulic design area) for systems designed to NFPA 13, 13D, or 13R

Intended for use in the following residential sprinkler systems scenarios:

- one/two-family dwellings and mobile homes per NFPA 13D
- residential occupancies up to and including four stories in height per NFPA 13R
- the residential portions of any occupancy per NFPA 13

Dry Type Recessed Horizontal Sidewall



K Factor	K=4.4 (63,4)
Thread Size	1" NPT or ISO 7-R1
Approvals	UL, NSF/ANSI 61
Temperature	68°C/155°F
Escutcheon Finish	Signal White, Chrome Plated, Natural Brass
Sprinkler Finish	Signal White, Chrome Plated, Natural Brass
SIN	TY2335
Wrench Type	W-TYPE 6, W-Type 7 (For recessed escutcheons)
Tech Data Sheet	TFP461

3 mm bulb type ■ The Series LFII Dry Type Residential Horizontal Sidewall Sprinklers are typically used where sprinklers and/ or a portion of the connecting piping are exposed to freezing temperatures ■ Offer the features of non-water filled pipe in addition to not having to increase the number of design sprinklers (hydraulic design area) for systems designed to NFPA 13, 13D, or 13R

Intended for use in the following residential sprinkler systems scenarios:

- one/two-family dwellings and mobile homes per NFPA 13D
- residential occupancies up to and including four stories in height per NFPA 13R
- the residential portions of any occupancy per NFPA 13

Rapid Response® Sprinklers

LFII - NFPA 13 Optimized Sprinklers

The large orifice 6.9 K, 5.8 K and 5.6 K sprinklers are primarily intended for residential use where there is a 0.1 gpm/sq. ft. density NFPA 13 design requirement, and are generally used for installations in excess of four stories. They are optimized for residential applications where this higher water-flow demand is required, and can meet those requirements with less pressure and smaller pipe sizes.

Pendent, Recessed Pendent & Domed Concealed

	K Factor	K=6.9 (99,4)
	Thread Size	3/4" NPT
	Approvals	UL, C-UL, FM, NYC, NSF/ANSI 61
	Temperature	68°C/155°F, 79°C/175°F, 59°C/139°F - Cover Plate
	Escutcheon	Style 30
	Escutcheon & Sprinkler Finish	Natural Brass, Chrome Plated, Pure White, Signal White
	Cover Plate Finish	Pure White, Signal White, Chrome, Custom
	SIN	TY4234
	Wrench Type	W-TYPE 6, W-Type 7 (For recessed escutcheons)
	Tech Data Sheet	TFP408

3 mm bulb type

Intended for use in the following scenarios:

- wet pipe residential sprinkler systems for one/two-family dwellings and mobile homes per NFPA 13D
- wet pipe residential occupancies up to and including four stories in height per NFPA 13R
- wet pipe sprinkler systems for the residential portions of any occupancy per NFPA 13

Horizontal & Recessed Horizontal Sidewall Sprinklers

	K Factor	K=5.8 (83,5)
	Thread Size	1/2" NPT
	Approvals	UL, C-UL, FM, NSF/ANSI 61
	Temperature	68°C/155°F, 79°C/175°F
	Escutcheon	Style 20
	Sprinkler Finish	Signal White, Chrome Plated, Natural Brass
	SIN	TY4334
	Wrench Type	W-TYPE 6, W-Type 7 (For recessed escutcheons)
	Tech Data Sheet	TFP417

3 mm bulb type ■ Can be used for horizontal and sloped ceilings

Intended for use in the following scenarios:

- wet pipe residential sprinkler systems for one/two-family dwellings and mobile homes per NFPA 13D
- wet pipe residential occupancies up to and including four stories in height per NFPA 13R
- wet pipe sprinkler systems for the residential portions of any occupancy per NFPA 13

Rapid Response® Sprinklers

LFII - NFPA 13 Optimized Sprinklers

The large orifice 6.9 K, 5.8 K and 5.6 K sprinklers are primarily intended for residential use where there is a 0.1 gpm/sq. ft. density NFPA 13 design requirement, and are generally used for installations in excess of four stories. They are optimized for residential applications where this higher water-flow demand is required, and can meet those requirements with less pressure and smaller pipe sizes.

Horizontal & Recessed Horizontal Sidewall Sprinklers



K Factor	K=5.6 (80,6)
Thread Size	1/2" NPT
Approvals	UL, C-UL, NSF/ANSI 61
Temperature	68°C/155°F, 79°C/175°F
Escutcheon	Style 20
Sprinkler Finish	Natural Brass, Chrome Plated, Pure White, Signal White
SIN	TY3334
Wrench Type	W-TYPE 6, W-Type 7 (For recessed escutcheons)
Tech Data Sheet	TFP415

3 mm bulb type ■ Can be used for horizontal and sloped ceilings

Intended for use in the following scenarios:

- wet pipe residential sprinkler systems for one/two-family dwellings and mobile homes per NFPA 13D
- wet pipe residential occupancies up to and including four stories in height per NFPA 13R
- wet pipe sprinkler systems for the residential portions of any occupancy per NFPA 13

RCP-1

Residential Control Panel



Size Range	DN25 or DN40 (1" or 1½")
Approvals	UL Listed
Maximum Water Pressure	20,7 bar (300 psi)
Air Pressure	0,7 bar (10 psi) to 4,5 bar (65 psi)
System	For use in residential dry pipe fire protection systems
Tech Data Sheet	TFP480

Model RCP-1 Residential Control Panel is an integrated valve manifold, air pressure, and electronic control package for controlling the release of water into residential dry pipe sprinkler systems ■ Pre-wired assembly containing pre-programmed control panel, system performance gauges, and an enclosed compressor ■ Supervised system valve system ■ Pre-engineered riser design ■ 48-hour battery backup



Dry Sprinklers

Specifically designed for areas where sprinklers may be subjected to freezing conditions.

- Unheated Warehouses
- Covered Exterior Platforms
- Loading Docks

Dry Sprinklers

DS-1

Pendent, Upright & Horizontal Sidewall



K Factor	K=5.6 (80,6)
Thread Size	1" NPT (Standard Order) ISO 7-R1
Approvals	Upright=UL, C-UL, FM, NYC, CE Pendent & HSW= UL, C-UL,CE, FM, NYC, LPCB, VdS
Temperature	57°C/135°F, 68°C/155°F, 79°C/175°F, 93°C/200°F, 141°C/286°F, 182°C/360°F
Escutcheon Finish	Signal White, Chrome Plated, Brass Plated
Sprinkler Finish	Natural Brass, Chrome Plated, Signal White
SIN	TY3255, TY3155, TY3355
Wrench Type	W-Type 7
Tech Data Sheet	TFP500

Standard coverage ■ All hazards (light hazards, horizontal sidewall) ■ 5 mm bulb ■ Lengths up to 1220 mm (48") ■ Designed for use in applications where sprinklers and/or connecting piping may be exposed to freezing conditions, or the sprinkler system is seasonally drained ■ Special assembly provides a seal at the main pipe to prevent water from entering the assembly until the sprinkler operates ■ Designed for use in applications requiring dry sprinklers, or where building construction or aesthetic considerations make the installation of dry horizontal sidewall sprinklers more desirable than the dry pendent type

Pendent, Upright & Horizontal Sidewall



K Factor	K=5.6 (80,6)
Thread Size	3/4" or 1" NPT (Std. Order) ISO 7-R1
Approvals	3/4"= UL, C-UL 1"= UL, C-UL, FM, NYC
Temperature	57°C/135°F, 68°C/155°F, 79°C/175°F, 93°C/200°F, 141°C/286°F
Escutcheon Finish	Signal White, Chrome Plated, Brass Plated
Sprinkler Finish	Natural Brass, Chrome Plated, Signal White
SIN	TY3235, TY3135, TY3335 TY3935, TY3735
Wrench Type	W-Type 7
Tech Data Sheet	TFP510

Light hazard/Ordinary hazard ■ 3 mm bulb ■ Designed for use in applications where sprinklers and/or connecting piping may be exposed to freezing conditions, or the sprinkler system is seasonally drained ■ Special assembly provides a seal at the main pipe to prevent water from entering the assembly until the sprinkler operates ■ Designed for use in applications requiring dry sprinklers, or where building construction or aesthetic considerations make the installation of dry horizontal sidewall sprinklers more desirable than the dry pendent type

Dry Sprinklers

DS-1

Extended Coverage Horizontal Sidewall



K Factor	K=5.6 (80,6)
Thread Size	1" NPT (Standard Order) ISO 7-R1
Approvals	UL, C-UL, NYC
Temperature	57°C/135°F, 68°C/155°F
Escutcheon Finish	Signal White, Chrome Plated, Brass Plated
Sprinkler Finish	Natural Brass, Chrome Plated, Signal White
SIN	TY3338, TY3358
Wrench Type	W-Type 7
Tech Data Sheet	TFP520

EC light hazard ■ 3mm and 5mm Glass Bulb ■ Lengths up to 1220 mm (48") ■ Designed for use in light hazard occupancy applications requiring a dry sprinkler to cover areas up to: 4,9 m x 6,1 m (16' x 20') or 5,5 m x 4,9 m (18' x 16') ■ Special assembly provides a seal at the main pipe to prevent water from entering the assembly until the sprinkler operates

DS-1 Stainless Steel

Pendent



K Factor	K=5.6 (80,6)
Thread Size	1" NPT (Standard Order) ISO 7-R1
Approvals	UL, C-UL, LPCB, CE
Temperature	57°C/135°F, 68°C/155°F, 79°C/175°F, 93°C/200°F, 141°C/286°F, 182°C/360°F
Escutcheon Finish	Stainless Steel
Sprinkler Finish	Stainless Steel
SIN	TY3230, TY3250
Wrench Type	W-Type 7
Tech Data Sheet	TFP560

3mm and 5mm Glass Bulb ■ Quick and Standard Response ■ The stainless-steel construction of these sprinklers extends the life of a sprinkler beyond that of traditional copper alloy sprinklers exposed to corrosive atmospheres ■ Wet-pipe, dry-pipe, or preaction installations ■ Designed for use in applications where sprinklers and/or connecting piping may be exposed to freezing conditions, or the sprinkler system is seasonally drained ■ Special assembly provides a seal at the main pipe to prevent water from entering the assembly until the sprinkler operates.

Dry Sprinklers

DS-1 Stainless Steel

Horizontal Sidewall, and Extended Coverage Horizontal Sidewall



K Factor	K=5.6 (80,6)
Thread Size	1" NPT (Standard Order) ISO 7-R1
Approvals	UL, C-UL
Temperature	57°C/135°F, 68°C/155°F, 79°C/175°F, 93°C/200°F, 141°C/286°F, 182°C/360°F
Escutcheon Finish	Stainless Steel
Sprinkler Finish	Stainless Steel
SIN	TY3337, TY3357, TY3339
Wrench Type	W-Type 7
Tech Data Sheet	TFP560

3mm and 5mm Glass Bulb ■ Quick and Standard Response ■ The stainless-steel construction of these sprinklers extends the life of a sprinkler beyond that of traditional copper alloy sprinklers exposed to corrosive atmospheres ■ Wet-pipe, dry-pipe, or preaction installations ■ Extended coverages protecting areas up to 4,9 x 6,1m (16' x 20') ■ Designed for use in applications where sprinklers and/or connecting piping may be exposed to freezing conditions, or the sprinkler system is seasonally drained ■ Special assembly provides a seal at the main pipe to prevent water from entering the assembly until the sprinkler operates.

DS-8

Pendent



K Factor	K=8.0 (80,6)
Thread Size	1" NPT (Standard Order) ISO 7-R1
Approvals	UL, C-UL
Temperature	57°C/135°F, 68°C/155°F, 79°C/175°F, 93°C/200°F, 141°C/286°F, 182°C/360°F
Escutcheon Finish	Signal White Polyester, Chrome Plated, Brass Plated, Stainless Steel
Sprinkler Finish	Natural Brass, Chrome Plated, Signal White Polyester
SIN	Standard Response: TY4255, (photo shown) Quick Response: TY4235
Wrench Type	W-Type 7
Tech Data Sheet	Standard Response: TFP503 Quick Response: TFP513

Standard coverage ■ All hazards (light hazards, horizontal sidewall) ■ 5 mm (SR) or 3mm (QR) bulb ■ Lengths up to 1220 mm (48") ■ Designed for use in applications where sprinklers and/or connecting piping may be exposed to freezing conditions, or the sprinkler system is seasonally drained ■ Special assembly provides a seal at the main pipe to prevent water from entering the assembly until the sprinkler operates ■ Designed for use in applications requiring dry sprinklers, or where building construction or aesthetic considerations make the installation of dry horizontal sidewall sprinklers more desirable than the dry pendent type

Dry Sprinklers

DS-2

Pendent



K Factor	K=11.2 (161,3)
Thread Size	1" NPT (Standard Order) ISO 7-R1
Approvals	UL, C-UL, NYC
Temperature	57°C/135°F, 68°C/155°F, 79°C/175°F, 93°C/200°F, 141°C/286°F
Escutcheon Finish	Signal White, Chrome Plated, Brass Plated
Sprinkler Finish	Natural Brass, Chrome Plated, Signal White
SIN	TY5255, TY5235
Wrench Type	W-Type 17
Tech Data Sheet	TFP530

Standard coverage ■ All hazard (standard response) ■ Light hazard/Ordinary hazard (quick response) ■ 3 mm and 5 mm bulb ■ Extra large orifice ■ Lengths to 1220 mm (48") ■ Designed for use in applications where sprinklers and/or connecting piping may be exposed to freezing conditions, or the sprinkler system is seasonally drained ■ Special assembly provides a seal at the main pipe to prevent water from entering the sprinkler assembly until the sprinkler operates

DS-2

Extended Coverage Pendent



K Factor	K=11.2 (161,3)
Thread Size	1" NPT (Standard Order) ISO 7-R1
Approvals	UL, C-UL, NYC
Temperature	57°C/135°F, 68°C/155°F, 79°C/175°F, 93°C/200°F, 141°C/286°F
Escutcheon Finish	Signal White, Chrome Plated, Brass Plated
Sprinkler Finish	Natural Brass, Chrome Plated, Signal White
SIN	TY5238
Wrench Type	W-Type 17
Tech Data Sheet	TFP540

EC light hazard & ordinary hazard ■ 3 mm bulb ■ Extra large orifice ■ Lengths to 1220 mm (48") ■ Designed for use in applications where sprinklers and/or connecting piping may be exposed to freezing conditions, or the sprinkler system is seasonally drained ■ Special assembly provides a seal at the main pipe to prevent water from entering the assembly until the sprinkler operates

Dry Sprinklers

DS-C

Concealed Pendent



K Factor	K=5.6 (80,6)
Thread Size	1" NPT (Standard Order) ISO 7-R1
Approvals	UL, C-UL, NYC
Temperature	68°C/155°F - Sprinkler, 59°C/139°F - Cover Plate, 93°C/200°F - Sprinkler, 74°C/165°F - Cover Plate
Cover Plate Finish	Grey White, Brass, Pure White, Signal White, Jet Black, Chrome, Custom
SIN	TY3535, TY3555
Wrench Type	RFII
Tech Data Sheet	TFP515

Standard coverage ■ All hazard (standard response) ■ Light hazard/ordinary hazard (quick response) ■ 3 mm and 5 mm bulb ■ Lengths to 1220 mm (48") ■ Designed for use in applications where sprinklers and/or connecting piping may be exposed to freezing conditions, or the sprinkler system is seasonally drained ■ Special assembly provides a seal at the main pipe to prevent water from entering the sprinkler assembly until the sprinkler operates.

DS-ECC

Extended Coverage Concealed Pendent



K Factor	K=5.6 (80,6)
Thread Size	1" NPT (Standard Order) ISO 7-R1
Approvals	UL, C-UL, NYC
Temperature	68°C/155°F - Sprinkler, 59°C/139°F - Cover Plate, 93°C/200°F - Sprinkler, 74°C/165°F - Cover Plate
Cover Plate Finish	Grey White, Brass, Pure White, Signal White, Jet Black, Chrome, Custom
SIN	TY3539
Wrench Type	RFII
Tech Data Sheet	TFP518

EC light hazard/EC ordinary hazard ■ 3 mm bulb ■ Lengths to 1220 mm (48") ■ Designed for use in applications where sprinklers and/or connecting piping may be exposed to freezing conditions, or the sprinkler system is seasonally drained ■ Special assembly provides a seal at the main pipe to prevent water from entering the sprinkler assembly until the sprinkler operates

Dry Sprinklers

DS-3

Extended Coverage Horizontal Sidewall



K Factor	K=11.2 (161,3)
Thread Size	1" NPT (Standard Order) ISO 7-R1
Approvals	UL, C-UL, NYC
Temperature	68°C/155°F, 93°C/200°F
Escutcheon Finish	Signal White, Chrome Plated, Brass Plated
Sprinkler Finish	Natural Brass, Chrome Plated, Signal White
SIN	TY5339
Wrench Type	W-Type 8
Tech Data Sheet	TFP550

EC ordinary hazard ■ 3 mm bulb ■ Lengths to 1220 mm (48") ■ Designed for use in applications where sprinklers and/or connecting piping may be exposed to freezing conditions, or the sprinkler system is seasonally drained ■ Ideal for Exterior Loading Docks and Covered Areas and can eliminate the need for dry or anti-freeze systems.

DSB-2

Dry Sprinkler Boot (For Use With TFP Dry Type Sprinklers)




Includes	1 Boot, 2 Strap Ties, and 1/3 oz. of Adhesive (quantity of adhesive is sufficient for installing 1 Boot)
Tech Data Sheet	TFP591

Helps to close the air gap created by the clearance hole through a wall or ceiling through which the dry type sprinkler has penetrated ■ Helps to stop the air exchange between the inside and outside of the freezer (or any other type of similar construction) to help prevent transfer of moist air into the freezer space

G5

DS-1 Dry Sprinkler Guards

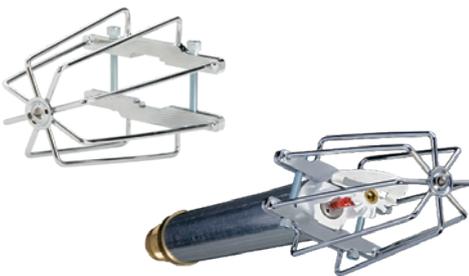

Approvals	UL
Finish	Zinc Chromate
Tech Data Sheet	TFP783

The TYCO Model G5 Sprinkler Guards are designed to be used in areas that make the sprinklers susceptible to mechanical or physical damage ■ For use with Series DS-1 Dry Sprinklers standard, deep and no escutcheons



Special Application Sprinklers

Intended for specific applications such as combustibile concealed spaces and areas subject to corrosion.

- Attic Spaces
- Corrosive Environments
- High Security Institutions
- Window Protection

Special Application Sprinklers

Attic

BB (Back-to-Back), SD (Single Directional), HIP, & AP (Attic Plus)



Back-To-Back



Hip



Single Directional








Attic Plus (AP)

K Factor	K=4.2 (60,5), K=5.6 (80,6), K=8.0 (115,2)
Thread Size	1/2" NPT · 3/4" NPT
Approvals	UL, C-UL
Temperature	93°C/200°F for BB (K4.2 and K8.0), HIP, AP 100°C/212°F for BB (K5.6), SD
Sprinkler Finish	Natural Brass
SIN	TY4180, TY4181, TY4182 TY3180, TY3181, TY3182 TY2180, TY2181, TY2182 TY3183, TY3184, TY3185 TY3187, TY3190, TY2190
Wrench Type	W-TYPE 3, W-TYPE 6, W-TYPE 20
Tech Data Sheet	TFP610

"Specific Application Sprinklers for Protecting Attics" ■ 3 mm bulb or solder type
 ■ Wet or dry pipe systems ■ Provides a tested method of protecting an attic ■
 Provides a specific cost advantage by reducing the amount of piping required
 ■ Cover attics to 60'-0" wide with a single line of piping, eliminating the need
 for as many as five branch lines ■ Saves up to 80% of the piping that would be
 required with standard sprinklers while providing a higher level of protection.

Spray Patterns

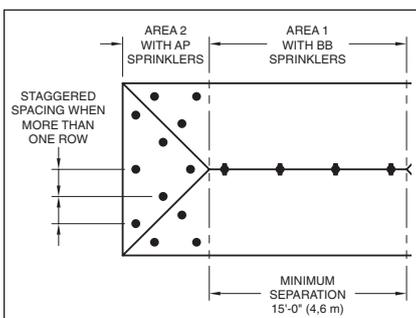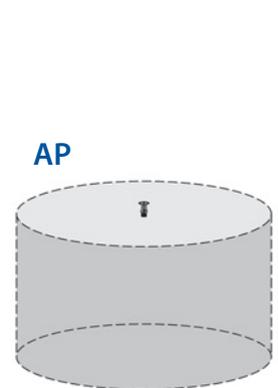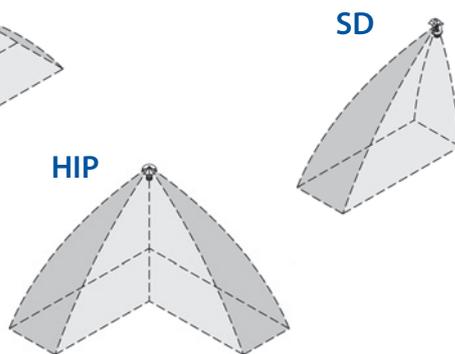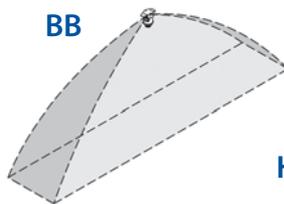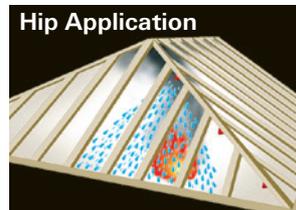

Special Application Sprinklers

RAVEN Studio Sprinkler

Pendent & Horizontal Sidewall Sprinklers



K Factor	K=5.6 (80,6)
Thread Size	1/2" NPT
Approvals	UL, C-UL
Temperature	74°C/165°F
Sprinkler Finish	White, Grey, Custom
Escutcheon Finish	White, Grey, Chrome/Electropolish, Custom, Primed White or Grey (for paint-in-place)
SIN	Standard Coverage: TY1281 - Pendent, TY1381 - HSW Extended Coverage: TY1282 - Pendent, TY1382 - HSW
Wrench Type	W-Type 25
Tech Data Sheet	TFP658

TYCO RAVEN Studio Sprinklers 5.6K Pendent and Horizontal Sidewall (HSW) Quick Response, Standard Coverage for Light and Ordinary Hazard applications and Extended Coverage for Light Hazard applications only, are intended for use in areas as designed per NFPA 13 ■ The flush design is made aesthetically appealing by concealing the deflector and other operating parts behind the link assembly. ■ Additionally, RAVEN Studio is the only sprinkler UL Listed with a paint-in-place escutcheon. Both the sprinkler and escutcheon are also available in a range of factory-painted custom colors.

RAVEN

Institutional Pendent & Horizontal Sidewall



K Factor	K=5.6 (80,6)
Thread Size	1/2" NPT
Approvals	UL, C-UL
Temperature	74°C/165°F
Escutcheon Material	Carbon Steel, or Stainless Steel
Escutcheon Finish	Grey, Chrome, White, or Electropolished (SS only)
Sprinkler Finish	Grey or White
SIN	TY3281, TY3282, TY3381, TY3382
Wrench Type	W-Type 25
Tech Data Sheet	TFP651

Quick Response ■ Standard and Extended Coverage ■ Designed for use in areas such as correctional, detention, and mental health care facilities as well as other commercial buildings ■ Both the pendent and horizontal sidewall styles are available for standard or extended coverage applications ■ Tamper-resistant features ■ 12,1 bar (175 psi).

Special Application Sprinklers

TFP PH2

Institutional Pendent Sprinklers



K Factor	K=5.6 (80,6)
Thread Size	1/2" NPT
Approvals	UL, C-UL, NYC
Temperature	74°C/165°F, 100°C/212°F
Sprinkler Finish	Chrome Plated
Escutcheon Finish	Chrome Plated
SIN	TY3290
Wrench Type	Model 1509-3
Tech Data Sheet	TFP650

The Tyco Model TFP PH2, 5.6 K-factor, Institutional Pendent Sprinklers are standard response standard coverage, fusible solder type spray sprinklers designed for use in areas such as correctional, detention, and mental health care facilities. ■ The unique features of the Model TFP PH2 provide a tamper resistant sprinkler design that helps eliminate the opportunity for individuals to injure themselves or others with the components of a fire sprinkler. ■ At the same time, the Model TFP PH2 optimizes an aesthetically appealing flush design that conceals most of the operating parts.

TFP PH5

Institutional Horizontal Sidewall Sprinklers




K Factor	K=5.6 (80,6)
Thread Size	1/2" NPT
Approvals	UL, C-UL, NYC
Temperature	74°C/165°F
Sprinkler Finish	Chrome Plated
Escutcheon Finish	Chrome Plated
SIN	TY3390
Wrench Type	Model 1509-3
Tech Data Sheet	TFP650

The Tyco Model TFP PH5, 5.6 K-factor, Institutional Horizontal Sidewall Sprinklers are standard-response, standard-coverage spray sprinklers designed for use in areas such as correctional, detention, and mental health care facilities. ■ The unique features of the Model TFP PH5 provide a tamper-resistant sprinkler design that helps eliminate the opportunity for individuals to injure themselves or others with components of a fire sprinkler. ■ The Model TFP PH5 optimizes an aesthetically appealing flush design that conceals most of the operating parts.

Special Application Sprinklers

WS™

Window Sprinklers, Horizontal & Pendent Vertical Sidewall

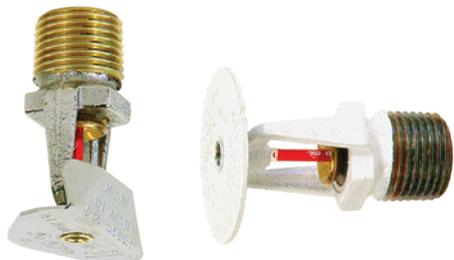

K Factor	K=5.6 (80,6)
Thread Size	1/2" NPT
Approvals	UL, C-UL, NYC, ICC
Temperature	68°C/155°F, 93°C/200°F
Sprinkler Finish	Signal White Polyester, Chrome Plated, Natural Brass, Jet Black
SIN	TY3388, TY3488
Wrench Type	W-Type 20
Tech Data Sheet	TFP620

3 mm bulb ■ Only UL tested sprinklers that can protect glazing in a wall or window and allow it to maintain its mechanical equivalent rating up to two hours ■ First sprinklers to be UL/C-UL Listed, ICC-ES, and ULC Listed & Approved for maintaining a rated assembly ■ Pendent allows installation farther away from the glass than the sidewall ■ Sidewall permits the window mullion to act as a baffle, allowing the sprinklers to be spaced closely together, if necessary ■ Provides the only UL tested option when seeking wall fire ratings when using heat strengthened, tempered, or ceramic glass.

CWS

Specific Application Concealed Pendent Vertical Sidewall Window Sprinkler



K Factor	K=5.6 (80,6)
Thread Size	1/2" NPT
Approvals	UL, C-UL, ICC
Temperature	71°C/160°F - Sprinkler, 59°C/139°F - Cover Plate, 100°C/212°F - Sprinkler, 74°C/165°F - Cover Plate
Cover Plate Finish	Ivory, Bright Chrome, Beige, Pure White, Signal White, Grey White, Brown, Black, Brushed Brass, Brushed Chrome, Custom
SIN	TY3498
Wrench Type	W-Type 39
Tech Data Sheet	TFP621

Designed to provide a two-hour fire-resistance-rating to protect non-rated glazing ■ UL and C-UL Listed as a specific application automatic window sprinkler ■ Compliant with the International Building Code, fire-resistant rating evaluated in ICC ESR-2397 ■ Flat-plate design conceals the sprinkler above the ceiling

Special Application Sprinklers

CC1

Combustible Concealed Space Sprinklers™, Upright



K Factor	K=2.8 (40,3)
Thread Size	1/2" NPT
Approvals	UL
Temperature	79°C/175°F
Sprinkler Finish	Natural Brass
SIN	TY1189
Wrench Type	W-Type 20
Tech Data Sheet	TFP630

3 mm bulb ■ Sprinklers are fast response, specific application sprinklers designed to provide protection of light hazard combustible, as well as non-combustible, concealed spaces ■ Meets NFPA® Requirements for Specialty Listed Sprinklers in Combustible Concealed Spaces ■ Allows the use of BlazeMaster® CPVC pipe with the benefit of superior sprinkler protection for Wood truss spaces.



CC2

Combustible Concealed Space Sprinklers™, Upright



K Factor	K=4.2 (60,5), K=5.6 (80,6)
Thread Size	1/2" NPT
Approvals	UL
Temperature	79°C/175°F
Sprinkler Finish	Natural Brass
SIN	TY2189, TY3189
Wrench Type	W-Type 6
Tech Data Sheet	TFP632

3 mm bulb ■ Specific application sprinklers ■ Provides protection of specific light hazard combustible, as well as non-combustible, concealed spaces requiring sprinkler protection ■ The CC2 Sprinklers comply with the criterion for the protection of combustible concealed spaces as described in NFPA 13 ■ Allows the use of BlazeMaster® CPVC pipe in combustible concealed areas with the benefit of superior sprinkler protection for Wood truss spaces ■ Can be used on steel dry pipe sprinkler systems ■ Increased spacing from 3,1 m (10 ft.) to 3,7 m (12 ft.) ■ Increased coverage area from 9,3 m² (100 ft²) to 13,4 m² (144 ft²)

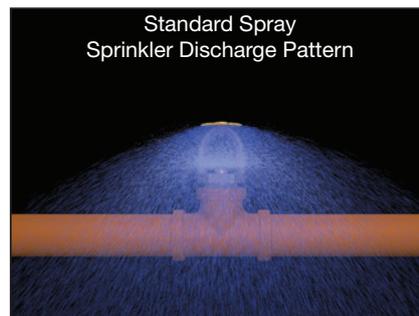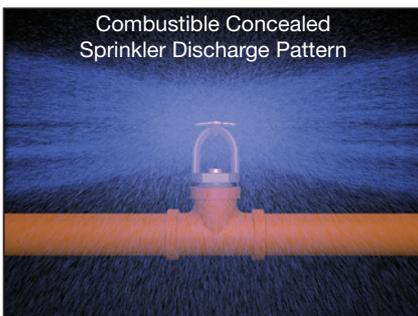

Special Application Sprinklers

CC3

Combustible Concealed Space Sprinklers™, Upright



K Factor	K=4.2 (60,5), K=5.6 (80,6)
Thread Size	1/2" NPT
Approvals	UL
Temperature	93°C/200°F
Sprinkler Finish	Natural Brass
SIN	TY2199 - 4.2K, TY3199 - 5.6K
Wrench Type	W-Type 6
Tech Data Sheet	TFP633

3 mm bulb ■ The CC3 Combustible Concealed Sprinklers are quick response, upright, specific application sprinklers designed to provide protection of specific light hazard combustible, as well as non-combustible, concealed spaces requiring protection ■ The Model CC3 Sprinklers comply with the criteria for the protection of combustible concealed spaces as described in NFPA 13 ■ The Model CC3 are designed for installation on BlazeMaster CPVC wet pipe systems and steel wet pipe or dry pipe sprinkler systems.

Issue D Quartzoid®

High Temperature, Upright & Pendent



K Factor	K=5.6 (80,6), K=8.0 (115,2)
Thread Size	1/2" NPT · 3/4" NPT
Approvals	UL, C-UL, FM, LPCB
Temperature	204°C/400°F, 260°C/500°F, 343°C/650°F (K=5.6 only)
Sprinkler Finish	Natural Brass, Chrome Plated, Lead Coated
SIN	TY3191, TY3296, TY4191, TY4292
Wrench Type	W-Type 11
Tech Data Sheet	TFP690

Standard coverage ■ All hazard ■ 11 mm bulb ■ Extra-high and ultra-high temperature ratings and corrosion resistant coatings ■ Temperature Ratings to 343°C (650°F) available.

Special Application Sprinklers

TY-B

Conventional (Old Style)



K Factor	K=5.6 (80,6) , K=8.0 (115,2)
Thread Size	1/2" NPT • 3/4" NPT
Approvals	UL, C-UL, LPCB, VdS, NYC
Temperature	57°C/135°F, 68°C/155°F, 79°C/175°F, 93°C/200°F, 141°C/286°F, 182°C/360°F, Open
Sprinkler Finish	Natural Brass, Chrome Plated, Pure White, Signal White, Wax Coated, Lead Coated, Wax Over Lead Coated
SIN	TY3651, TY4651
Wrench Type	W-Type 6
Tech Data Sheet	TFP661

Ordinary and Extra High Hazard ■ 5 mm bulb ■ These sprinklers are intended to be installed either pendent or upright, and in either position, they produce a spherical water discharge pattern with approximately 50% of the discharge directed upwards and approximately 50% of the discharge directed downwards. ■ The NFPA permits the use of "Old Style Sprinklers" where special construction features require a unique water distribution.

TY-B

Conventional (Old Style)



K Factor	K=5.6 (80,6)
Thread Size	1/2" NPT
Approvals	UL, VdS, LPCB (TY3650 Only)
Temperature	57°C/135°F, 68°C/155°F, 79°C/175°F, 93°C/200°F, 141°C/286°F, 182°C/360°F
Sprinkler Finish	Natural Brass, Chrome Plated, Pure White, Signal White
SIN	TY365, TY3650
Wrench Type	W-Type 6
Tech Data Sheet	TFP662

Ordinary and Extra High Hazard ■ 5 mm bulb ■ These sprinklers are intended to be installed either pendent or upright, and in either position, they produce a spherical water discharge pattern with approximately 50% of the discharge directed upwards and approximately 50% of the discharge directed downwards.

Special Application Sprinklers

TY-FRB

Conventional (Old Style)



K Factor	K=5.6 (80,6) , K=8.0 (115,2)
Thread Size	1/2" NPT • 3/4" NPT
Approvals	UL, C-UL, LPCB, VdS, NYC
Temperature	57°C/135°F, 68°C/155°F, 79°C/175°F, 93°C/200°F, 141°C/286°F
Sprinkler Finish	Natural Brass, Chrome Plated, Pure White, Signal White, Jet Black
SIN	TY3631, TY4631
Wrench Type	W-Type 6
Tech Data Sheet	TFP666

Ordinary and Extra High Hazard ■ 3 mm bulb ■ These sprinklers are intended to be installed either pendent or upright, and in either position, they produce a spherical water discharge pattern with approximately 50% of the discharge directed upwards and approximately 50% of the discharge directed downwards.

TY-FRB

Conventional (Old Style)



K Factor	K=5.6 (80,6)
Thread Size	1/2" NPT
Approvals	UL, C-UL, VdS, LPCB (TY3630 Only)
Temperature	57°C/135°F, 68°C/155°F, 79°C/175°F, 93°C/200°F, 141°C/286°F
Sprinkler Finish	Natural Brass, Chrome Plated, Pure White, Signal White
SIN	TY363, TY3630
Wrench Type	W-Type 6
Tech Data Sheet	TFP667

Ordinary and Extra High Hazard ■ The TYCO Series TY-FRB, Conventional Sprinklers, are quick response, standard coverage, decorative 3 mm glass bulb type spray sprinklers ■ These sprinklers are intended to be installed either pendent or upright, and in either position, they produce a spherical water discharge pattern with approximately 50% of the discharge directed upwards and approximately 50% of the discharge directed downwards.

Special Application Sprinklers

FTR-1

Fixed Temperature Release



K Factor	K=5.6 (80,6)
Thread Size	1/2" NPT
Approvals	UL, C-UL
Temperature	57°C/135°F, 68°C/155°F, 79°C/175°F, 93°C/200°F
Sprinkler Finish	Natural Brass, White Polyester Coated, Gray Teflon® Coated
SIN	TY3030
Wrench Type	W-Type 6
Tech Data Sheet	TFP1388

3 mm bulb ■ Fixed-temperature, heat detector intended for wet or dry pilot release service ■ Maximum 40 ft. x 40 ft. spacing ■ Can be used for pilot line service, instead of standard sprinklers, to activate deluge and preaction systems equipped with either wet or dry pilot line detection ■ Corrosion resistant assembly option for outdoor applications (Teflon® coated)

TY-L

Pendent



K Factor	K=5.6 (80,6) • K=8.0 (115,2)
Thread Size	1/2" NPT • 3/4" NPT
Approvals	FM, CE
Temperature	74°C/165°F, 100°C/212°F, 138°C/280°F
Escutcheon Style	Style 20 • Style 65
Sprinkler Finish	Stainless Steel
SIN	K=5.6 - TY3280, K=8.0 - TY4280
Wrench Type	W-TYPE 9, W-Type 10 (For recessed escutcheons)
Tech Data Sheet	TFP683

TY-L: solder type, standard response, standard coverage ■ Stainless Steel, rated for corrosion resistance ■ All metal components remove glass parts from facility ■ The properties of these sprinklers are intended to resist corrosion due to cleaning agents used in wash-down procedures required in food production environments ■ Designed for use in light, ordinary and extra-hazard commercial occupancies including food production facilities, factories, refineries and chemical plants.

Special Application Sprinklers

TY-B & TY-FRB (Alternate Materials Of Construction)

Upright & Pendent Sprinklers



K Factor	K=5.6 (80,6) • K=8.0 (115,2)
Thread Size	1/2" NPT • 3/4" NPT
Approvals	UL, C-UL, LPCB, Lloyds
Temperature	57°C/135°F, 68°C/155°F, 79°C/175°F, 93°C/200°F, 141°C/286°F, 182°C/360°F
Escutcheon Style	Style 10 • Style 40
Sprinkler Finish	Stainless Steel, SMO, Titanium
SIN	Refer to Tech Data Sheet for SIN Numbers
Wrench Type	W-TYPE 6, W-Type 7 (For recessed escutcheons)
Tech Data Sheet	TFP680

TY-B: 5 mm diameter heat sensitive glass bulb, standard response ■ TY-FRB: 3 mm diameter heat sensitive glass bulb, quick response ■ Corrosion resistant, standard coverage spray sprinklers designed for use in commercial occupancies where corrosive atmospheres may exist ■ Alternate materials of construction (Stainless Steel, SMO, or Titanium) are utilized to extend the life of a sprinkler beyond that which might be expected of copper alloy sprinklers exposed to corrosive atmospheres, (SMO = stainless-molybdenum alloyed)

Vertical, Horizontal & Recessed Horizontal Sidewall Sprinklers



K Factor	K=5.6 (80,6)
Thread Size	1/2" NPT
Approvals	UL, C-UL, LPCB
Temperature	57°C/135°F, 68°C/155°F, 79°C/175°F, 93°C/200°F, 141°C/286°F, 182°C/360°F
Escutcheon Style	Style 10
Sprinkler Finish	Stainless Steel, SMO, Titanium
SIN	Refer to Tech Data Sheet for SIN Numbers
Wrench Type	W-TYPE 6, W-Type 7 (For recessed escutcheons)
Tech Data Sheet	TFP680

TY-B: 5 mm diameter heat sensitive glass bulb, standard response ■ TY-FRB: 3 mm diameter heat sensitive glass bulb, quick response ■ Corrosion resistant, standard coverage spray sprinklers designed for use in commercial occupancies where corrosive atmospheres may exist ■ Alternate materials of construction (Stainless Steel, SMO, or Titanium) are utilized to extend the life of a sprinkler beyond that which might be expected of copper alloy sprinklers exposed to corrosive atmospheres (SMO = stainless-molybdenum alloyed)

Special Application Sprinklers

TY-B & TY-FRB (Poly-Stainless)

Upright, Pendent & Horizontal Sidewall Sprinklers



K Factor	K=5.6 (80,6) • K=8.0 (115,2)
Thread Size	1/2" NPT • 3/4" NPT
Approvals	UL, C-UL, LPCB, Lloyds
Temperature	57°C/135°F, 68°C/155°F, 79°C/175°F, 93°C/200°F, 141°C/286°F, 182°C/360°F
Escutcheon Style	Style 10 • Style 40
Sprinkler Finish	Poly-Stainless
SIN	Refer to Tech Data Sheet for SIN Numbers
Wrench Type	W-TYPE 6, W-Type 7 (For recessed escutcheons)
Tech Data Sheet	TFP682

TY-B: 5 mm diameter heat sensitive glass bulb, standard response ■ TY-FRB: 3 mm diameter heat sensitive glass bulb, quick response ■ Corrosion resistant, standard coverage spray sprinklers designed for use in commercial occupancies where corrosive atmospheres may exist ■ Corrosive environments can wreak havoc on standard sprinkler heads. The TYCO Poly-Stainless sprinklers are here to maintain the aesthetics of a sprinkler in a wide range of corrosive locations.



Sprinkler Accessories

For use with the sprinklers and nozzles described in this catalog.

- Improve Appearance
- Protection From Damage
- Conceal Clearance Holes
- Onsite Emergency Storage Supply

Sprinkler Accessories

Escutcheon Plates

Recessed Escutcheons and Protective Paint Caps



Thread Size	1/2" NPT - Styles 10, 15, 20, & 50 3/8" NPT - Styles 70 3/4" NPT - Styles 30, & 40
Escutcheon Styles	Styles 10, 15, 20, 30, 40, 50, & 70
Finishes	Pure White, Signal White, Jet Black, Chrome Plated, Brass Plated, Plain
Tech Data Sheet	TFP770

Consists of a mounting plate and closure for finished appearance in ceilings or soffits ■ Intended for use in areas with finished ceilings or walls, and the adjustment provided by these escutcheons reduces the accuracy to which fixed piping to the sprinklers must be cut, while providing a decorative recessed sprinkler installation ■ Primarily designed for use with standard spray, quick response sprinklers and the Designer residential sidewall sprinklers ■ Maximum 1/2" to 3/4" adjustment

Style 65, One-Piece Flat Escutcheon

Style 401, Two-Piece Adjustable Escutcheon



Style 65



Style 401

Thread Size	1/2" NPT · 3/4" NPT
Escutcheon Styles	Styles 65, 401
Finishes	Chrome, Signal White, or Brass
Tech Data Sheet	TFP777

Used to improve the overall appearance of the sprinkler installation by concealing the clearance holes required for wall or ceiling installation ■ Deep, two-piece, adjustable ■ Available for 1/2" and 3/4" NPT

Sprinkler Accessories

Escutcheon Plates

Style 60, Two-Piece Flush Escutcheon



Thread Size	3/4" NPT
Approvals	UL, FM
Escutcheon Styles	Styles 60
Finishes	Chrome, Signal White, or Brass
Tech Data Sheet	TFP778

Used to improve the overall appearance of the sprinkler installation by concealing the clearance holes required for wall or ceiling installation ■ Deep, two-piece, adjustable ■ 3/4" total adjustment

Sprinkler Head Cabinet

3, 6 or 12 Capacity



Thread Size	1/2" NPT · 3/4" NPT · 1" NPT
Tech Data Sheet	TFP785

Provides storage for spare sprinklers and sprinkler wrench ■ Spare sprinklers facilitate the prompt replacement of operated or damaged sprinklers and return of fire protection system to service as soon as possible



Nozzle & Nozzle Accessories

Designed for use in a variety of special hazard application – may be required to provide a properly designed special hazard fire protection system.

- Flammable Liquid Ranks & Operations
- Flammable Liquid Storage
- Offshore Platforms
- Industrial Process Equipment
- Computer Rooms
- Clean Rooms

Nozzles and Accessories

D3

Protectospray Directional Spray Nozzle



K Factor	K=1.2 (17,3) to 7.2 (103,7)
Thread Size	1/2" NPT
Approvals	UL, C-UL, FM
Spray Angles	65°, 80°, 95°, 110°, 125°, 140°, 160°, and 180°
Nozzle Finish	Bronze: Natural Finish, Teflon Coated, Lead Coated, Chrome, or Natural Stainless Steel
Wrench Type	W-Type 11
Tech Data Sheet	TFP802, Blow-off Plugs TFP890

Designed for use in water spray fixed systems for fire protection applications ■ Open orifice type for use in deluge systems ■ Nozzles are external deflector types that discharge a uniformly filled cone of medium velocity water droplets ■ Blow-Off Plugs are available and designed for both indoor or outdoor use.

D3S

Protectospray Directional Spray Nozzle



K Factor	K=1.1 (15,8) to 2.8 (40,3)
Thread Size	1/2" NPT
Approvals	UL, C-UL, FM
Nozzle Finish	Bronze, Stainless Steel
Wrench Type	W-Type 11
Tech Data Sheet	TFP804

The D3S Nozzles that are typically used in non-NFPA installations feature an integral strainer for use when the Authority Having Jurisdiction requires the use of individual strainers ■ The D3S Nozzles are external deflector type nozzles that discharge a uniformly filled cone of medium velocity water droplets.

HV "High Velocity"

Directional Spray Nozzle



K Factor	K=1.6 (23,0) · K=1.8 (25,9) · K=2.8 (40,3) · K=4.6 (66,2) K=5.5 (79,2) · K=6.4 (92,2)
Thread Size	1" NPT 1-1/4" (only K=6.4)
Approvals	UL, C-UL, FM
Nozzle Finish	Natural Brass or Stainless Steel
Wrench Type	Common Adjustable Wrench
Tech Data Sheet	TFP815

Open, directional spray nozzles ■ Designed for use in fixed water spray fire protection systems where a high velocity water application is needed, such as the protection of flammable liquids, electrical transformers, circuit breakers, oil-fired boilers and lube oil systems ■ Available in six different orifice sizes and six angle spray patterns ■ Produces a solid conical spray pattern

Nozzles and Accessories

EA-1

Automatic Protectospray Directional Spray Nozzle



K Factor	K=1.4 (20,2), K=2.8 (40,3), K=5.6 (80,6)
Thread Size	1/2" NPT
Approvals	UL, C-UL, FM
Temperature	57°C/135°F, 79°C/175°F, 121°C/250°F, 163°C/325°F, 204°C/400°F, 260°C/500°F
Spray Angles	65°, 80°, 95°, 110°, 125°, 140°, 160°, and 180°
Sprinkler Finish	Natural Finish Bronze, Lead Coated Bronze, Chrome Plated, Wax Coated Bronze
Wrench Type	W-TYPE 11
Tech Data Sheet	TFP800

Medium velocity, Bulb type frangible element for use in closed head systems ■ Discharges a filled cone of water droplets at relatively low velocity ■ The Type EA-1 Nozzles are also especially effective for area coverage and are sometimes used in lieu of standard sprinklers where directional spray is considered more appropriate.

TN-25

Horizontal Spray Nozzle, Open




K Factor	K=25.2 (362,9)
Thread Size	1" NPT or ISO 7-R 1
Approvals	UL, C-UL
Nozzle Finish	Natural Brass
Wrench Type	W-Type 1
Tech Data Sheet	TFP850

The TYCO Model TN-25 Horizontal Spray Nozzle is a specialized open nozzle for use in tunnel fire protection deluge systems, providing an improved alternative to traditional designs ■ Model TN-25 Nozzle allows for a single pipe to run the length of a tunnel, compared to traditional designs that use multiple pipes in order to provide sufficient coverage.

Nozzles and Accessories

TN-17

Horizontal Spray Nozzle, Open

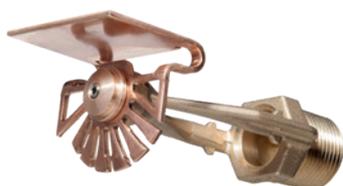

K Factor	K=16.8 (241,9)
Thread Size	3/4" NPT or ISO 7-R 3/4
Approvals	UL, C-UL
Nozzle Finish	Natural Brass
Wrench Type	W-Type 21
Tech Data Sheet	TFP852

The TYCO Model TN-17 Horizontal Spray Nozzle having a 16.8 (K240) K-factor is a specialized open nozzle for use in tunnel fire protection deluge systems, providing an improved alternative to traditional designs ■ With its ability to provide extended coverage, the Model TN-17 Nozzle allows for a single pipe to run the length of a tunnel, compared to traditional designs that use multiple pipes in order to provide sufficient coverage ■ The Model TN-17 Nozzle is an open nozzle designed to be integrated into a deluge fire protection system.

D4a

Directional Spray Nozzles, Open, Medium Velocity



K Factor	K=1.2 (17,3) • K=1.8 (25,9) • K=2.3 (33,1) • K=3.0 (43,2) K=4.1 (59,0) • K=5.6 (80,6) • K=7.2 (103,7)
Thread Size	1/2" NPT
Approvals	UL, C-UL
Spray Angles	65°, 80°, 95°, 110°, 125°, 140°, 160°, and 180°
Nozzle Finish	Natural Finish Bronze, Teflon Coated Bronze
Wrench Type	Common Adjustable Wrench
Tech Data Sheet	TFP806

Nozzles are external deflector types that discharge a uniformly filled cone of medium velocity water droplets ■ The Type D4a Nozzles feature a four arm body design that helps assist against mechanical or physical damage ■ Open orifice design type for use in deluge systems

Nozzles and Accessories

F822 thru F834 Mulsifyre®

Directional Spray Nozzles, Open, High Velocity



K Factor	K=2.0 (28,8) • K=2.3 (33,1) • K=2.7 (38,9) K=2.6 (37,4) • K=4.6 (66,2) • K=5.1 (73,4)
Thread Size	3/4" NPT
Approvals	UL, ULC
Nozzle Finish	Brass
Wrench Type	Common Adjustable Wrench
Tech Data Sheet	TFP810

Two configurations: basic Mulsifyre Nozzle & Mulsifyre Nozzle with Model F880 Dust Cap, ■ Available in six different models provide a wide range of orifice sizes and water distribution characteristics ■ Air aspirating foam-water nozzles, for use with all types of foam (required for Non-AFFF type foams) ■ Designed for use in water spray fixed systems for fire protection applications where a high velocity water application may be required, Pendent & upright designs, Open nozzle for use on deluge systems.

F822S thru F834S Mulsifyre®

Directional Spray Nozzles, Open, With Strainers, High Velocity



K Factor	K=2.0 (28,8) • K=2.3 (33,1) • K=2.7 (38,9) K=2.6 (37,4) • K=4.6 (66,2) • K=5.1 (73,4)
Thread Size	3/4" NPT
Approvals	FM
Nozzle Finish	Brass
Wrench Type	Common Adjustable Wrench
Tech Data Sheet	TFP811

Two configurations: basic Mulsifyre Nozzle & Mulsifyre Nozzle with Model F880 Dust Cap, ■ Available in six different models provide a wide range of orifice sizes and water distribution characteristics ■ Air aspirating foam-water nozzles, for use with all types of foam (required for Non-AFFF type foams) ■ Designed for use in water spray fixed systems for fire protection applications where a high velocity water application may be required, Pendent & upright designs, Open nozzle for use on deluge systems.

B-1

Upright & Pendent Foam-Water Sprinkler



K Factor	K=3.0 (43,2)
Thread Size	1/2" NPT
Approvals	UL, C-UL, Military
Nozzle Finish	Natural Bronze
Wrench Type	Common Adjustable Wrench
Tech Data Sheet	TFP840

Air aspirating foam-water nozzles ■ Pendent & upright styles ■ Open nozzle for use in NFPA 16 foam-water sprinkler systems

Nozzles and Accessories

Cooling Tower Nozzle

Type 1 and 2




K Factor	K=2.9 (42,0)
Thread Size	3/4" NPT
Approvals	UL, FM
Nozzle Finish	Bronze or Stainless Steel
Wrench Type	W-Type 11
Tech Data Sheet	TFP830

Intended for use in fire protection systems for cross flow cooling towers with combustible fill sections ■ Open nozzle design for use in water spray deluge system ■ Installed under the distribution basin, they discharge water in a relatively narrow, elongated spray pattern ■ Type 1 has a waterway designed for use in towers with diffusion decks, Type 2 for those without diffusion decks

FH-1

Flexible Hose

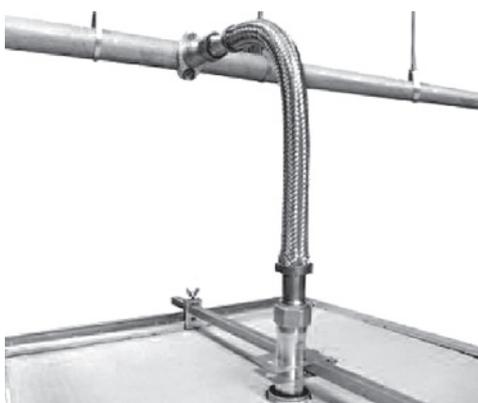

Nominal Assembly Lengths	700mm, 1000mm, 1200mm, 1500mm, 1800mm
Inlet Connections	ISO 7-R 1
Outlet Connections	1/2" NPT, 3/4" NPT
Approvals	UL Listed & FM Approved
Bending Angles	Up to 180 degrees
Maximum Ambient Temperature	107°C (225°F)
Maximum Service Pressure	Unbraided - 12,1 bar (175psi) Braided - 13,8 bar (200psi)
Tech Data Sheet	TFP725

TYCO Model FH-1 Flexible Hose can be used in wet sprinkler systems between the branchline and sprinkler when installed in accordance with NFPA 13, 13D, and 13R. ■ Using Model FH-1 Flexible Hose saves time and cost because the system can be installed in false ceilings without cutting and threading pipes associated with installing a drop, arm-over, and elbows. ■ Model FH-1 Flexible Hose is installed quickly without large and expensive tools. ■ Ideal applications include offices, schools, libraries, hospitals, and shopping complexes.

Nozzles and Accessories

Type DN-5

Corrosion Resistant Duct Nozzle, Open, Medium Velocity



K Factor	K=6.0 (86,5)
Thread Size	1/2" NPT
Approvals	FM
Nozzle Coating	HALAR (ECTFE)
Tech Data Sheet	TFP808

The TYCO Type DN-5 Corrosion Resistant Duct Nozzle is an open (non-automatic) directional spray nozzle designed for use in water spray fixed systems for fire protection applications in extremely corrosive duct environments. ■ It is an external deflector type nozzle that discharges medium velocity water droplets. ■ The Type DN-5 Corrosion Resistant Duct Nozzle is effective in discharging water to vertical, horizontal, curved, and irregular shaped surfaces within a duct to achieve fire suppression and potential extinguishment.

DDS Duct Deluge System

For The Protection of Ventilation Ductwork Handling Corrosive Gases



Approvals	FM
Corrosive Environments	<ul style="list-style-type: none"> - Steel Manufacturing, - Copper Mineral Processing, - Lead Mineral Processing, - Zinc Mineral Processing, - Coal Power Generation, - Semiconductor Fabrication, - Pulp & Paper Facilities
Tech Data Sheet	TFP870

The TYCO DDS Duct Deluge System is designed specifically for the protection of ventilation ductwork handling corrosive gases, including extremely corrosive gases as defined in FM Property Loss Prevention Data Sheet 7-78. ■ The DDS System features the TYCO DN-5 Corrosion Resistant Duct Nozzle, which is an open (non automatic) directional spray nozzle, and also includes the TYCO Red-E Cabinet, Protectowire linear heat detection, and FlexHead duct mounting hardware. ■ Ventilation ductwork handling extremely corrosive environments in industrial settings.




Wet Pipe Sprinkler Systems

Designed for use in wet pipe sprinkler systems.

- Heated Warehouses
- Factories
- Hospitals
- Shopping Centers
- Apartment or Condominium Complexes
- Single Family Residences

Wet System Valves & Devices

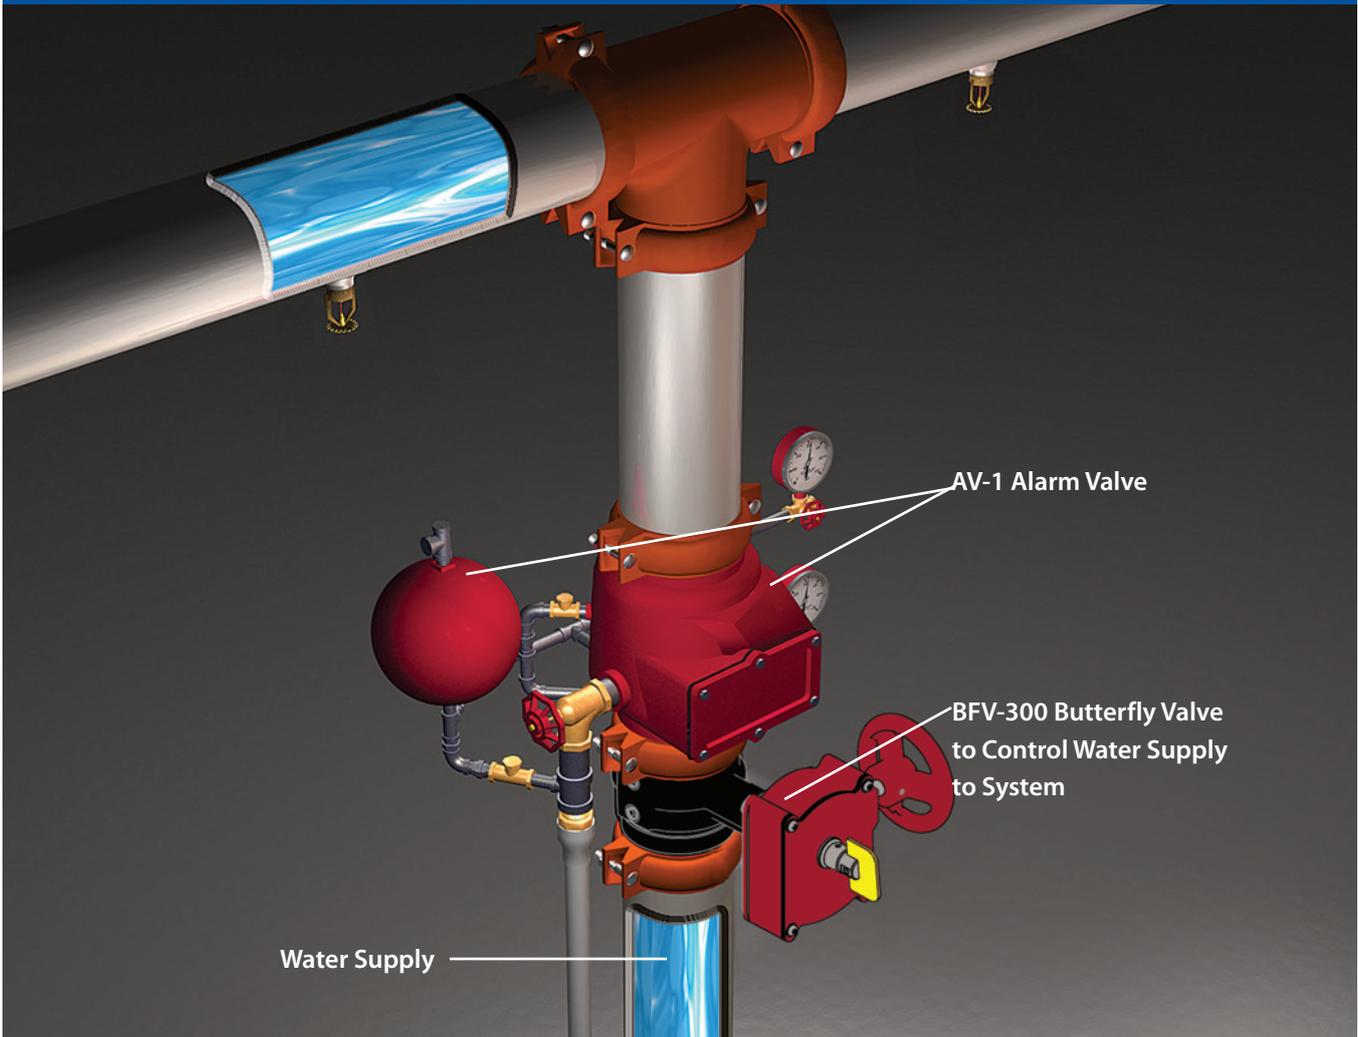

AV-1-300

Alarm Valve



Size Range	DN65 thru DN200 (2½" thru 8")
Approvals	UL, C-UL Listed & FM Approved
Working Water Pressure	1,4 to 20,7 bar (20 to 300 psi)
System	For use in wet pipe (automatic sprinkler) fire protection systems
End Connection	Groove x Groove, Flange x Flange, Flange x Groove
Flange Drilling	ANSI, ISO, AS, & JIS
Tech Data Sheet	TFP910

AV-1 Alarm Valves may be installed vertically or horizontally ■ Alarm Valves are divided seat ring, rubber-faced clapper, check type, water flow alarm valves ■ Automatically actuates electrically and/or hydraulically operated alarms when there is a steady flow equivalent to the discharge rate for one or more sprinklers ■ Optional Retard Chamber used in installations subject to variable pressure (generally associated with public water supplies) to help prevent false alarms ■ Available pre-assembled with modular trim to provide a quick and convenient method for trimming valve risers. Contact TFP for details

Wet System Valves & Devices

RC-1

Retard Chamber



Approvals	UL, ULC, & FM for use with: Model AV-1-300 Alarm Check Valves UL, ULC, FM, VdS, & LPCB for use with the following Alarm Check Valves: Model AV-1-175, Gem Model F20/F200/F2001, Gem Model A, Star Model S30/S300/S3001
Maximum Working Pressure	20,7 bar (300 psi)
System	Use in a wet type automatic sprinkler system riser
Tech Data Sheet	TFP920

The Model RC-1 Retard Chamber is required in installations that will be subject to pressure variations, as are generally associated with public water supplies, in order to help prevent false alarms

CV-1FR

Riser Check Valve



Size Range	DN50 thru DN300 (2" thru 12")
Approvals	UL, C-UL Listed & FM Approved
Maximum Working Pressure	20,7 bar (300 psi)
System	Use in a wet type automatic sprinkler system riser
End Connection	Groove x Groove
Tech Data Sheet	TFP950

Can be installed using GRINNELL Grooved Couplings or GRINNELL Figure 71 Flange Adapters ■ Designed with a removable cover for ease of field maintenance ■ Standard seal is grade "E" EPDM

RM-1

Riser Manifolds



Size Range	NFPA 13 - DN40 thru DN150 (1-1/2" thru 6") NFPA 13D - DN25 (1") NFPA 13R - DN40 thru DN50 (1-1/2" thru 2")
Approvals	UL, C-UL Listed & FM Approved Listed by California State Fire Marshall
Maximum Working Pressure	20,7 bar (300 psi)
System	Use in commercial or residential sprinkler systems
End Connection	Thread x Thread, Groove x Groove
Tech Data Sheet	TFP963

Riser Manifolds may be installed either horizontally or vertically orientation, for both single sprinkler rises and floor control in high-rises. ■ Optional Pressure Relief Kits feature a 12,1 bar (175 psi) pressure relief valve and trim components for convenient integration into commercial and residential riser manifold assemblies.

Wet System Valves & Devices

RM-2

Riser Manifolds



Size Range	DN50 thru DN150 (2" thru 6")
Approvals	UL, C-UL Listed & FM Approved Listed by California State Fire Marshall
Maximum Working Pressure	20,7 bar (300 psi)
System	For use in commercial sprinkler systems
Test Orifice	DN50 to DN80 (2" to 3") Manifolds: 2.8K DN100 to DN150 (4" to 6") Manifolds: 4.2K
End Connection	Groove x Groove
Tech Data Sheet	TFP964

The TYCO Model RM-2 Riser Manifold features the necessary waterflow alarm, pressure gauge, alarm test orifice, drain, sight glass and check valve equipment in a single assembly for use in National Fire Protection Association (NFPA) standard NFPA 13 compliant commercial sprinkler systems. ■ The riser manifold provides a cost effective and easy transition arrangement to control valves and system piping. ■ The riser manifold may be installed in either a horizontal or vertical orientation, for both single sprinkler rises and floor control in high-rises.

TD-2

Test & Drain Valve



Test Orifice	DN50 to DN80 (2" to 3") Manifolds: 2.8K DN100 to DN150 (4" to 6") Manifolds: 4.2K
Approvals	UL, C-UL Listed & FM Approved Listed by California State Fire Marshall
Maximum Service Pressure	20,7 bar (300 psi)
Shut-Off Valve	Linear stem actuation with EPDM rubber seals
End Connection	Thread x Thread
Tech Data Sheet	TFP965

The TYCO Model TD-2 Test and Drain Valve with integral pressure relief provides a simplified means for testing of waterflow alarm devices and draining of feed mains. ■ The valve is typically utilized for connection to a common inside drain where it is not practical to terminate an inspector's test connection outside of a building. ■ Linear shut-off eliminates leakage due to debris in media ■ Integral pressure relief ■ Self-cleaning sight glass provides positive indication of flow

Wet System Valves & Devices

RSV-1

Residential Shutoff Valve



Size Range	NFPA 13D - DN25 (1") NFPA 13R or NFPA 12D - DN50 (2")
Approvals	UL, C-UL, & NSF-61
Maximum Working Pressure	12,1 bar (175 psi)
System	For use in residential sprinkler systems
End Connection	Thread x Thread
Tech Data Sheet	TFP980

During the design of a residential sprinkler system, domestic water use should be taken into consideration unless the domestic supply can be stopped when a sprinkler operates ■ When a sprinkler operates, water supply is automatically diverted from the domestic system to the sprinkler system ■ Eliminates the need for pumps, pressurized storage tanks, or electrically operated domestic shutoff valves ■ Valve automatically resets after the fire protection system is returned to normal service

Resi-Riser

Residential



Size Range	DN25 thru DN50 (1" thru 2")
Maximum Working Pressure	12,1 bar (175 psi)
System	For use in residential sprinkler systems
End Connection	Thread x Thread
Tech Data Sheet	Contact Tyco for details

Compact, pre-assembled, ready to install sprinkler riser ■ Brass construction for use in potable water supply ■ Integral test and drain assembly, flow switch with retard mechanism, 20,7 bar (300 psi) gauge, and check valve ■ Compact size allows for easy installation between 50-100 mm (2" x 4") studs ■ Molded mounting points allow for fast and easy left or right hand installation ■ Available with or without pressure relief valve or flow switch retard mechanism features

WMA-1

Water Motor Alarm



Size Range	NFPA 13D - DN25 (1") NFPA 13R or NFPA 12D - DN50 (2")
Approvals	UL, ULC Listed & FM, VdS, & LPCB Approved
Maximum Working Pressure	20,7 bar (300 psi)
System	For use in a wet type automatic sprinkler system riser
Tech Data Sheet	TFP921

Hydraulically operated outdoor alarm for use with appropriate fire protection system valves (alarm, dry, deluge) ■ Supplied by dedicated outlet in valve trim line or retard chamber ■ Uses energy-efficient lightweight impeller design capable of producing very high sound level ■ Corrosion-resistant aluminum alloy gong, gong-mount, and water motor housing ■ Furnished with approved 20mm (3/4") Y-strainer for use in alarm line




Dry Pipe Sprinkler Systems

Designed for use in dry pipe sprinkler systems where piping and sprinklers are subjected to freezing temperatures.

- Unheated Warehouses
- Attic Spaces
- Parking Garages
- Loading Docks
- Store Windows

Dry System Valves & Devices

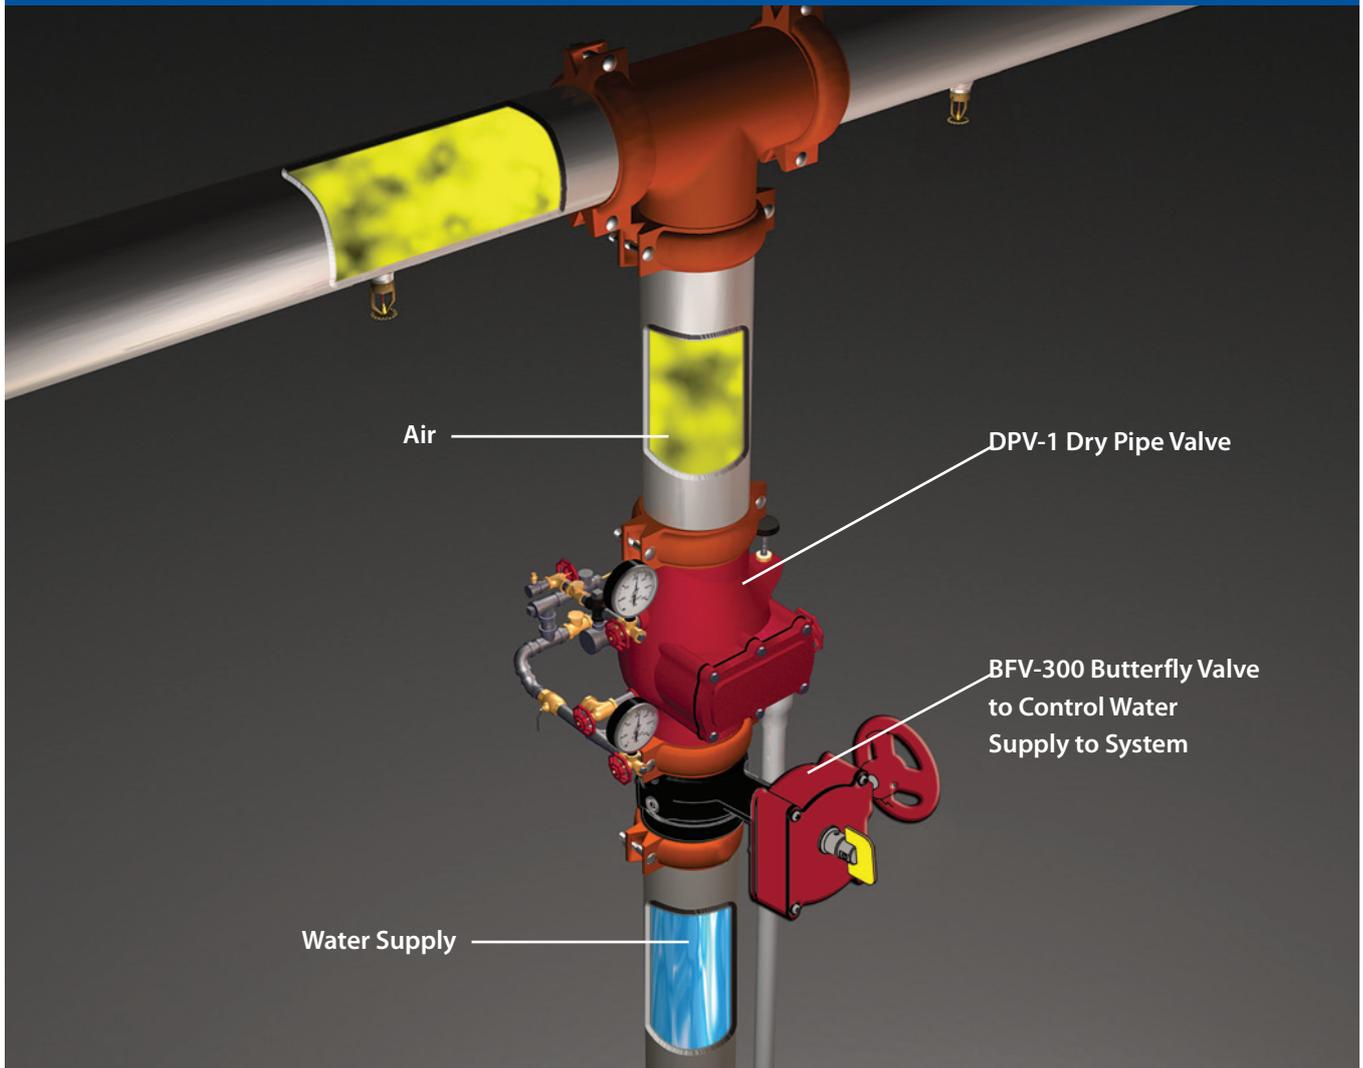

DPV-1

Dry Pipe Valve



Size Range	DN65 thru DN150 (2-1/2" thru 6")
Approvals	UL, C-UL Listed & FM Approved
Maximum Service Pressure	17,2 bar (250 psi)
System	For use in dry pipe fire protection systems
End Connection	Groove x Groove, Flange x Flange, Flange x Groove
Flange Drilling	ANSI, ISO, AS, & JIS
Tech Data Sheet	TFP1020

External reset differential dry pipe valves ■ Unique offset single clapper design enabling a simple compact valve to minimize installation labor ■ Used to supply sprinkler installations in which sprinklers are subjected to freezing conditions (4°C / 40°F or less) ■ Ductile iron construction to ensure a lightweight valve to minimize shipping cost. ■ Compact, Pre-Trimmed, and Semi-Assembled, easy to operate valve trim. ■ Simple reset procedure through the elimination of priming water.

Dry System Valves & Devices

ACC-1

Dry Pipe Valve Accelerator



Approvals	UL, C-UL Listed & FM, LPCB Approved
Maximum Working Air Pressure	4,8 bar (70 psi)
System	For use in dry pipe fire protection systems
End Connection	Threaded
Tech Data Sheet	TFP1112

Model ACC-1 Accelerator reduces the time for valve operation following the operation of one or more automatic sprinklers. ■ Automatically adjusts to small or slow changes in system pressure but trips upon a rapid and steady drop in pressure ■ Designed to trip when system air pressure drops at a rate exceeding approximately 0.07 bar/min (1 psi/minute) ■ Upon tripping, it transmits system air pressure to the intermediate chamber of the dry pipe valve, which neutralizes the differential pressure holding the valve closed and opens the waterway clapper ■ Rated for use at a maximum water supply pressure of 17,2 bar (250 psi) and a maximum system air (or nitrogen) pressure of 4,8 bar (70 psi)

QRS

Electronic Accelerator



Approvals	UL Listed & FM Approved
Maximum Working Air Pressure	4,8 bar (70 psi)
System	For use in dry pipe fire protection systems
End Connection	Threaded
Tech Data Sheet	TFP1100

Quick opening device intended to reduce the time for dry pipe valve operation following the operation of one or more automatic sprinklers. ■ Automatically adjusts to both small and slow changes in system pressure, but trips with a steady drop in pressure (as in the case of sprinkler operation) ■ Can be used to retro-fit existing mechanical accelerators ■ Fully assembled package includes switch, solenoid, control panel, and accelerator trim pipe and fittings ■ Built-in low and high pressure alarm supervision ■ Proven electronic release technology as used for electrically operated deluge and preaction systems ■ Battery back-up in the event of primary power failure ■ Eliminates re-setting problems often incurred with traditional mechanical accelerators

VIZOR

Electronic Dry Pipe Accelerator



Approvals	UL, C-UL Listed & FM Approved
Max. Water Pressure	20,7 bar (300 psi)
Air Pressure	0,7 bar (10 psi) to 4,5 bar (65 psi)
System	For use in dry pipe fire protection systems
End Connection	Threaded
Tech Data Sheet	TFP1105

Direct mounting to the riser ■ Installation consistent with the installation of mechanical devices ■ Easy test-and-reset function, as compared to mechanical accelerators ■ Battery back-up in the event of primary power failure ■ Electronically self-supervising technology, similar to that used in typical alarm panels for alarm and detection systems ■ Built-in low-pressure and high pressure alarm supervision

Dry System Valves & Devices

AMD-1

Air Maintenance Device, Pressure Reducing Type



Approvals	UL, C-UL Listed & FM Approved & NYC Approved under MEA 206-02-E
Field-Adjustable Outlet Pressure Range	0,4 to 4,8 bar (5 to 70 psi)
Maximum Inlet Air Supply Pressure	13,8 bar (200 psi)
System	For use in dry pipe fire protection systems
Tech Data Sheet	TFP1221

Field adjustable ■ Used in systems where compressed air source is available ■ Used in systems in which the air supply is at a higher pressure than is desired for a sprinkler system or dry pilot line system

AMD-2

Air Maintenance Device, Compressor Control Type



Approvals	UL, C-UL Listed & FM Approved & NYC Approved under MEA 206-02-E
Field-Adjustable Pressures	Minimum Cut-In (On) 1,0 bar (14 psi) Maximum Cut-Out (Off) 4,1 bar (60 psi)
NEMA Rating	The housing of the Pressure Switch meets NEMA 1 requirements.
System	For use in dry pipe fire protection systems
Tech Data Sheet	TFP1231

Field adjustable ■ Used in conjunction with a small, non-tank-mounted air compressor ■ Monitors sprinkler system or dry pilot line detection for deluge system air pressure and automatically cycles the compressor to maintain system pressure within preset limits


AMD-3

Nitrogen Maintenance Device, High Pressure (Cylinder) Reducing Type



Approvals	UL, C-UL Listed & FM Approved & NYC Approved under MEA 206-02-E
Field-Adjustable Outlet Pressures Range	0,4 to 4,1 bar (4 to 60 psi)
Maximum Inlet Nitrogen Supply Pressure	200 bar (3000 psi)
System	For use in dry pipe fire protection systems
Tech Data Sheet	TFP1241

Field adjustable ■ Used in conjunction with a cylinder of high pressure nitrogen to control the nitrogen pressure in a sprinkler system or a dry pilot line detection for deluge systems

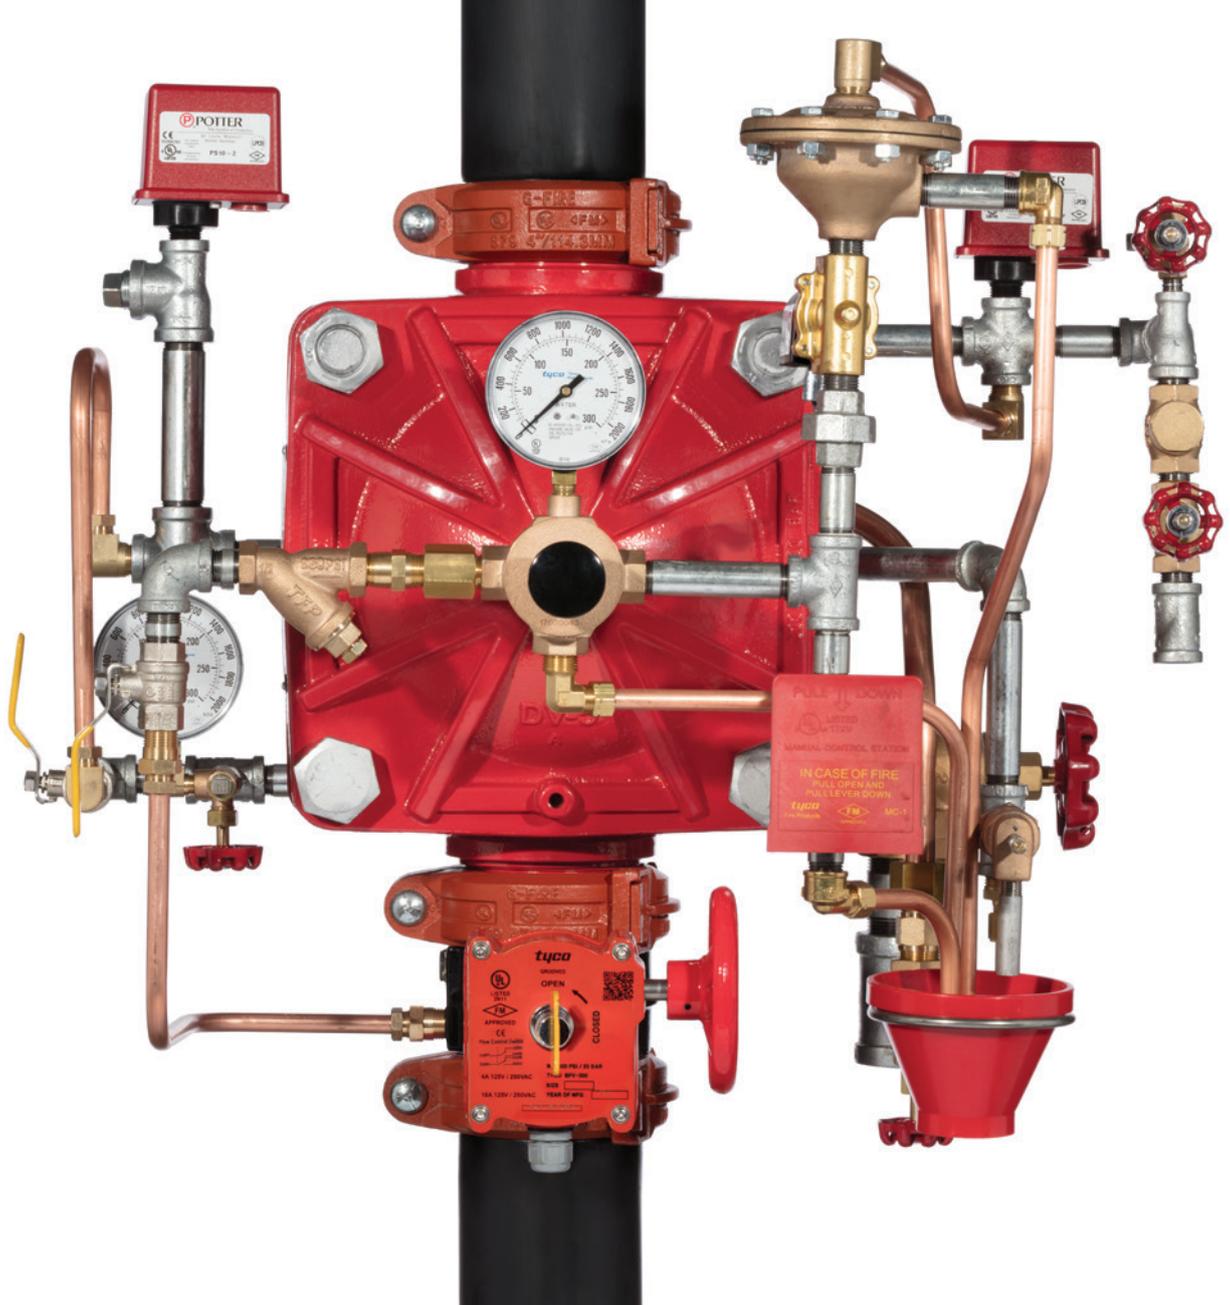

Deluge & Preaction Systems

For use in deluge and preaction fire sprinkler systems.

- Aircraft Hangars
- Refrigerated Areas
- Flammable Liquid Handling
- High-Hazard Installations Using Water as Extinguishing Agent
- Archives
- Libraries

Deluge & Preaction Systems

DV-5A

Deluge Valve, External Resetting Diaphragm Style – DN40 thru DN200 (1½" thru 8")

The TYCO DV-5A Automatic Water Control Valves are diaphragm type valves that can be used in deluge fire protection systems. When properly trimmed, the double seat design of the DV-5A Valve also provides actuation of fire alarms upon system operation.

The diaphragm style design of the DV-5A Valve allows external resetting, providing for easy resetting of a deluge system without having to open a valve handhole cover to manually reposition a clapper and/or latch mechanism. Simply re-pressurizing the diaphragm chamber resets the valve.

The DV-5A features internal and external coating of the valve to provide corrosion resistance. The external corrosion resistance of the epoxy coating permits the use of the DV-5A in corrosive atmospheres associated with many types of industrial processing plants and outdoor installations.



Size Range	DN40 thru DN200 (1½" thru 8")
Approvals	UL, C-UL Listed & FM, VdS & LPCB Approved
Maximum Service Pressure	1,4 bar (20 psi) to 20,7 bar (300 psi)
Types of System	<p>Deluge Systems: (TFP1306 & TFP1325)</p> <ul style="list-style-type: none"> - Wet Pilot Actuation - Dry Pilot Actuation - Electric Actuation <p>Single Interlock Preaction Systems: (TFP1425)</p> <ul style="list-style-type: none"> - Wet Pilot Actuation - Dry Pilot Actuation - Electric Actuation <p>Double Interlock Preaction Systems: (TFP1450)</p> <ul style="list-style-type: none"> - Electric/Pneumatic Actuation - Electric/Electric Actuation
End Connection	Thread x Thread, Groove x Groove, Flange x Flange, Flange x Groove
Flange Drilling	ANSI, ISO, AS, & JIS
Tech Data Sheet	TFP1306


Vertical installation ■ One internal working part, Diaphragm operation ■ No linkage or clapper assembly ■ Light weight ductile iron body ■ Available with deluge and single & double interlock preaction trim ■ Internally & externally coated ■ Features external resetting ■ For deluge, preaction & foam systems

Deluge & Preaction Systems

Deluge Systems

Wet Pilot, Dry Pilot, or Electric Actuation, Remote Resetting, or Remote Resetting Pressure Reducing

Deluge fire protection systems are normally used in special hazard installations where an entire area application of water or foam is required for protection. Applications may include flammable liquid handling and storage areas, aircraft hangars, and other high-hazard installations where water is the most effective extinguishing agent. Deluge systems employ open sprinklers or spray nozzles attached to a piping system. The system is connected to a water supply through the deluge valve. This valve is opened by the operation of a fire detection system installed in the same areas as the open sprinklers or nozzles. Deluge systems may be activated by wet or dry pilot sprinklers, or electric detectors. When the deluge valve opens, water flows into the piping system and discharges from all open sprinklers and nozzles.

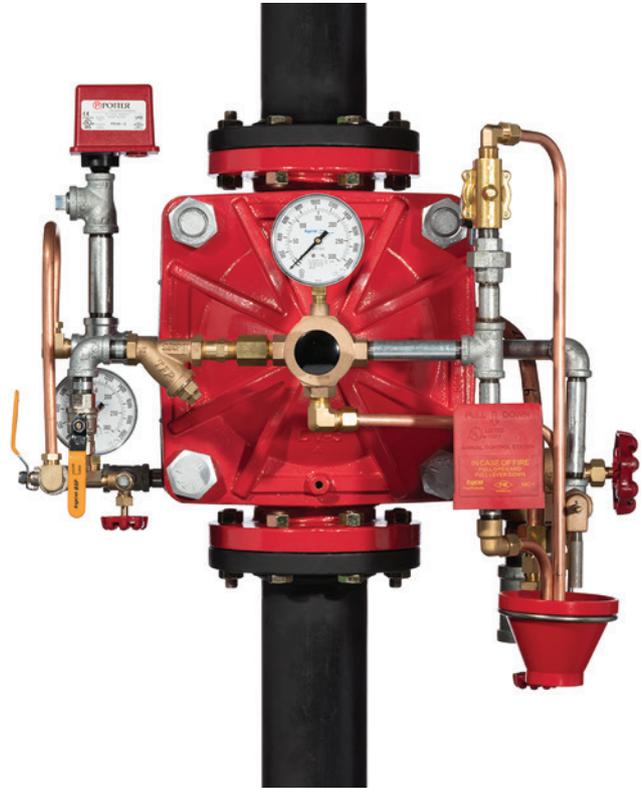

(Electric Actuation Trim Shown)



(Remote Resetting Trim Shown)

DV-5A Size Range	DN40 thru DN200 (1½" thru 8")
Approvals	UL, C-UL Listed & FM, VdS & LPCB Approved
Maximum Service Pressure	Wet Pilot Actuation: 20,7 bar (300 psi) Dry Pilot Actuation: 17,2 bar (250 psi) Electric Actuation: Per Solenoid, see TFP2180
End Connection	Thread x Thread, Groove x Groove, Flange x Flange, Flange x Groove
Flange Drilling	ANSI, ISO, AS, & JIS
Tech Data Sheet	TFP1306 - DV-5A TFP1325 - DV-5A Remote Resetting TFP1326 - DV-5A Remote Resetting, Pressure Reducing

Vertical installation ■ One internal working part, Diaphragm operation ■ No linkage or clapper assembly ■ Light weight ductile iron body ■ Available with deluge and single & double interlock preaction trim ■ Internally & externally coated ■ Features external resetting ■ For deluge, preaction & foam systems


Deluge & Preaction Systems

Single Interlock Preaction Systems

Wet Pilot, Dry Pilot, or Electric Actuation

The DV-5A Supervised single interlock preaction systems are used to protect areas where there is danger of serious water damage that might result from damaged automatic sprinklers or piping. Typically, such areas include computer rooms, storage areas for valuable artifacts, libraries and archives. Also, preaction systems are effectively used to protect properties where a prealarm of a possible fire condition may allow time for fire extinguishment by alternate suppression means, prior to a sprinkler discharge. In the event the fire cannot be extinguished, the preaction sprinkler system will then perform as the primary fire protection system.

Single interlock preaction systems employ automatic sprinklers attached to a piping system containing 10 psi (0,7 bar) supervisory pressure, with a supplemental electric fire detection system installed in the same area as the sprinklers. Preaction systems with 10 psi (0,7 bar) supervisory pressure may also be activated by either wet or dry pilot sprinklers instead of electric detectors. Actuation of the fire detection system from a fire opens the deluge valve, allowing water to flow into the sprinkler piping system and to be discharged only from those sprinklers that have been operated by heat over the fire. Loss of supervisory pressure from the system piping as a result of damaged sprinklers or broken piping will activate a trouble alarm to indicate impairment of the system. The deluge valve will not open due to loss of supervisory pressure.

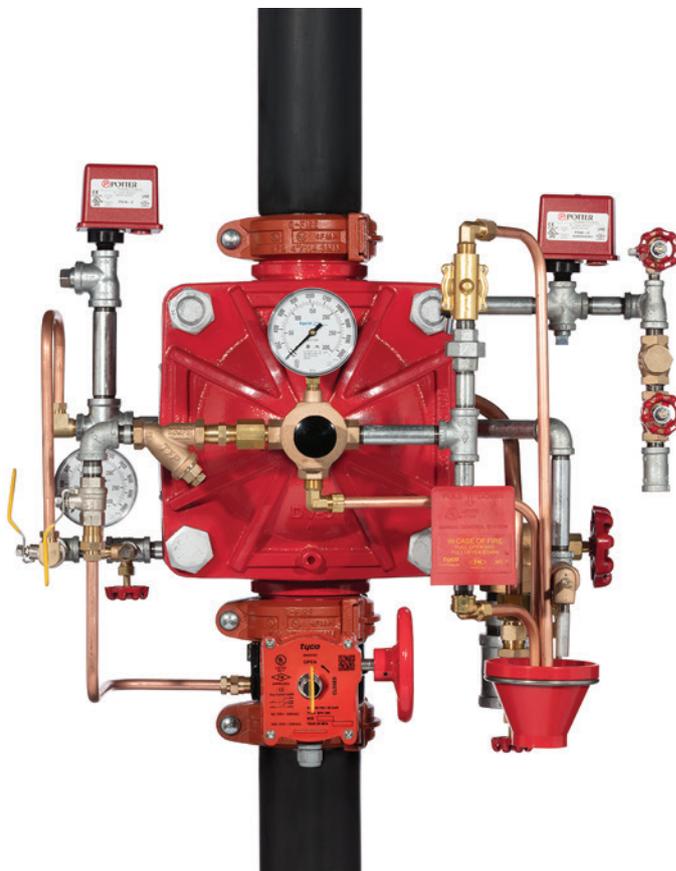

DV-5A Size Range	DN40 thru DN200 (1½" thru 8")
Approvals	UL, C-UL Listed & FM Approved
Maximum Service Pressure Preaction Single Interlock Trim	Wet Pilot Actuation: 20,7 bar (300 psi) Dry Pilot Actuation: 17,2 bar (250 psi) Electric Actuation: Per Solenoid, see TFP2180
End Connection	Thread x Thread, Groove x Groove, Flange x Flange, Flange x Groove
Flange Drilling	ANSI, ISO, AS, & JIS
Tech Data Sheet	TFP1425

Vertical installation ■ One internal working part, Diaphragm operation ■ No linkage or clapper assembly ■ Light weight ductile iron body ■ Internally & externally coated ■ Features external resetting ■ For deluge, preaction & foam systems

Deluge & Preaction Systems

Double Interlock Preaction Systems


Electric/Electric or Electric/Pneumatic Actuation

The DV-5A Double Interlock Preaction Systems are designed for applications such as refrigerated areas that require the maximum degree of protection against inadvertent flooding of the sprinkler system piping.

The double interlock system consists of a deluge valve and swing check valve with releasing trim featuring both a solenoid valve and a dry pilot actuator in a series configuration. The swing check valve isolates the body of the deluge valve from the system air or nitrogen pressure that holds the dry pilot actuator closed. The solenoid valve remains closed until it is electrically energized by a deluge releasing panel that responds to the operation of a fire detection device.

In order to actuate the double interlock preaction system, two independent events, caused by a fire condition, must occur. The sprinkler system piping must lose air or nitrogen pressure due to the operation of one or more sprinklers, and the deluge releasing panel must energize and open the solenoid valve upon the operation of a fire detection device.

The double interlock system will operate only when both the dry pilot actuator and the solenoid valve are open at the same time. Opening of the dry pilot actuator only (for example: a forklift truck accidentally dislodges a sprinkler) or of the solenoid valve only (for example: accidental operation of an electric manual pull station) will cause an alarm, and will not trip the system or flood the sprinkler system piping.

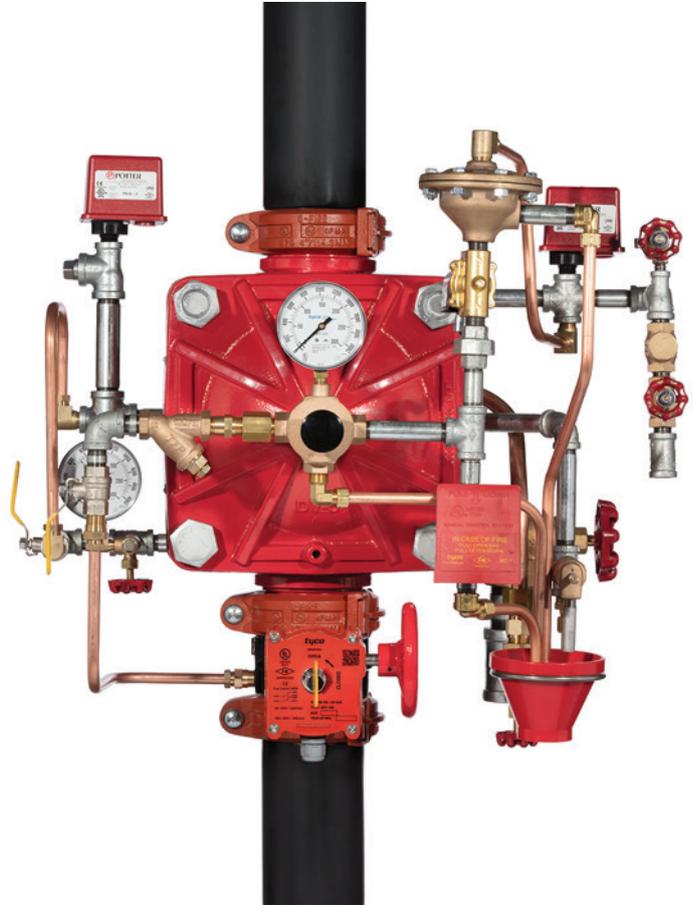

DV-5A Size Range	DN40 thru DN200 (1½" thru 8")
Approvals	UL, C-UL Listed & FM Approved
Preaction Double Interlock Trim	Electric/Electric Actuation, Electric/Pneumatic Actuation
End Connection	Thread x Thread, Groove x Groove, Flange x Flange, Flange x Groove
Flange Drilling	ANSI, ISO, AS, & JIS
Tech Data Sheet	TFFP1450

Vertical installation ■ One internal working part, Diaphragm operation ■ No linkage or clapper assembly ■ Light weight ductile iron body ■ Internally & externally coated ■ Features external resetting ■ For deluge, preaction & foam systems

Deluge & Preaction Systems

RED-E-Cabinet®

Integrated Fire Protection Packages

The TYCO DV-5A Red-E Cabinet is a pre-assembled fire protection valve package enclosed within a free-standing cabinet designed to occupy minimal floor space and to provide an aesthetically pleasing enclosure for a fire protection valve riser. The entire package is pre-wired and the water inlet and outlets to the valve riser are grooved to provide minimal installation time. The valve package includes the system (manual) shut-off control valve, automatic water control valve, and waterflow/supervisory switches. When dry pilot actuation is utilized, a built-in air compressor with associated controls provides an automatic air supply for the dry pilot lines.

Integral to the DV-5A Red-E Cabinet is a control panel and back-up batteries for providing electrical alarm, supervisory, and trouble functions. All switches within the cabinet are pre-wired to the control panel, making the electrical connections for power, detection circuits (as applicable), and alarms the only remaining connections to complete the system.

In addition to the control panel being integral to the DV-5A Red-E Cabinet, windows have been provided in the door for viewing the releasing panel functions and essential system pressure gauges. A lock for the control panel access door is standard, and a lock for the cabinet door is optional.



	Size Range	DN40 thru DN200 (1½" thru 8") valve risers
	Approvals	UL, C-UL Listed & FM Approved
	Maximum Service Pressure	20.7 bar (300 psi)
	Types of System	<p>Deluge Systems: TFP1301</p> <ul style="list-style-type: none"> - Wet Pilot Actuation - Dry Pilot Actuation - Electric Actuation - Remote Reset - Remote Reset Pressure Reducing <p>Single Interlock Preaction Systems: TFP1401</p> <ul style="list-style-type: none"> - Wet Pilot Actuation - Dry Pilot Actuation - Electric Actuation <p>Double Interlock Preaction Systems: TFP1401</p> <ul style="list-style-type: none"> - Electric/Pneumatic Actuation - Electric/Electric Actuation
	End Connection	Groove x Groove
	Tech Data Sheet	<p>TFP1301 – Deluge Systems Cabinet TFP1401 – Preaction Systems Cabinet</p> <p>DV-5A Deluge Valve Tech Data Sheets Deluge Wet / Dry / Electric – TFP1306 Remote Reset – TFP1325 Remote Reset Pressure Reducing – TFP1326 Single Interlock Wet / Dry / Electric – TFP1425 Double Interlock E/E E/P – TFP1450 Type A – TFP1485</p>

Aesthetically pleasing appearance ■ Professionally assembled ■ Minimal installation time ■ Internally wired ■ Custom manufactured ■ Model DV-5A deluge valve (standard) ■ All gauges and panel display are externally visible



General Purpose Valves

Designed for use in wet pipe sprinkler systems.

- Prevention of Reverse Flow
- System Shut-off
- Sectional Control
- Closure of Fire Protection After Operation
- Facilitation of System Testing

General Purpose Valves

PRV-1A

Pressure Reducing Valve Pilot Operated



Sizes	DN50 thru DN200 (2" thru 8")
Approvals	UL, C-UL Listed & FM Approved
Maximum Inlet Pressure	17,2 bar (300 psi)
Factory Outlet "Set Pressure"	8,6 bar (125 psi)
Field Outlet "Set Pressure" Range	6,2 to 12 bar (90 to 175 psi)* * = Sizes DN50, DN80, DN150, & DN200 (2", 3", 6", & 8") are rated to a set pressure of 5,5 to 12 bar (80 to 175 psi)
End Connection	Groove x Groove, Flange x Flange
Tech Data Sheet	TFP1581

Reduces a higher inlet pressure to a lower outlet delivery pressure in water-filled pipes ■ One pilot valve provides for any outlet "set pressure" thanks to sub-assembly ■ Uses the DV-5A valve body, incorporating the simple diaphragm design ■ Factory assembled and fully trimmed ■ In-line service

RV-1A

Pressure Relief Valve Pilot-Operated



Sizes	DN50 thru DN200 (2" thru 8")
Approvals	UL, C-UL Listed & FM Approved
Maximum System Pressure	20,6 bar (300 psi)
Field Relief "Set Pressure" Range	2,1 to 17,2 bar (30 to 250 psi)
Temperature Range	10°C to 80°C (50°F to 175°F)
End Connection	Groove x Groove or Flange x Flange
Flange Drilling	ANSI & ISO
Tech Data Sheet	TFP1586

Automatically relieves excess pressure in a fire protection system to maintain a relatively constant system pressure as flow demands change ■ Uses the DV-5A valve body, incorporating the simple diaphragm design ■ One pilot valve provides for any outlet "set pressure" thanks to sub-assembly ■ No need to bleed trapped air from the diaphragm chamber ■ Simple trim configuration ■ Factory assembled and fully trimmed ■ In-line service

General Purpose Valves

Model TJR Series Resilient-Seated Gate Valves

Outside Screw and Yoke



Sizes	DN50 thru DN400 (2" thru 16")
Approvals	UL & C-UL Listed & FM Approved
Maximum Working Pressure	UL - 20,7 bar (300 psi) up to DN300 (12") FM - 16,0 bar (232 psi) up to DN300 (12")
End Connection	Flange x Flange, Flange x Groove, Groove x Groove
Flange Drilling	ANSI, PN, AS
Tech Data Sheet	TFP1541

TYCO TJ Series Resilient-Seated Gate Valves are offered in multiple end connection configurations including: Flange by Flange, Flange by Groove, and Groove by Groove ■ Tapping bossed for up and downstream connection to valve trims ■ Ductile iron wedge gate, fully encapsulated with EPDM rubber ■ Corrosion-resistant components

Model TJP Series Resilient-Seated Gate Valves

Non-Rising Stem, Cross Wall Indicator Post, Vertical Indicator Post



Sizes	Valves: DN50 thru DN600 (2" thru 24") Wall Post: DN50 thru DN300 (2" thru 12") Vertical Post: DN50 thru DN400 (2" thru 16")
Approvals	UL & C-UL Listed & FM Approved
Maximum Working Pressure	UL - 20,7 bar (300 psi) FM - 16,0 bar (232 psi)
End Connection	Flange x Flange, Flange x Groove, Groove x Groove
Flange Drilling	ANSI & ISO
Tech Data Sheet	TFP1546

TYCO TJ Series Resilient-Seated Gate Valves are offered in multiple end connection configurations including: Flange by Flange, Flange by Groove, and Groove by Groove ■ Ductile iron wedge gate, fully encapsulated with EPDM rubber ■ Corrosion-resistant components ■ Indicators provide external visual indication of the open or shut valve condition as well as a locking mechanism to secure a particular wedge position.

General Purpose Valves

BFV-300

Grooved Butterfly Valve



Sizes	DN50 thru DN300 (2" thru 12")
Approvals	UL Listed, FM Approved, CE Certified VdS Approved, Russian Fire Certificate CNPP R1 Listed – APSAD Listed by California State Fire Marshall
Maximum Working Pressure	UL/FM Maximum Working Pressure DN50 – DN200 (2" – 8") 20,7 bar (300 psi) DN250 – DN300 (10" – 12") 12,1 bar (175 psi) VdS Maximum Working Pressure DN50 – DN200 (2" – 8") 20,7 bar (300 psi) DN250 (10") 16,0 bar (232 psi) DN300 (12") 12,1 bar (175 psi)
Maximum Working Temperature	100°C (212°F) in accordance with UL 1091
End Connection	Groove x Groove
Tech Data Sheet	TFP1511

BFV-300 (Normally Open) and BFV-300C (Normally Closed) ■ Indicating type valves provide visual indication of whether the valve is open or closed ■ Suitable for use with grooved pipe couplings that are listed or approved for fire protection service

Wafer Style Butterfly Valve



Sizes	DN50 thru DN300 (2" thru 12")
Approvals	UL Listed, FM Approved, CE Certified VdS Approved, Russian Fire Certificate CNPP R1 Listed – APSAD Listed by California State Fire Marshall
Maximum Working Pressure	UL/FM Maximum Working Pressure DN50 – DN200 (2" – 8") 20,7 bar (300 psi) DN250 – DN300 (10" – 12") 12,1 bar (175 psi) VdS Maximum Working Pressure DN50 – DN200 (2" – 8") 20,7 bar (300 psi) DN250 (10") 16,0 bar (232 psi) DN300 (12") 12,1 bar (175 psi)
Maximum Working Temperature	100°C (212°F) in accordance with UL 1091
End Connection	Wafer
Tech Data Sheet	TFP1516

Suitable for use installation between ANSI Class 125 or 150 flanges or PN10/16 flanges without the need for flange gaskets ■ Indicating type valves provide visual indication of whether the valve is open or closed

General Purpose Valves

CV-1F

Grooved Check Valve



Sizes	DN50 thru DN250 (2" thru 10")
Approvals	UL, C-UL Listed & FM & VdS Approved Compliance with CE Pressure Equipment Directive (PED) and Standards of Engineering Practice
Maximum Working Pressure	UL/FM - 20,7 bar (300 psi) VdS - 16 bar
End Connection	Groove x Groove, Flange x Flange, Flange x Groove
Tech Data Sheet	TFP1550

Can be installed either vertically or horizontally ■ Cut groove inlet and outlet connections ■ Suitable for use with grooved pipe couplings that are listed or approved for fire protection service

CV-300B

Grooved End Swing Check Valve



Sizes	DN100 (4")
Approvals	UL, C-UL Listed & FM Approved
Maximum Working Pressure	20,7 bar (300 psi)
End Connection	Groove x Groove
Tech Data Sheet	TFP1552

The TYCO Model CV-300B Grooved End Swing Check Valves are compact and rugged swing-type units that allow water flow in one direction and prevent flow in the opposite direction ■ The Model CV-300B Check Valves are designed to minimize water hammer caused by flow reversal ■ A resilient elastomer seal facing on the spring-loaded clapper ensures a leaktight seal and non-sticking operation.

Lansdale Powerball 300

Bronze Butterfly Valve



Sizes	1" - 2-1/2" NPT 1-1/4" - 2-1/2" Grooved
Approvals	UL Listed & FM Approved
Maximum Service Pressure	20.7 bar (300psi)
Tech Data Sheet	Contact Tyco for details

Bronze body butterfly valves are designed specifically for fire protection applications ■ Feature slow closure that substantially minimizes water hammer ■ May be used as sectional or small system control valves where a distinct visual indication of the valve status is required ■ Complete with Position Indicator and Integral Tamper Switch

General Purpose Valves

Trim Valves



Tech Data Sheet

Contact Tyco for details

For general service such as shut-off, throttling, or drain valves ■ Provide positive shut-off under normal operating conditions

DP-1

Dry Pilot Actuator



Approvals

UL, C-UL Listed & FM, LPCB Approved

Maximum Water Supply Pressure

17,2 bar (250 psi)

Maximum System Air (Nitrogen) Pressure

3,4 bar (50 psi)

Tech Data Sheet

TFP1380

Dry Pilot Actuator is an auxiliary releasing device ■ When the Model DP-1 actuates, it permits water pressure to be released from the deluge or preaction valve differential chamber, thereby allowing the deluge or preaction valve to open ■ Designed for Preaction Valves having double interlock electric/pneumatic release

ASV-1

Automatic Shut-Off Valve, Trim Component



Approvals

UL, C-UL Listed & FM Approved

Maximum Working Water Pressure

17,2 bar (250 psi)

Tech Data Sheet

TFP1384

Intended for use with the DV-5 Deluge Valve in deluge and preaction systems ■ Prevents inadvertent resetting of the DV-5 Valve after the DV-5 Valve initial operation ■ Provided as part of the DV-5 Valve trim arrangements, it is installed in the diaphragm chamber supply connections

FSV-1

Fail-Safe Valve, Trim Component



Approvals

UL, C-UL Listed & FM Approved

Maximum Working Water Pressure

17,2 bar (250 psi)

Tech Data Sheet

TFP1386

Intended for use with the Model DV-5 Deluge Valve in certain types of trim arrangements for deluge and preaction systems ■ Prevents inadvertent resetting of the DV-5 after initial operation of the DV-5 Valve



Specialty Items & Antifreeze

Complement the system components used in fire protection systems.

- UL Certified Antifreeze for Fire Sprinkler Systems
- Automatic Actuation of Electric &/or Hydraulic Alarms
- Automatic Quarterly Flow Switch Tests
- Eliminate Expelled Water
- Reduce Accidental Manual Shut-Off

Specialty Items

DD-1 (Drum Drip)

Wiliag™ Condensate Drain



Overall Length	615 mm (24")
Turning radius	64 mm (2.5")
Tech Data Sheet	Contact Tyco for details

Ready to install ■ No power machine required for cutting pipe and making fittings ■ No power machine for repair ■ Eliminates potential leaks ■ Eliminates labor of fabrication ■ Classic look of a professional job ■ Net weight only 6.25 lbs.

FL-1

Fusible Links



Approvals	UL, C-UL Listed & FM Approved
Load Rating	2,3 to 22,7kg (5 to 50 lbs). Continuous Load
Temperature Rating	74°C (165°F), 100°C (212°F), 141°C (286°F), 162°C (360°F), 260°C (500°F)
Tech Data Sheet	TFP1610

Heat-activated releasing device designed for installation in mechanically operated systems requiring a positive acting release mechanism ■ Used extensively as releasing devices in restaurants and industrial fire protection systems, as well as in heat-activated counterbalanced systems such as fire doors, dampers and kitchen chemical systems ■ Consists of fusible alloy sealed in the center of a bronze tube by a stainless steel ball ■ When the alloy melts, the fusible assembly compresses, allowing it to eject from between the two-piece strut, strut assembly separates, activating the intended fire protection system or device

MC-1

Manual Control Station



Approvals	UL, C-UL Listed & FM Approved
Working Water Pressure	1,4 to 20,7 bar (20 to 300 psi)
Minimum Ambient Temperature	Dry Pilot Lines: -46°C (-50°F) Wet Pilot Lines: 4°C (40°F)
Tech Data Sheet	TFP1382

Provides a tamper resistant means for emergency release ■ Interconnection with the valves may be direct via hydraulic (wet) pilot line or indirect via pneumatic (dry) pilot line to a Model DP-1 Dry Pilot Actuator

Specialty Items

Model A

Pipe Line Strainers



Sizes	DN80 thru DN250 (3" thru 10")
Approvals	UL, C-UL Listed & FM Approved
Maximum Working Pressure	12,1 bar (175 psi)
Strainer Basket Screen	3,2 mm (1/8") diameter holes spaced to provide 40 percent open area.
Tech Data Sheet	TFP1640

Model A Pipe Line Strainers are designed for installation in the water supply connection to automatic sprinkler, water spray deluge, foam-water deluge, or standpipe fire protection systems.

Model B-1

Pipe Line Strainers



Sizes	DN80 thru DN150 (3" thru 6")
Approvals	UL, C-UL Listed & FM Approved
Maximum Working Pressure	12,1 bar (175 psi)
Strainer Basket Screen	3,2 mm (1/8") diameter holes spaced to provide 40 percent open area.
Tech Data Sheet	TFP1642

The Model B-1 Pipe Line Strainers are designed for installation in the water supply connection to automatic sprinkler, water spray deluge, foam-water deluge, or standpipe fire protection systems.

Model C

Pipe Line Strainers



Sizes	DN150 x DN150 (6" x 6"), DN200 x DN200 (8" x 8")
Approvals	UL, C-UL Listed & FM Approved
Maximum Working Pressure	7,2 bar (250 psi)
Strainer Basket Screen	3,2 mm (1/8") diameter holes spaced to provide 40 percent open area.
Tech Data Sheet	TFP1644

Compact lightweight welded hot dipped galvanized assembly with flanged inlet, outlet and flushing connection ■ Corrosion resistant Type 304 stainless steel screen especially designed for low pressure loss

Specialty Items

Signs

Identification Signs



Sizes	229 x 178mm (9" x 7"), 152 x 51mm (6" x 2"), 127 x 178mm (5" x 7"), Round: 184mm Dia. (7-1/4" Dia.)
Signs	AIR CONTROL AIR LINE ALARM TEST ANTIFREEZE SYSTEM AUXILIARY DRAIN CONTROL VALVE DRAIN DRAIN VALVE FIRE ALARM HYDRAULIC CALCULATION INSPECTORS TEST MAIN CONTROL MAIN DRAIN
Tech Data Sheet	TFP1615

Designed to provide information to the end user about the sprinkler system and its components ■ Available with a variety of wording combinations to meet the signage requirements of NFPA 13

SF-1

Sight Flow Connection



Sizes	DN25 and DN50 (1" and 2")
Approvals	UL Listed & FM Approved
Maximum Working Pressure	12,1 bar (175 psi)
Tech Data Sheet	TFP1635

Designed for use in fire protection systems as a means for visibly checking that water is flowing and filling the pipe at that point ■ May be installed vertically or horizontally

Fire Department Connections

Straight & 90° Fire Department Connections



Pattern	90° Side Outlet Pattern Straight -Through Siamese Pattern
Tech Data Sheet	Contact Tyco for details

Designed for fire department use to increase water pressure and volume to automatic sprinkler system or standard-pipe system

Specialty Items

AD-1

Automatic Drain Valve



Approvals

The Model AD-1 Automatic Drain Valve forms a part of the overall approvals given in the applicable technical data sheets for the TYCO Dry Pipe, Deluge, or Preaction Valves.

Maximum Working Pressure

17,2 bar (250 psi)

Tech Data Sheet

TFP1630

Designed for use with Tyco Dry Pipe, Deluge, and Preaction Valves ■ Provided as a trim component for these valves, the Model AD-1 Automatic Drain Valve is used to automatically drain the normally dry alarm lines

AD-2

Automatic Drain Valve



Approvals

UL Listed & FM Approved

Maximum Working Pressure

12,1 bar (175 psi)

Tech Data Sheet

TFP1632

Designed to automatically drain water from fire protection equipment supply connections that are to be maintained normally dry ■ Installed vertically and utilized with an open drain

Hangers

Pipe Hangers



Tech Data Sheet

Contact Tyco for details

A full-line of pipe hangers for every fire protection need ■ Manufactured to meet the quality standards that the industry demands ■ Meet the requirements of NFPA 13

Specialty Items

The AQUAMIST System

AM4 Non-Automatic Open Type



K Factor	K=0.24 (3,5)
Tech Data Sheet	TFP2204

Open, directional mist nozzles ■ They are intermediate pressure nozzles which utilize a single fluid jet impinging on a diffuser to produce a spray having a range of water droplet sizes suitable for the extinguishment of Class B fires, as well as incidental Class A fires ■ Maximum utilization of water for flammable liquid fire protection.

AM24 Automatic Type Mist Nozzle



K Factor	4.7 lpm/bar 1/2, 0.33 gpm/psi 0.5
Approvals	UL
Tech Data Sheet	Tyco for details

Listed and Approved for Marine Type Approved by Lloyds, USCG, DNV, American Bureau of Shipping, MCA, Germanischer Lloyd, Bureau Veritas ■ Intended Applications – IMO Mandated Local Application System for Protection of Class A Machinery Spaces ■ Nozzle pressure: 12,1 to 17,2 bar.

AM10 & AM10B Non-Automatic Open Type



K Factor	K=0.24 (3,5)
Tech Data Sheet	TFP2210

Open mist nozzles ■ Designed for use in water “low pressure” mist protection systems protecting flammable liquids and turbine bearings ■ Minimal water demand ■ Min. operating pressure is 11,6 bar (170 psi)

AQUAMIST Mist Control Center (MCC) Pump Skid Unit



Approvals	FM
Tech Data Sheet	TFP2270

The “MCC” Pump Skid Package is the self-contained control center of the AQUAMIST System. The compact skid unit has been professionally designed and assembled to ease system installation and to meet the most stringent project requirements. ■ Power must be provided for the control cabinet and pump controller ■ Detection circuits must be installed and wired to the control cabinet. ■ An adequate water supply must be piped to the pump supply piping inlet.

How the AQUAMIST System Works

1

- Evaporation (heat extraction) is a function of surface area of droplets
- Reducing droplet size increases surface area
- Increase in surface area allows for larger cooling effect for a given flow

2

- Water converts to vapor expanding by a factor of 1650 times
- Oxygen is displaced and diluted, thereby blocking it from the fuel source
- Higher heat level causes a faster vaporization

3

- Fire extinguishment is improved with direct contact of water droplets
- This type of extinguishment is normally associated with standard sprinklers
- Important part of operation if ventilation is a factor and Class A combustibles are present

4

- Small water droplets tend to remain suspended
- The expanding mist will expand and cool the gases and other fuels in the area
- Blocks the transfer of radiant heat to the adjacent combustibles and pre-wets them



Grooved Piping Products

Designed for use in fire protection systems.

- Easy One-Bolt Coupling for Fast Install
- Rigid Connections for Long Runs & Risers
- Quickly Join Steel Pipe without Welding
- Dampening Noise & Vibration Transmission

Grooved Piping Products

Figure 579

One-Bolt Rigid Coupling



Sizes	DN32 thru DN100 (1-1/4" thru 4")
Approvals	UL, ULC Listed & FM, VdS, & LPCB Approved
Maximum Working Pressure	Up to 25,2 bar (365 psi)
Grade "A" EPDM Pre-Lubricate Gasket Temperature	-34°C to 66°C (-30°F to 150°F)
Tech Data Sheet	TFP1856

For use in fire protection systems, the GRINNELL G-Fire Figure 579 Grooved Rigid Coupling is designed to make joining pipe faster and easier than ever before. ■ Arriving pre-assembled and pre-lubricated, this One-Bolt Coupling is ready to install right out of the box. ■ The unique design consists of a three-piece housing, a center-stop gasket, and just one bolt to tighten. ■ The center-stop gasket ensures proper positioning on the pipe and enables easy push-on installation in both horizontal and vertical applications across wet, dry and freezer systems. ■ The unique, one-bolt design eliminates alternate tightening for a faster, more efficient installation. ■ It is capable of pressures up to 25,2 bar (365 psi) depending on pipe size and wall thickness when used in fire protection services.

Figure 577

Rigid Coupling



Sizes	DN25 thru DN300, (216,3; 267,4; & 318,5 JIS), (1" thru 12")
Approvals	UL, ULC Listed & FM, VdS, & LPCB Approved
Maximum Working Pressure	24, 1 bar (350 psi)
Grade "A" EPDM Pre-Lubricate Gasket Temperature	-34°C to 66°C (-30°F to 150°F)
Tech Data Sheet	TFP1854

For use in fire protection systems, the GRINNELL G-FIRE Figure 577 Grooved Rigid Coupling provides a rigid joint by firmly gripping along the full circumference of the pipe grooves. Figure 577 Grooved Rigid Couplings are a proven dependable method of joining pipe and are an economical alternative to welding, threading, or using flanges. ■ It is capable of pressures up to 24, 1 bar (350 psi) depending on pipe size and wall thickness when used in fire protection services. ■ Also available with tri-seal Grade "E" EPDM gasket for dry pipe fire protection systems, vacuum systems, and freezer applications

Grooved Piping Products

Figure 705

Grooved Flexible Coupling



Sizes	DN25 thru DN300, (267,4; & 318,5 JIS), (1" thru 12")
Approvals	UL, ULC Listed & FM, VdS, & LPCB Approved
Maximum Working Pressure	20,7 bar (300 psi)
Grade "E" EPDM Gasket Temperature	-34°C to 110°C (-30°F to 230°F)
Tech Data Sheet	TFP1820

The GRINNELL G-FIRE Figure 705 Flexible Coupling is capable of pressures up to 20,7 bar (300 psi) depending on pipe size and wall thickness when used in fire protection services. It provides a dependable method of joining pipe and is suitable for use in a variety of applications. ■ Provides the needed flexibility to accommodate differential movement ■ Also available with tri-seal Grade E EPDM gasket for dry pipe fire protection systems, vacuum systems, and freezer applications

Figure 707

Flexible Coupling



Sizes	DN32 x DN300 (1-1/4" x 12")
Approvals	UL, ULC Listed & FM, VdS, & LPCB Approved
Maximum Working Pressure	34,5 bar (500 psi)
Grade "E" EPDM Gasket Temperature	-34°C to 110°C (-30°F to 230°F)
Tech Data Sheet	TFP1840

The GRINNELL 707 Flexible Coupling provides a dependable method of joining pipe and is suitable for use in a variety of applications ■ Capable of pressures up to 34,5 bar (500 psi) depending on pipe size and wall thickness ■ Also available with tri-seal Grade "E" EPDM gasket for dry pipe fire protection systems, vacuum systems, and freezer applications

Figure 716

Flexible Reducing Coupling



Sizes	DN50 x DN40 (2" x 1-1/2") through DN200 x DN150 (8" x 6")
Approvals	UL, ULC Listed & FM, VdS, & LPCB Approved
Maximum Working Pressure	24,1 bar (350 psi)
Grade "E" EPDM Gasket Temperature	-34°C to 110°C (-30°F to 230°F)
Tech Data Sheet	TFP1830

The GRINNELL G-FIRE 716 Reducing Coupling allows easy transition between two different pipe sizes and replaces two couplings and a reducing fitting ■ It is capable of pressures up to 24,1 bar (350 psi) depending on pipe size and wall thickness. A flexible reducing coupling is not recommended for low-temperature applications. ■ Faster and easier than threading, welding or using flanges

Grooved Piping Products

Figure 71

Flange Adapter



Sizes	DN50 x DN300 (2" x 12")
Approvals	UL, ULC Listed & FM, VdS, & LPCB Approved
Maximum Working Pressure	17,2 bar (250 psi)
Grade "E" EPDM Gasket Temperature	-34°C to 110°C (-30°F to 230°F)
Flange Drilling	ANSI Class 125 and 150, or PN16 standards
Tech Data Sheet	TFP1880

The GRINNELL 71 Flange Adapter allows for a direct transition from flanged components to a grooved piping system ■ Capable of pressures up to 17,2 bar (250 psi) depending on pipe size and wall thickness

Figure 730

Mechanical Tees & Crosses



Run Sizes	DN50 x DN200 (2" x 8")
Branch Sizes	DN15 to DN100 outlets (1/2" to 4")
Approvals	UL, ULC Listed & FM, VdS, & LPCB Approved
Maximum Working Pressure	20,7 bar (300 psi)
Grade "E" EPDM Gasket Temperature	-34°C to 110°C (-30°F to 230°F)
Tech Data Sheet	TFP1860

The GRINNELL 730 Mechanical Tees & Crosses come with threaded or grooved outlets and can be used for any tee connection where a threaded or grooved outlet is needed. ■ It can be used in place of a tee, a cross connection, or a welded outlet where a threaded or grooved outlet is needed. ■ The Mechanical Tee is ideal for use in retrofit or equipment hookup installations as it can be positioned along the pipe at the proper location in the field, ensuring exact lineup of the branch outlet connection.

Grooved Piping Products

Grooved Fittings

Elbows, Tees, Reducers, Caps, Crosses and Flange Adapters

	Sizes Range	DN25 x DN300, (216,3; 267,4; & 318,5 JIS), (1" x 12")
	Approvals	UL, ULC Listed & FM, VdS, & LPCB Approved
	Maximum Working Pressure	20,7 bar (300 psi)
	Tech Data Sheet	TFP1815

Provide an economical and efficient method of changing direction, adding an outlet, reducing or capping grooved piping systems ■ Cast grooved fittings provide full flow characteristics ■ Full back stop behind the groove to ensure proper coupling engagement and rigidity ■ 90° elbows and tees are also available in the "short pattern" style ■ Available painted or galvanized finish

	<p>Figure 510S Short Pattern 90° Cast Elbows Sizes DN50 – DN200 (2" thru 8")</p>
	<p>Figure 510 90° Cast Elbows Sizes DN25 – DN300, (267,4; & 318,5 JIS), (1" thru 12")</p>
	<p>Figure 510DE 90° Drain Elbows Sizes DN50 – DN200 (2" thru 8")</p>
	<p>Figure 501 45° Cast Elbows Sizes DN25 – DN300 (1" thru 12")</p>
	<p>Figures 512 & 312 22-1/2° Elbows Sizes DN32 – DN300 (1-1/4" thru 12")</p>
	<p>Figures 511 & 311 11-1/4° Elbows Sizes DN32 – DN300 (1-1/4" thru 12")</p>
	<p>Figure 519S Short Pattern Tee Sizes DN50 – DN200 (2" thru 8")</p>
	<p>Figure 519 Tees Sizes DN25 – DN300, (267,4; & 318,5 JIS), (1" thru 12")</p>
	<p>Figure 320 Groove x Groove x Male Thread Reducing Tees Sizes DN25 – DN300 (1" thru 12")</p>

	<p>Figures 221 & 321 Reducing Tees Sizes DN32 x DN25 thru DN300 x DN250, (216,3; 267,4; & 318,5 JIS), (1-1/4" x 1" thru 12" x 10")</p>
	<p>Figure 323 Groove x Groove x Male Thread Reducing Tees Sizes DN50 x DN20 thru DN300 x DN250 (2" x 3/4" thru 12" x 10")</p>
	<p>Figures 391, 392, & 393 Adaptor Nipples Sizes DN32 – DN300 (1-1/4" thru 12")</p>
	<p>Figure 372 Reducers, Small End Threaded (Male) Sizes DN40 x DN25 thru DN150 x DN125 (1-1/2" x 1" thru 6" x 5")</p>
	<p>Figures 250, 550 & 350 Concentric Reducers Sizes DN32 x DN25 thru DN300 x DN250, (216,3; 267,4; & 318,5 JIS), (1-1/4" x 1" thru 12" x 10")</p>
	<p>Figures 327 Fabricated Crosses Sizes DN25 – DN300, (216,3 JIS), (1" thru 12")</p>
	<p>Figures 260 & 360 End Caps Sizes DN25 – DN300, (216,3; 267,4; & 318,5 JIS), (1" thru 12")</p>
	<p>Figure 341 & 342 Flange Adapters Sizes DN25 – DN300, (216,3 JIS), (1" thru 12")</p>

Grooved Piping Products

40-5

Strap Outlets



Pipe Run Sizes	DN32 to DN65 Outlets (1- ¹ / ₄ " to 2- ¹ / ₂ ")
Outlet Thread Sizes	¹ / ₂ " to 1" NPT Outlet
Approvals	UL, ULC Listed & FM Approved
Maximum Working Pressure	12,1 bar (175 psi)
Grade "E" EPDM Gasket Temperature	-34°C to 110°C (-30°F to 230°F)
Tech Data Sheet	TFP1720

The Figure 40-5 Strap is an economical alternative to welded pipe outlets on steel pipe. ■ Can be used with full lengths of pipe and eliminates threading and welding, decreasing waste and installation time. ■ Can be used in wet, dry pipe, and deluge systems

ADACAP®

End of Line Sprinkler Fitting



Pipe Run Sizes	DN40 to DN65 Outlets (1- ¹ / ₂ " to 2- ¹ / ₂ ")
Outlet Thread Sizes	¹ / ₂ " to 1" NPT Outlet
Approvals	UL, ULC Listed & FM, VdS, & LPCB Approved
Rated Pressure	20,7 bar (300 psi)
Tech Data Sheet	TFP1815

Used to install the last sprinkler on grooved branch line piping or as a drain fitting ■ End-of-the-line sprinkler fittings eliminate the need for an end cap and female outlet ■ Can be turned down for end of line drain



Tyco CPVC Pipe & Fittings

Manufactured with BlazeMaster® compound.

- Light Hazard & Residential Occupancies
- Unfinished basements
- Underground Water Pressure Service
- Connections to Copper & Steel Piping
- Resistance of Sweating, Condensation, & MIC

BlazeMaster®
FIRE PROTECTION SYSTEMS

CPVC Pipe & Threaded Fittings

CPVC Pipe

Sprinkler Pipe



Sizes	DN20 thru DN80 (¾" thru 3")
Pipe Length	10' and 15' Lengths
Approvals	UL, C-UL Listed & FM, MEA, NSF, & LPCB Approved
Rated Pressure	12,1 bar (175 psi)
Maximum Temperature Rating	65°C (150°F).
Tech Data Sheet	TFP1915 and Installation Handbook - IH-1900

Manufactured with Lubrizol's BLAZEMASTER® compound ■ Produced from BlazeMaster® thermoplastic compound, RAPID RESPONSE CPVC pipe is designed exclusively for use in wet and dry pipe automatic fire sprinkler systems. ■ Our CPVC pipe is easier to install than traditional steel components, while providing superior heat resistance and strength compared to traditional CPVC and PVC piping materials. ■ TYCO CPVC sprinkler pipe conforms to the requirements of ASTM F442 and is produced to SDR 13.5. SDR (Standard Dimension Ratio) is the ratio of the outside pipe diameter to the wall thickness of the pipe.

Fittings



Sizes	DN20 thru DN80 (¾" thru 3")
Approvals	UL, C-UL Listed & FM, MEA, NSF, & LPCB Approved
Rated Pressure	12,1 bar (175 psi)
Maximum Temperature Rating	65°C (150°F).
Tech Data Sheet	TFP1915 and Installation Handbook - IH-1900

Manufactured with Lubrizol's BLAZEMASTER® compound ■ Produced from BlazeMaster® thermoplastic compound, RAPID RESPONSE CPVC fittings are designed exclusively for use in wet and dry pipe automatic fire sprinkler systems. ■ Our CPVC is easier to install than traditional steel components, while providing superior heat resistance and strength compared to traditional CPVC and PVC fitting materials. ■ Tees, Crosses, Reducing Tees & Crosses, 90° Elbows, 45° Elbows, Couplings, Bushings, Caps, Sprinkler Head Adapters, Grooved Coupling Adapters, Female and Male Adapters, Sprinkler Adapter Tees, etc...

Rapid Seal Adapter (RSA) Fittings



Sizes	DN15 thru DN25 (½" thru 1")
Pipe Thread Connection	½" NPS
Approvals	UL, C-UL Listed, FM Approved, & LPCB Certified NSF-pw Certified
Rated Pressure	12,1 bar (175 psi)
Maximum Temperature Rating	65°C (150°F).
Tech Data Sheet	TFP1925 and Installation Handbook - IH-1900

Enhanced product line expanded to include 11 expertly designed models ■ All-CPVC sprinkler head adapter manufactured with Lubrizol BlazeMaster® CPVC compound. ■ Fast and easy installation with no need for thread tape or sealant ■ No brass means no dezincification and no lead complies with growing state and federal low-lead requirements ■ 90° Elbow, Straight Adapter, Spigot, Tee, Back to Back Tee, Back to Back Cross

CPVC Pipe & Threaded Fittings

CPVC

Back-to-Back Fittings



Sizes	DN20 thru DN80 (¾" thru 3")
Approvals	UL, C-UL Listed & FM, MEA, NSF, & LPCB Approved
Rated Pressure	12,1 bar (175 psi)
Maximum Temperature Rating	65°C (150°F).
Tech Data Sheet	TFP1915 and Installation Handbook - IH-1900

Included in the Tyco line of BLAZEMASTER® CPVC products ■ Allows two sidewall sprinklers to be piped from one fitting ■ Ideal when the CPVC piping is located in a 3-½" (2" x 4") vertical wall, eliminating the need for extra nipples, fittings and sprinkler head adapters typically associated with supplying two rooms with the same pipe ■ Specially designed and dimensioned to enable the sidewall sprinklers to be recessed with ½" or ⅝" sheet-rock wall covering

CPVC to Copper Fitting



Sizes	DN20 thru DN50 (¾" thru 2")
Approvals	UL, C-UL Listed & FM, MEA, NSF, & LPCB Approved
Rated Pressure	12,1 bar (175 psi)
Maximum Temperature Rating	65°C (150°F).
Tech Data Sheet	TFP1915 and Installation Handbook - IH-1900

Transition to BLAZEMASTER pipe from traditional copper tube for plumbing services ■ Transition to steel or BLAZEMASTER CPVC Fire Sprinkler System piping from traditional copper tube for plumbing services is fast, easy, and readily available in the most complete fire sprinkler package in the industry

CPVC Hangers & SHB1 Head Set



Sizes	¾" thru 1" NPT
Approvals	UL Listed
Material	Galvanized aluminum, 20 gauge
Tech Data Sheet	TFP1920 and Installation Handbook - IH-1900

"No Block Hanger" is a two hole strap that eliminates blocking to the beam when hanging CPVC pipe ■ The TYCO CPVC Hanger Head Set Model SHB1 offers a time saving installation method for proper placement of an automatic sprinkler before the ceiling is installed. ■ Positions the face of the pipe 1-½" off the face of the joist ■ Provides vertical restraint, eliminating need for additional hangers

CPVC Supplies



Tech Data Sheet	TFP-600 One Step Solvent Cement (TFP1994) and CPVC Installation Handbook (IH-1900)
-----------------	---

One-Step CPVC Cement specifically formulated for use with BlazeMaster® pipe and fittings ■ BLAZEMASTER Caulk and Walk® Firestop



Measuring and Electrical Devices

Allow fire protection systems to be interfaced with alarm systems.

- Improved system monitoring capabilities
- Programmable options for specific system requirements
- Able to send an electrical or mechanical signal for alarm/notification purposes
- Installation options for both new and existing systems

Electrical Devices

VSR Waterflow Alarm Switch

Flow & Pressure Switch



Sizes

DN50 thru DN200 (2" thru 8")

Tech Data Sheet

Contact Tyco for details

Vane type waterflow switch for use on wet sprinkler systems ■ Actuated with a minimum flow of 10 gallons per minute ■ Retard delay is an adjustable feature that can be set from 0 to 90 seconds ■ Flow condition must exist for the period of time necessary to overcome the selected delay period

VSR Waterflow Alarm Switch for Small Pipe

Flow & Pressure Switch



Sizes

DN25 thru DN50 (1" thru 2")

Tech Data Sheet

Contact Tyco for details

Vane type waterflow switch for use on wet sprinkler systems ■ May also be used as a sectional water flow detector on large systems ■ Installs directly into a threaded tee

Model PS10/PS40 Pressure alarm Switch

Flow & Pressure Switch



Tech Data Sheet

Contact Tyco for details

Designed to detect a pressure increase or decrease in fire sprinkler systems ■ PS40 switches are primarily used to monitor low air pressure conditions in dry systems ■ PS10 switch is appropriate for water flow detection

Electrical Devices

PCVS Control Valve Supervisory Switch

Tamper & Alarm Switch



Tech Data Sheet

Contact Tyco for details

Weather proof and tamper resistant switch for monitoring the open position of post indicator, butterfly and other types of fire sprinkler/control valves

OSY-SU

Tamper & Alarm Switch



Tech Data Sheet

Contact Tyco for details

Used to monitor the open position of an OS&Y (outside screw and yoke) type gate valve ■ Mounts conveniently to most OS&Y valves ranging in size from DN50 to DN300 (2" to 12") ■ Can be used on some valves as small as 1/2" ■ Models include options for one or two sets of SPDT (Form C) contacts.

Solenoid Valve

For Releasing Service



Sizes

DN15 (1/2")

Approvals

UL Listed, FM Approved & CE Certified

Working Pressure

1,4 - 17,2 bar (20 thru 250 psi)

Tech Data Sheet

TFP2180

Used in conjunction with an electric releasing panel that is listed or approved (as appropriate) for fire protection releasing service, and where the releasing panel is operated by listed or approved (as appropriate) electric fire detectors ■ Available in a variety of voltages for both normal and hazardous locations

Electrical Devices

4410-RC

Releasing Panel



Approvals

UL Listed & FM Approved

Tech Data Sheet

Contact Tyco for details

Provides the interface between detection system, deluge or single or double interlocked preaction valve, and signaling circuit and devices in electrically actuated fire protection systems ■ Separate supervisory zone provided for electronic supervision of valve position, low pressure, and other critical fire protection functions ■ Can be used in single zone, cross zone, sequential or cross/sequential electric deduction systems ■ Has programming capability

Tank Mounted Air Compressor

For Dry Pipe Sprinkler Systems



Tech Data Sheet

Contact Tyco for details

Designed for the same high-performance as base mounted units ■ Compressor is mounted on an air tank to offer further ease of installation and availability ■ Automatic and safety features are built into the unit, reducing installation costs ■ Multiple dry systems may be supplied from a single compressor tank that is a constant source of air ■ This is the recommended air supply method for all dry pipe sprinkler systems

Base Mounted Air Compressor

For Dry Pipe Sprinkler Systems



Sizes

DN25 thru DN50 (1" thru 2")

Tech Data Sheet

Contact Tyco for details

Designed for high volume (cubic feet of air per minute) at the moderate pressures required for the system ■ Sized properly, these will fill the system to 2.76 bar (40 psi) of air pressure in approximately 30 minutes as required in NFPA 13

Electrical Devices

Riser Mounted Air Compressor

Fully Automatic



Tech Data Sheet

Contact Tyco for details

Fully automatic and are designed for easy installation ■ Special mounting kits are available to facilitate riser mounting ■ Sized properly, these compressors will fill a system to 2.76 bar (40 psi) within 30 minutes as required in NFPA 13

Model G16AC812

Automatic Supervisory Air Supply



Approvals

UL Listed & CSA Certified

Nominal Supervisory Air Pressure

0,7 bar (10 psi)

Tech Data Sheet

TFP1620

Supplies and maintains air in single interlock preaction fire protection systems ■ Can be mounted on the floor, on a wall, or to the system riser using optional brackets

Electrical Devices

DAP Series

Dry Air Pac™

General's DAP Series Dry Air Pac™ is an FM Approved, twin tower regenerative dryer / compressor package. This turnkey system is designed to provide the sprinkler system with moisture free air to a -40°F Dew Point. The air compressor is designed to fill the sprinkler system in accordance with NFPA 13 standards, as well as provide the higher pressure needed to allow the twin tower regenerative dryer to function properly.

Prior to entering the regenerative air dryer, an air cooled aftercooler cools the compressor's hot discharge air to a maximum 100°F. A coalescing prefilter with differential pressure gauge removes oil vapor and other contaminants that can destroy the desiccant in the dryer towers. A combination particulate filter and regulator prevents downstream migration of desiccant dust while regulating air pressure to the sprinkler system.

The Dry Air Pac™ is controlled by one integrated control panel complete with flow diagram display, 120 volt control circuit with indicating lights for tower drying, drain valve activation and compressor operation, along with panel mounted hour meter, separate drain valve duration and interval controls, drain valve on/off switch and panel control on/off switch. Four panel-mounted pressure gauges are provided for receiver, outlet and drying tower pressures. Purge set pressure gauge is separately mounted and conveniently located at the purge valve for ease of setting the purge flow.

All components are pre-piped, pre-tested, and pre-wired for ease of mechanical and electrical installation on site. Each unit includes a UL Listed, FM Approved Air Maintenance Device. -100°F dew point is achievable - consult factory for details.

Applications for the Dry Air Pac™ include, but are not limited to Freezer Rooms, Cold Storage Warehouses, Attic Spaces and Parking Garages.



Approvals

FM Approved

Tech Data Sheet

Contact Tyco for details

Combination afterfilter and regulator ■ A separate port is provided for attachment of a dewpoint-monitoring device ■ Oversized mufflers ■ Fully integrated control panel ■ Compact air cooled after cooler ■ Prefilter with differential pressure ■ Vibration pads ■ The Dry Air Pac™ comes fully charged with desiccant so that no on-site desiccant installation is required at startup ■ Separate desiccant fill and drain ports are provided to allow re-charging of the dryer tanks without disassembly of the dryer component piping ■ A coalescing filter, with integral differential pressure gauge, removes oil and water droplets prior to entry to into the desiccant dryer ■ The single stage compressor allows for maximum efficiency. Standard equipment includes intercooler, oil fill/breather, oil sight glass and easily removable drain plug



Electrical Devices

LHD


Linear Heat Detection Cable

The Linear Heat Detection (LHD) cable is a combination of advanced polymer and digital technologies which can be used on any panel, and can detect heat anywhere along its entire length.

At the core of the LHD cable is a twisted pair of extremely low resistance, tri-metallic conductors, sheathed in new advanced thermal polymers. These polymers are chemically engineered to break down at specific fixed temperatures allowing the twisted conductors to make contact and initiate an alarm. The polymer used for the protective outer coating of LHD cable is chemical resistant and UV protected. This allows the LHD cable be used in a wide variety of installations and special hazard applications.

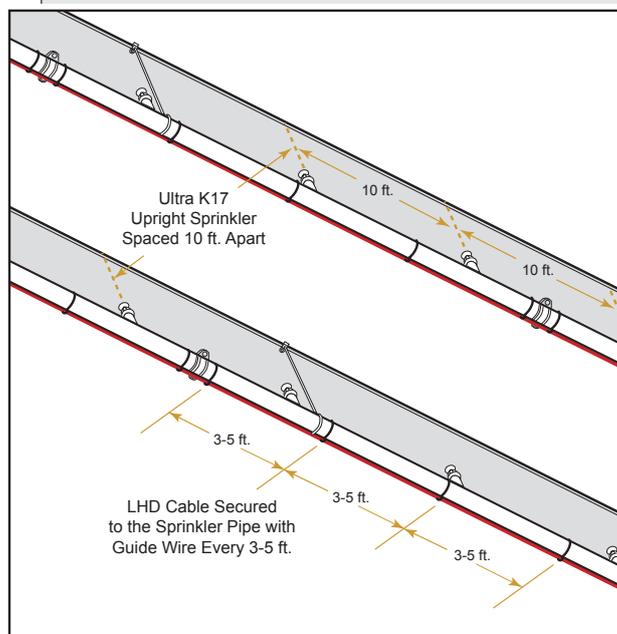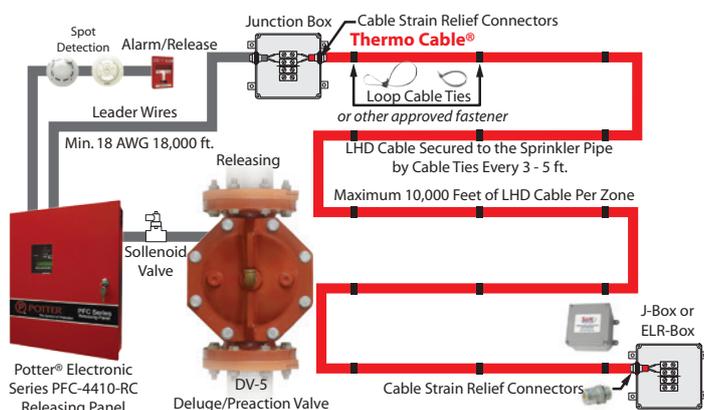

Linear Heat Detection Cable allows a Quell designed fire sprinkler system to be more efficient by quickly recognizing the fire, and conveying the information back to the fire alarm panel.

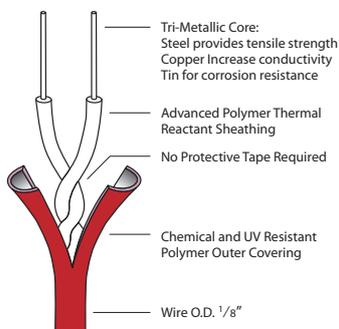

Approvals	UL, C-UL Listed & FM Approved
Temperature Range	68°C (155° F) (typical temperature) 78°C (172° F), 88°C (190° F) 105°C (220° F)
Available Jacket Material	Polypropylene, PVC, Nylon
Resistance	0.05 ohms/ft Resistance per Twisted Pair
RF Tested	Up to 10,000 linear ft.
Tech Data Sheet	Contact Tyco for details

Ideal for double interlock preaction detection ■ Install up to 10,000 linear feet per zone ■ Compatible with any conventional releasing panel listed for fire ■ Can detect heat anywhere along the entire length of cable ■ Multiple alarm temperatures can be incorporated in the same zone ■ Easy to add a module ■ Lower material & installation cost



Corrosion Solutions

Corrosion in fire sprinkler systems leads to plugging problems, diminished sprinkler performance, water leak damage and reduced service life. The Model NG-1 nitrogen generator is at the heart of the Tyco corrosion solutions portfolio.

Return on Investment (ROI) for Tyco Corrosion Solutions

- Greatly reduces corrosion risks
- Extends the useful life of a water-based fire sprinkler system
- Minimizes risk of business interruption due to leaks

Corrosion Solutions

Model NG-1 100, NG-1 250, and NG-1 500

Wall-Mounted Nitrogen Generator



Air Compressor	Integral
Approvals	CE and FM Approved UL508A Listed Industrial Control Panel
Total System Capacity	NG-1 100 - 2555 L (675 Gal) NG-1 250 - 3596 L (950 Gal) NG-1 500 - 7571 L (2000 Gal)
Nitrogen Membrane	Capable of 98%+ Nitrogen Purity
Temperature Rating	4.5°C (40°F) to 40°C (105°F)
Power Supply	120 VAC/1phase/60Hz (230 VAC/1 phase/50Hz)
Tech Data Sheet	TFP1251

Mitigating Fire Sprinkler System Corrosion ■ Compatible with both new and existing fire sprinkler systems ■ Integral oil-less compressor ■ Fill-and-purge breathing method allows vent to be installed on riser ■ No nitrogen tank or refrigerated dryers required ■ Minimal footprint allowing for easy installation in riser room ■ Replacing oxygen in the system with nitrogen can stop the corrosion process and extend the service life of a sprinkler system

Model NG-1 1000

Skid-Mounted Nitrogen Generator



Air Compressor	Integral
Approvals	CE and FM Approved UL508A Listed Industrial Control Panel
Total System Capacity	NG-1 1000 - 12113 L (3200 Gal)
Nitrogen Membrane	Capable of 98%+ Nitrogen Purity
Temperature Rating	4.5°C (40°F) to 40°C (105°F)
Power Supply	120 VAC/1phase/60Hz (230 VAC/1 phase/50Hz)
Tech Data Sheet	TFP1252

Mitigating Fire Sprinkler System Corrosion ■ Compatible with both new and existing fire sprinkler systems ■ Integral oil-less compressor ■ Fill-and-purge breathing method allows vent to be installed on riser ■ No nitrogen tank or refrigerated dryers required ■ Designed on single skid for easy installation ■ Replacing oxygen in the system with nitrogen can stop the corrosion process and extend the service life of a sprinkler system

Corrosion Solutions

Model NG-1 1150, NG-1 1500, NG-1 2000, and NG-1 3000

Stand-Alone Nitrogen Generator



Air Compressor	Separate
Approvals	CE and FM Approved UL508A Listed Industrial Control Panel
Total System Capacity	NG-1 1150 - 24605 L (6500 Gal) NG-1 1500 - 41640 L (11000 Gal) NG-1 2000 - 70030 L (18500 Gal) NG-1 3000 - 85172 L (22500 Gal)
Nitrogen Membrane	Capable of 98%+ Nitrogen Purity
Temperature Rating	4.5°C (40°F) to 40°C (105°F)
Power Supply	120 VAC/1phase/60Hz (230 VAC/1 phase/50Hz)
Tech Data Sheet	TFP1253

Mitigating Fire Sprinkler System Corrosion ■ Designed to support projects with larger system capacities ■ Compatible with both new and existing fire sprinkler systems ■ Paired with oil-lubricated oil compressor ■ Fill-and-purge breathing method allows vent to be installed on riser ■ No nitrogen tank or refrigerated dryers required ■ Designed on single skid for easy installation ■ Replacing oxygen in the system with nitrogen can stop the corrosion process and extend the service life of a sprinkler system

Model TILD

In-Line Corrosion Detector



Sizes	DN32 thru DN200 (1-1/4" thru 8")
Approvals	UL Listed
Pipe Schedule	Schedule 10 or 40
Temperature Rating	-40°C (-40°F) to 49°C (120°F)
Service Pressure	12 bar (175 psi)
Tech Data Sheet	TFP1261

Mitigating Fire Sprinkler System Corrosion ■ Corrosion Detector - Installed In-Line for Real-Time Monitoring ■ Monitor locally with included Remote Test Station or remotely via the building monitoring system ■ Available in galvanized or black steel; schedule 10 or 40 ■ Roll-grooved ends for easy installation

Corrosion Solutions

Model TAV-D

Manual Air Vent - Dry Systems



System Connection	1" NPT Male
Temperature Rating	4.5°C (40°F) to 49°C (120°F)
Service Pressure	Up to 12 bar (175 psi)
Tech Data Sheet	TFP1262

Oxygen Removal Vent for Dry/Preaction Systems - Manual Shut-off ■ Designed for use with the NG-1 Nitrogen Generators ■ Can be installed directly on system riser ■ Nitrogen gas sampling port for use with THGA or TSGA Gas Analyzers ■ Includes failsafe back-pressure regulator ■ Automatic float shut-off in event of a system trip

Model TSV-D

SMART Air Vent - Dry Systems



System Connection	1" NPT Male
Temperature Rating	4.5°C (40°F) to 49°C (120°F)
Electrical Connection	120 VAC/60Hz (230 VAC/50Hz); <2 Amps
Service Pressure	Up to 12 bar (175 psi)
Tech Data Sheet	TFP1263

Oxygen Removal Vent for Dry/Preaction Systems - Electronic Shut-off ■ Designed for use with the NG-1 Nitrogen Generators ■ Can be installed directly on system riser ■ Will automatically shut off after 14-day nitrogen fill-and-purge process ■ Includes failsafe back-pressure regulator ■ Automatic float shut-off in event of a system trip

Model TAV-W

Automatic Air Vent - Wet Systems



System Connection	1/2" NPT Male
Approvals	UL Listed and FM Approved
Temperature Rating	4.5°C (40°F) to 49°C (120°F)
Service Pressure	Up to 12 bar (175 psi)
Tech Data Sheet	TFP1264

Oxygen Removal Vent for Wet Systems ■ Remove trapped air from wet fire sprinkler systems ■ Redundant float valve design to eliminate risk of leaks - no need to plumb to drain ■ High-visibility pressure gauge easily seen from floor to confirm functionality ■ Can be upgraded for Wet Pipe Nitrogen Inerting

Corrosion Solutions

Model TAV-WN

Air Vent, Wet - Nitrogen



System Connection	1/2" NPT Male
Approvals	UL Listed and FM Approved
Temperature Rating	4.5°C (40°F) to 49°C (120°F)
Service Pressure	Up to 12 bar (175 psi)
Tech Data Sheet	TFP1265

Oxygen Removal Vent for Wet Systems - Wet Pipe Nitrogen Inerting ■ Remove trapped air from wet fire sprinkler systems ■ Includes TNIP Nitrogen Inerting Port for Wet Pipe Nitrogen Inerting process ■ Redundant float valve design to eliminate risk of leaks - no need to plumb to drain ■ High-visibility pressure gauge easily seen from floor to confirm functionality ■ Can be used with TRIS Remote Inerting Station (sold separately) during WPNI process

Model TNIP

Nitrogen Injection Port



System Connection	1/2" NPT Male (vent.) 1" NPT Male (Port)
Approvals	UL Listed and FM Approved
Temperature Rating	4.5°C (40°F) to 49°C (120°F)
Service Pressure	Up to 12 bar (175 psi)
Tech Data Sheet	TFP1265

Nitrogen Injection Port for use during Wet Pipe Nitrogen Inerting Process ■ For use during the Wet Pipe Nitrogen Inerting Process ■ Installed on riser on the system side of the main control valve ■ Also available with TAV-WN Automatic Air Vent

Model TRIS

Remote Inerting Station



Approvals	UL Listed and FM Approved
Temperature Rating	4.5°C (40°F) to 49°C (120°F)
Service Pressure	Up to 12 bar (175 psi)
Tech Data Sheet	TFP1265

Control Station for Remote Monitoring of TAV-WN Air Vent ■ For use during the Wet Pipe Nitrogen Inerting Process ■ Provides remote monitoring and control options for the TAV-WN Automatic Air Vent

Corrosion Solutions

Model TNIK

Nitrogen Inerting Kit



Size	9,5mm x 7,6m (3/8" x 25 foot)
Hose Pressure Rating	Up to 21 bar (300 psi)
Regulator Max. Inlet Pressure	207 bar (3000 psi)
Tech Data Sheet	TFP1266

Start-up Kit for Using Nitrogen Cylinders during Wet Pipe Nitrogen Inerting Process ■ For use with pressurized nitrogen gas cylinders as part of Wet Pipe Nitrogen Inerting process ■ Includes 9,5mm (3/8") rubber hose, nitrogen cylinder regulator, and industrial brass couplers

Model THGA

Handheld Gas Analyzer



Sensor Type	Galvanic Cell with temperature compensation
Operating Pressure Rating	Atmospheric pressure to 0,2 bar (3 psig)
Operating Temperature	15°C to 40°C (59°F to 104°F)
Measured Range	0.0% to 99.9% nitrogen
Response Time	<15 seconds for 90% step change
Tech Data Sheet	TFP1267

Handheld Gas Analyzer for use with Dry or Wet Pipe Nitrogen Inerting ■ Displays nitrogen purity of the gas stream being sampled ■ Lithium battery powered ■ One-touch calibration ■ Includes tubing and quick connect fitting compatible with TYCO Nitrogen products ■ Also available as part of TGSK Gas Sampling Kit

Model TGSP

Gas Sampling Port



Material	All industrial brass components
Tech Data Sheet	TFP1267

Gas Sampling Port for Dry Pipe Nitrogen Inerting Monitoring ■ For use with THGA Handheld Gas Analyzer ■ Equipped with 12,7mm (1/2") isolation valve ■ 6,4mm (1/4") quick connect socket ■ Also available as part of TGSK Gas Sampling Kit

Corrosion Solutions

Model TGSK

Gas Sampling Kit



Sensor Type	Galvanic Cell with temperature compensation
Operating Pressure Rating	Atmospheric pressure to 0,2 bar (3 psig)
Operating Temperature	15°C to 40°C (59°F to 104°F)
Measured Range	0.0% to 99.9% nitrogen
Response Time	<15 seconds for 90% step change
Tech Data Sheet	TFP1267

Gas Sampling Components to monitor Dry Pipe Nitrogen Inerting ■ Monitor the nitrogen concentration in a sprinkler system equipped with a TYCO Nitrogen Generator ■ Includes the THGA Handheld Gas Analyzer and TGSP Gas Sampling Port

Model TNIM

Nitrogen Inerting Manifold



Hose Size	9,5mm x 7,6m (3/8" x 25 foot)
Hose Pressure Rating	Up to 21 bar (300 psi)
Nitrogen/Air Connection	Inlet: 1/2" NPT Female Outlet: 1/4" Quick Disconnect
Tech Data Sheet	TFP1268

Inerting Manifold for the Wet Pipe Nitrogen Inerting Process ■ For use with TNIP Nitrogen Inerting Port ■ Includes gas sampling port to verify nitrogen concentration at the inlet supply ■ Single pressure regulator to regulate nitrogen delivery pressure to the discharge connection

Corrosion Solutions

Model TNIC

Nitrogen Interface Controller



Power Supply	230 VAC/Single Phase/50 Hz - Dedicated Circuit (120 VAC/Single Phase/60 Hz -Dedicated Circuit)
Nitrogen/Air Connection	Inlet: 1/2" NPT Female Outlet: 1/2" NPT Female
Tech Data Sheet	TFP1269

Interface Controller for Dry Pipe Inerting Process ■ Use with house/plant nitrogen source for controlling oxygen corrosion in dry/preaction systems ■ Can be used with TYCO NG-1 Nitrogen Generators to control multiple systems operating at different pressures

Model TSGA

SMART Gas Analyzer



Sensor Type	Zirconium Dioxide
Electrical Connections	120 VAC, 60 Hz/0.5 A 230 VAC, 50 Hz/0.5 A 24 VDC/2 A
Temperature Range	5°C to 40°C (40°F to 105°F)
Output Display	%O ₂ or %N ₂
Signal Output	4 mA to 20 mA linear output 0 VDC to 5 VDC linear output,
Percentage of O ₂ Contact Closure Level	1%, 3%, or 5%
Tech Data Sheet	TFP1270

Electronic Gas Analyzer for use with Dry or Preaction Systems ■ Continuous real-time monitoring of Nitrogen/Oxygen concentration levels ■ Can be monitored by building information management or fire alarm systems ■ Pair with either TAV-D Manual Air Vent or TSV-D Smart Air Vent

Model TNST-200

Nitrogen Storage Tank



Capacity	768 L (203 gal)
Working Pressure	13.8 bar (200 psi)
Temperature Range	-29°C to 232°C (-20°F to 450°F)
Standards	ASME Boiler and Pressure Vessel Code Section VIII, Div. 1* *Applies to Tank and Pressure Relief Valve
Tech Data Sheet	TFP1272

Nitrogen Storage Tank for Wet Pipe Nitrogen Inerting Process ■ Designed for use with TYCO NG-1 Nitrogen Generators during the Wet Pipe Nitrogen Inerting process ■ Install in-line between the Nitrogen Generator and the wet pipe sprinkler system riser

Index

Model #	Page	Model #	Page	Model #	Page
40-5	101	ELO SW-24	16	PS10	106
4410-RC	108	ELO-231	26	PS40	106
ACC-1	76	ELO-231 FRB	26	QRS	76
AD-1	94	ELO-231B	25	RAVEN	49
AD-2	94	ELOC	17	RAVEN Studio Sprinkler	49
ADACAP	101	Escutcheon Plates	60-61	RC-1	71
AMD-1	77	ESFR-14	25	RCP-1	39
AMD-2	77	ESFR-17	22-24	RED-E-Cabinet	83
AMD-3	77	ESFR-22	22	Resi-Riser	73
AQUAMIST System	95	ESFR-25	21	RFII	7-8, 18
ASV-1	89	ESFR-34	21	RFII-MRI	7, 18
Attic	48	F822 thru F834 Mulsifyre	66	RFIII	19
AV-1-300	70	F822S thru F834S Mulsifyre	66	RM-1	71
B-1	66	FH-1	67	RM-2	72
BFV-300	87	Figure 577	97	RSV-1	73
CC1	52	Figure 579	97	RV-1A	85
CC2	52	Figure 705	98	SF-1	93
CC3	53	Figure 707	98	Signs	93
CHEC	17	Figure 71	99	TAV-D	115
Cooling Tower Nozzle	67	Figure 716	98	TAV-W	115
CPVC	104	Figure 730	99	TAV-WN	116
CPVC Pipe	103	FL-1	91	TD-2	72
CV-1F	88	FSV-1	89	TFP PH2	50
CV-1FR	71	FTR-1	56	TFP PH5	50
CV-300B	88	G16AC812	109	TGSK	118
CWS	51	G5	46	TGSP	117
D3	63	Grooved Fittings	100	THGA	117
D3S	63	Hangers	94	TILD	114
D4a	65	HV "High Velocity"	63	TJP	86
DAP Series	110	ILLUSION	8	TJR	86
DD-1	91	Issue D Quartzoid	53	TN-17	65
DDS	68	K17-231	25	TN-25	64
DP-1	89	Lansdale Powerball 300	88	TNIC	119
DPV-1	75	LD "Large Drop"	27	TNIK	117
DS-1	41-42	LFII	33-37	TNIM	118
DS-1 Stainless Steel	42-43	LFII - NFPA 13 Optimized	38-39	TNIP	116
DS-2	44	LHD	111	TNST-200	119
DS-3	46	MC-1	91	TRIS	116
DS-8	43	Model A	92	TSGA	119
DS-C	45	Model B-1	92	TSV-D	115
DS-ECC	45	Model C	92	TY-B	5, 27, 28, 54, 57, 58
DSB-2	46	NG-1 100	113	TY-FRB	6, 15, 28, 29, 55, 57, 58
DV-5A	79	NG-1 1000	113	TY-FRL	10, 16, 30
EA-1	64	NG-1 1150	114	TY-L	9, 29, 56
EC-11	12	NG-1 1500	114	Type DN-5	68
EC-14	12	NG-1 2000	114	ULTRA K-17	24
EC-25	12	NG-1 250	113	VIZOR	76
EC-5	14	NG-1 3000	114	VSR	106
EC-8	13	NG-1 500	113	WMA-1	73
EC-8C	13	OSY-SU	107	WS	51
EC-HS	15	PCVS	107		
ELO SW-20	16	PRV-1A	85		

Description	Page	Description	Page
3, 6 or 12 Capacity	61	Dry Type Recessed Horizontal Sidewall	37
Air Maintenance Device	77	Dry Type Recessed Pendent	37
Air Supply	109	Dry-Type Pendent	24
Air Vent, Wet - Nitrogen	116	DS-1 Dry Sprinkler Guards	46
Alarm Switch	107	Duct Deluge System	68
Alarm Valve	70	Duct Nozzle, Corrosion Resistant	68
Alternate Materials Of Construction	57	Elbows, Tees, Reducers, Caps, Crosses and Flange Adapters	100
AQUAMIST System	95	Electric Actuation	80 - 81
Attic Plus	48	Electric Actuation Trim Shown	80
Automatic Air Vent - Wet Systems	115	Electric/Electric Actuation	82
Automatic Drain Valve	94	Electrical Devices	105 - 111
Automatic Protectospray Directional Spray Nozzle	64	Electronic Accelerator	76
Automatic Shut-Off Valve, Trim Component	89	Electronic Dry Pipe Accelerator	76
Automatic Supervisory Air Supply	109	End of Line Sprinkler Fitting	101
Automatic Type Mist Nozzle	95	Escutcheon Plates	60 - 61
Back-to-Back Attic	48	Extended Coverage Sprinklers	11 - 19, 42 - 46
Back-to-Back Fittings	104	External Resetting Deluge Valve	79
Base Mounted Air Compressor	108	Extra Large Orifice Concealed Pendent	17
Boot, Dry Sprinkler	46	Fail-Safe Valve, Trim Component	89
Bronze Butterfly Valve	88	Fire Department Connections	93
Combustible Concealed Space Sprinklers, Upright	52 - 53	Fittings	103
Compressor Control Type Air Maintenance Device	77	Fixed Temperature Release	56
Concealed Horizontal Sidewall	8, 17, 19, 36	Flange Adapter	99
Concealed Pendent	7, 8, 18, 36, 45	Flat Plate Concealed Horizontal Extended Coverage Sidewall	19
Control Mode Specific Application	24, 27	Flat Plate Concealed Pendent	35
Control Valve Supervisory Switch	107	Flexible Coupling	98
Conventional (Old Style)	54 - 55	Flexible Hose	67
Cooling Tower Nozzle	67	Flexible Reducing Coupling	98
Copper Fitting to CPVC	104	Flow & Pressure Switch	106
Corrosion Resistant Duct Nozzle, Open, Medium Velocity	68	Foam-Water Sprinkler	66
Corrosion Solutions	112 - 119	for Model ESFR-25 Pendent Sprinkler	31
Cover Plate for Concealed Sprinklers	36	For The Protection of Ventilation Ductwork Handling Corrosive Gases	68
CPVC Hangers	104	Fully Automatic	109
CPVC Pipe & Fittings	102 - 104	Fusible Links	91
CPVC Supplies	104	Gas Sampling Kit	118
CPVC to Copper Fitting	104	Gas Sampling Port	117
Cross Wall Indicator Post	86	General Purpose Valves	84 - 89
Deluge Systems	78 - 83	GRINNELL Grooved Piping Products	96 - 101
Deluge Systems	80	Grooved Butterfly Valve	87
Deluge Valve, External Resetting	79	Grooved Check Valve	88
Directional Spray Nozzle	63 - 66	Grooved End Swing Check Valve	88
Domed Concealed	38	Grooved Flexible Coupling	98
Domed Plate Concealed Pendent	36	Handheld Gas Analyzer	117
Double Interlock Preaction Systems	82	High Temperature Sprinklers	53
Drum Drip	91	High Velocity	63
Dry Air Pac	110	Horizontal Sidewall	5, 6, 9, 10, 12, 14 - 16, 19, 34 - 36, 38 - 39, 41 - 43, 46, 49, 50, 51, 57, 58
Dry Pilot Actuation	80 - 81	Horizontal Spray Nozzle, Open	64 - 65
Dry Pilot Actuator	89	How the AQUAMIST System Works	95
Dry Pipe Sprinkler Systems	108	Identification Signs	93
Dry Pipe Valve	75	In-Line Corrosion Detector	114
Dry Pipe Valve Accelerator	76	Institutional Sprinklers	49, 50
Dry Sprinkler Boot	46		
Dry Sprinklers	40 - 46		
Dry System Valves & Devices	74 - 77		

Always refer to the product's Technical Data Sheet for a complete description of all Listing and Approval criteria, design parameters, installation instructions, care and maintenance guidelines, and our limited warranty.

Index

Description	Page	Description	Page
Integrated Fire Protection Packages	83	Remote Resetting Trim Shown	80
Intermediate Level Sprinklers	27 - 30	Residential	73
Large Drop	27	Residential Control Panel	39
LFII NFPA 13 Optimized Sprinklers	38 - 39	Residential Shutoff Valve	73
Linear Heat Detection Cable	111	Resilient-Seated Gate Valves	86
Manual Air Vent - Dry Systems	115	Retard Chamber	71
Manual Control Station	91	Rigid Coupling	97
Materials Of Construction, Alternate	57	Riser Check Valve	71
Mechanical Tees & Crosses	99	Riser Manifolds	71 - 72
Mist Control Center (MCC) Pump Skid Unit AQUAMIST	95	Riser Mounted Air Compressor	109
Mulsifyre	66	SHB1 Head Set, CPVC	104
Nitrogen Air Vent, Wet	116	Sight Flow Connection	93
Nitrogen Inerting Kit	117	Single Directional Attic	48
Nitrogen Inerting Manifold	118	Single Interlock Preaction Systems	81
Nitrogen Injection Port	116	Skid-Mounted Nitrogen Generator	113
Nitrogen Interface Controller	119	SMART Air Vent - Dry Systems	115
Nitrogen Maintenance Device	77	SMART Gas Analyzer	119
Nitrogen Storage Tank	119	Solenoid Valve	107
Non-Automatic Open Type	95	Special Purpose Sprinklers	47 - 58
Non-Rising Stem Valve	86	Specialty Items & AQUAMIST	90 - 95
Nozzle Accessories	62 - 68	Specific Application Concealed Pendent Vertical Sidewall Window Sprinkler	51
Nozzles	62 - 68	Spray Nozzle	64
One-Bolt Rigid Coupling	97	SprinkCAD Software Suite Overview	123
One-Piece Flat Escutcheon	60	Sprinkler Accessories	59 - 61
Outside Screw and Yoke	86	Sprinkler Guards	30 - 31
Pendent 5, 6, 9, 10, 12 - 14, 21 - 30, 33 - 34, 36, 38, 41 - 44, 49, 56 - 58, 66		Sprinkler Head Cabinet	61
Pipe Hangers	94	Sprinkler Pipe	103
Pipe Line Strainers	92	Sprinkler Shield	30 - 31
Pneumatic/Electric Actuation	82	Stand-Alone Nitrogen Generator	114
Poly-Stainless	58	Standard Spray Sprinklers	4 - 10
Preaction Systems	78 - 83	Storage Sprinklers	20 - 31
Pressure alarm Switch	106	Straight & 90° Fire Department Connections	93
Pressure Reducing Type Air Maintenance Device	77	Strap Outlets	101
Pressure Reducing Valve Pilot Operated	85	Studio Sprinkler, RAVEN	49
Pressure Relief Valve Pilot-Operated	85	Supervisory Air Supply	109
Protective Cap Utility Tool for Concealed Sprinklers	36	Tamper Switch	107
Protective Paint Caps	60	Tank Mounted Air Compressor	108
Protectospray Directional Spray Nozzle	63	Test & Drain Valve	72
Pump Skid Unit AQUAMIST	95	Trim Valves	89
Quartzoid	53	Two-Piece Escutcheon	60 - 61
RAPID RESPONSE Sprinklers	32 - 39	Type 1 and 2	67
Rapid Seal Adapter (RSA) Fittings	103	Upright 5, 6, 9, 10, 12, 22, 24 - 30, 36, 41, 57, 58, 66	
RAVEN Studio Sprinkler	49	Vertical Indicator Post	86
Recessed Escutcheons	60	Vertical Sidewall	5, 6, 51, 57
Recessed Horizontal Sidewall 5, 6, 9, 10, 14 - 16, 19, 34 - 35, 38 - 39, 42, 43, 46, 51, 57		Wafer Style Butterfly Valve	87
Recessed Pendent 13, 14, 21 - 30, 33 - 34, 38, 41 - 44, 49, 56		Wall-Mounted Nitrogen Generator	113
Releasing Panel	108	Water Motor Alarm	73
Releasing Service	107	Waterflow Alarm Switch	106
Remote Inerting Station	116	Wet Pilot Actuation	80 - 81
Remote Resetting	80 - 81	Wet System Valves & Devices	69 - 73
Remote Resetting Pressure Reducing	80 - 81	Wet Systems Automatic Air Vent	115
		Wiliag Condensate Drain	91
		Window Sprinklers	51

Always refer to the product's Technical Data Sheet for a complete description of all Listing and Approval criteria, design parameters, installation instructions, care and maintenance guidelines, and our limited warranty.



Advanced Software for the Fire Protection Professional



SprinkCAD™ 3D

Users can design in full-3D using fast, accurate drawing and editing tools



SprinkCODE™ Connect

This web-based, interactive code guide includes multiple editions of NFPA and EN codes



SprinkCALC

Perform hydraulic calculations and easily share them with an approving authority



SprinkFDT

This tool is the only UL Listed software for calculating fluid delivery time to optimize dry system design



SprinkSLIC

Users can create and interpret pipe fabrication schedules utilizing this standalone stocklisting software



REVIT® Tools for SprinkCAD

Optional add-on tools for use with SprinkCAD 3D™ or Classic help simplify Revit® design

About Johnson Controls:

At Johnson Controls, we transform the environments where people live, work, learn and play. From optimizing building performance to improving safety and enhancing comfort, we drive the outcomes that matter most. We deliver our promise in industries such as healthcare, education, data centers, and manufacturing. With a global team of 105,000 experts in more than 150 countries and over 130 years of innovation, we are the power behind our customers' mission. Our leading portfolio of building technology and solutions includes some of the most trusted names in the industry, such as Tyco®, ANSUL®, YORK®, Metasys®, Ruskin®, Titus®, Frick®, PENN®, Sabroe®, Simplex® and Grinnell®. For more information, visit www.johnsoncontrols.com or follow us @johnsoncontrols on Twitter

Australia & New Zealand

Tel: +61 3 9313 9700

Singapore & Southeast Asia

Tel: +65 6577 4360

India Region

+91 22 6628 6628

South Korea

Tel: +82 31 737 3881

Middle East

Tel: +971 4 455 0700

Taiwan, China; Hong Kong, SAR, China; Macau, SAR, China

Tel: +886 2 2698 3559

Products displayed are for visual representation only. Actual products may vary. The information provided in this brochure is provided for informational purposes only. The materials are general in nature; they are not offered as advice on a particular matter and should not be relied on as such. The materials contained in this brochure are the copyrighted property of Johnson Controls unless a separate copyright notice is placed on the material.

www.tyco-fire.com

© 2021 Johnson Controls. All rights reserved. FSP2021025 Rev. 07-20121

